




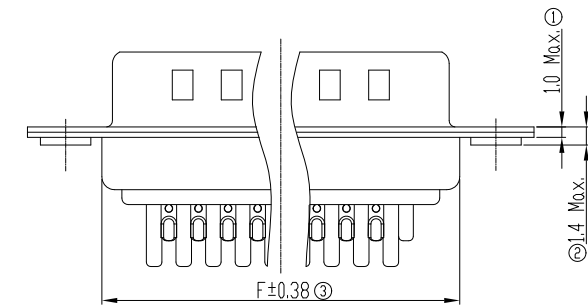

Performance characteristics:

1. Main body part material

Insulator: See part number rule

Contact terminal: Brass, 1.27μm Ni under plated,
outer plating see part number rule

Crust: SPCC; front shell plating Ni, back shell plating Sn

2. Electrical requirements:

Current rating: 3 A

Voltage rating: 300 V

Contact resistance: ≤25 mΩ

Insulation resistance: ≥5000 MΩ

Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

3. Mechanical requirements

Wire gauge: AWG 24~30

4. Environment specification

Working temperature: -40℃~+100℃

5. Applicable standard: IEC60807

6. Packing & storing

Method of packing: Tray , inner box, outer box

Storing condition: Temperature of -10℃~+40℃

below 80% relative humidity


7. Style of installation: Cable soldering installation

8. To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS


Size table

Pin number	A	B	C	D	E	F
15Pin	30.80	25.00	16.92	9.16	2.29	19.20
26Pin	39.20	33.30	25.25	18.32	2.29	27.70
44Pin	53.04	47.04	38.96	32.06	2.29	41.10
62Pin	69.40	63.50	55.42	48.20	2.41	57.30
78Pin	67.00	61.10	52.80	45.79	2.41	55.20

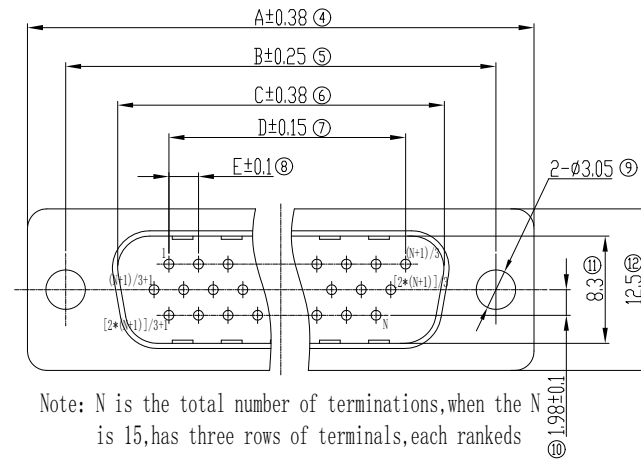


Note: N is the total number of terminations, when the N is 15, has three rows of terminals, each ranked

15, 26, 44, 62PIN

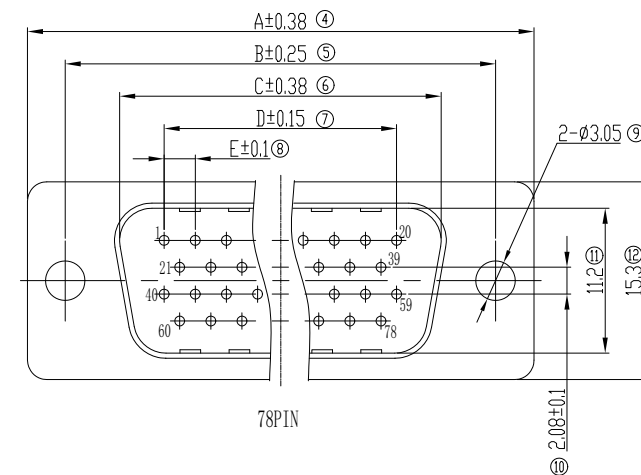

78PIN

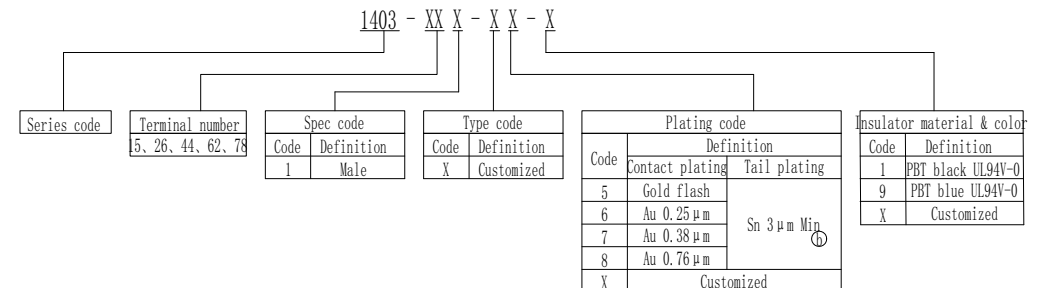

Mark	NO.	File NO.	Signature	Date
DRAW			lei	2008.12.8
CHK			Lawrence	2020.12.04
MAN				
STD			Juanli lai	2020.12.07
APP			Alan	2020.12.07

D-SUB
HD cable connector, solder cup
male

1403-XX1-XX-X

SLO. 1403. 100			
Projection	Rev.	Weight	Scale
	A5		
All Dimensions in mm Sheet 2 of 1			
SHINNING SHENZHEN SHINNING ELECTRONIC CO. LTD.			

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

A

B

D

A

E

C

I

E

X.	± 0.50	X. °	$\pm 3^\circ$
.X	± 0.38	.X°	$\pm 2^\circ$
.XX	± 0.25		