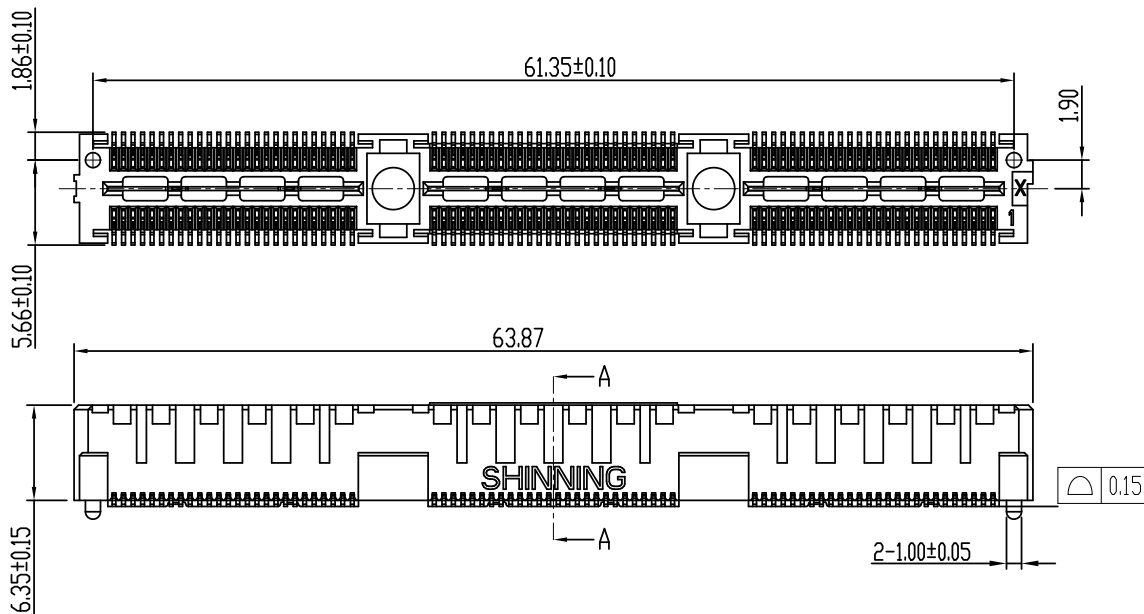


Performance characteristics:

1. Main body part material
 Insulator: LCP BLACK COLOR UL94V-0
 Contact terminal: Phosphor bronze, Ni 1.27 μm Underplated over all.
 mate area plating Au0.76 μm, Au0.08 μm plating at tail
 Fitting nail: Phosphor bronze, Ni 1.27 μm Underplated over all.
 mate area plating Au0.76 μm, Sn plating at tail


2. Electrical requirements:
 CURRENT RATING: 1.0A (at 20°C)
 Voltage rating: 18V
 Contact resistance: ≤30 mΩ Δ10mΩ
 Insulation resistance: ≥1000 MΩ
 Withstanding voltage: 500 Vr.m.s, 1mA, 60s

3. MECHANICAL REQUIREMENTS
 Mechanical life: 100 CYCLES

4. Environment specification
 Working temperature: -55°C~+125°C

5. Packing & storing
 Method of packing: outer box
 Storing condition: temperature of -10°C~+55°C
 below 80% relative humidity

6. Style of installation: solder cable installation
7. To prevent the pollution of the environment product info
 RoHS agreement: In line with the european union RoHS

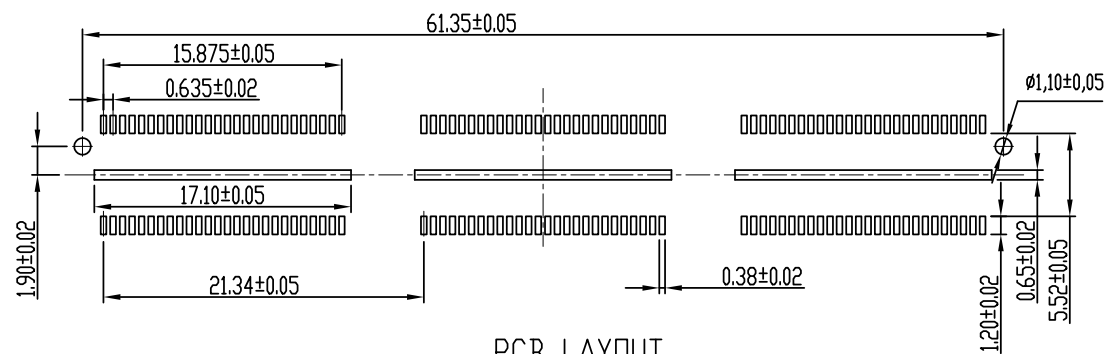

Unless otherwise specified tolerance:

X.	±0.50	X°	±3°
.X	±0.38	X°	±2°
.XX	±0.25		

					1763 Series 156Pin Double Edge Male	SLO. 1763. 001			
						PROJECTION	REV.	WEIGHT	SCALE
MARK	NO.	FILE NO.	SIGNATURE	DATE			A0		
DRAW	Frank 2018.07.19								
CHK	Lawrence2018.8.8								
MAN									
STD	Spring2018.8.8				1763-B01-74-3	All Dimensions in mm Sheet 1 of 1			
APP	Alan2018.8.8								
						SHINNING SHENZHEN SHINNING ELECTRONIC CO., LTD.			