
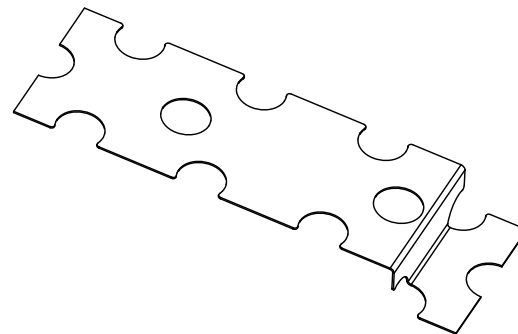
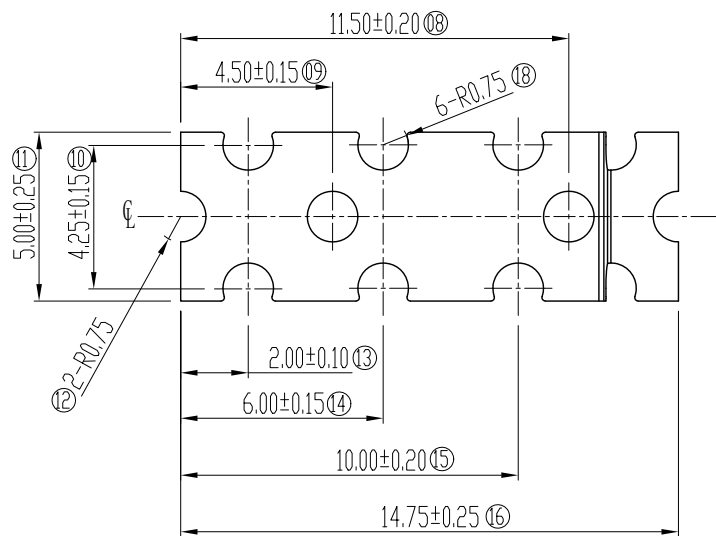


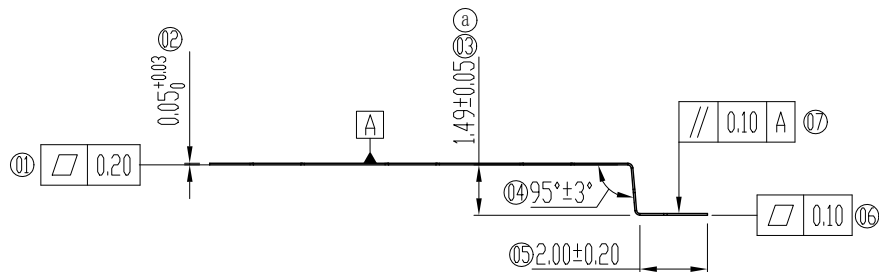

Performance characteristics:

1.Main body part material

Contact terminal: High conductivity copper,1.27~7.6μm Ni under plated,
Outer plating Sn 5.1μm Min.

2.Environment specification

Working temperature: -55℃~+125℃

3.Packing & storing

Method of packing: Tape&Reel、outer box

Storing condition: Temperature of -10℃~+40℃
below 80% relative humidity

4.Style of installation: SMT

5.To prevent the pollution of the environment product info

RoHS agreement:In line with the european union RoHS.

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

					Net Board L16*W5.0*T0.05	SL0.1916.021					
②	1	192038	Change Yu	2017.03.01		Projection	Rev.	Weight	Scale		
Mark	NO.	File NO.	Signature	Date			A1				
DRAW			Change Yu	2016.11.16							
CHK			Tim	2017.4.12	19166005	All Dimensions in  Sheet 1 of 1					
MAN											
STD			Spring	2017.4.17		 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.					
APP			Alan	2017.74.17							