

A

B

C

D

E



A

B

C

D

E

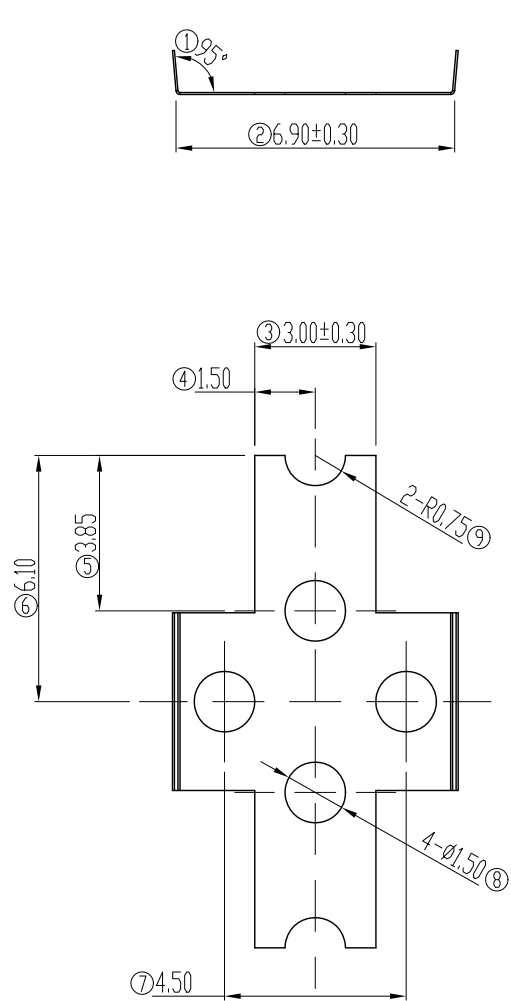

Performance characteristics:

1. Main body part material
Contact terminal: High conductivity copper, $1.27 \sim 7.6 \mu\text{m}$ Ni under plated,
Outer plating Sn $5.1 \mu\text{m}$ Min.
2. Environment specification
Working temperature: $-55^\circ\text{C} \sim +125^\circ\text{C}$
3. Packing & storing
Method of packing: Tape&Reel, outer box
Storing condition: Temperature of $-10^\circ\text{C} \sim +40^\circ\text{C}$
below 80% relative humidity
4. Style of installation: SMT
5. To prevent the pollution of the environment product info
RoHS agreement: In line with the European Union RoHS.

Unless otherwise specified tolerance:

X.	± 0.50	X. °	$\pm 3^\circ$
.X	± 0.38	.X °	$\pm 2^\circ$
.XX	± 0.25		

Mark	NO.	File NO.	Signature	Date	Net Board L12.2*W3.0*T0.05	SL0. 1916. 013			
DRAW		Change Yu	2015-11-25			Projection	Rev.	Weight	Scale
CHK							C0		
MAN						All Dimensions in mm Sheet 1 of 1			
STD					19166002	SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			
APP									