

A

B

C

D

E


A

B

C

D

E

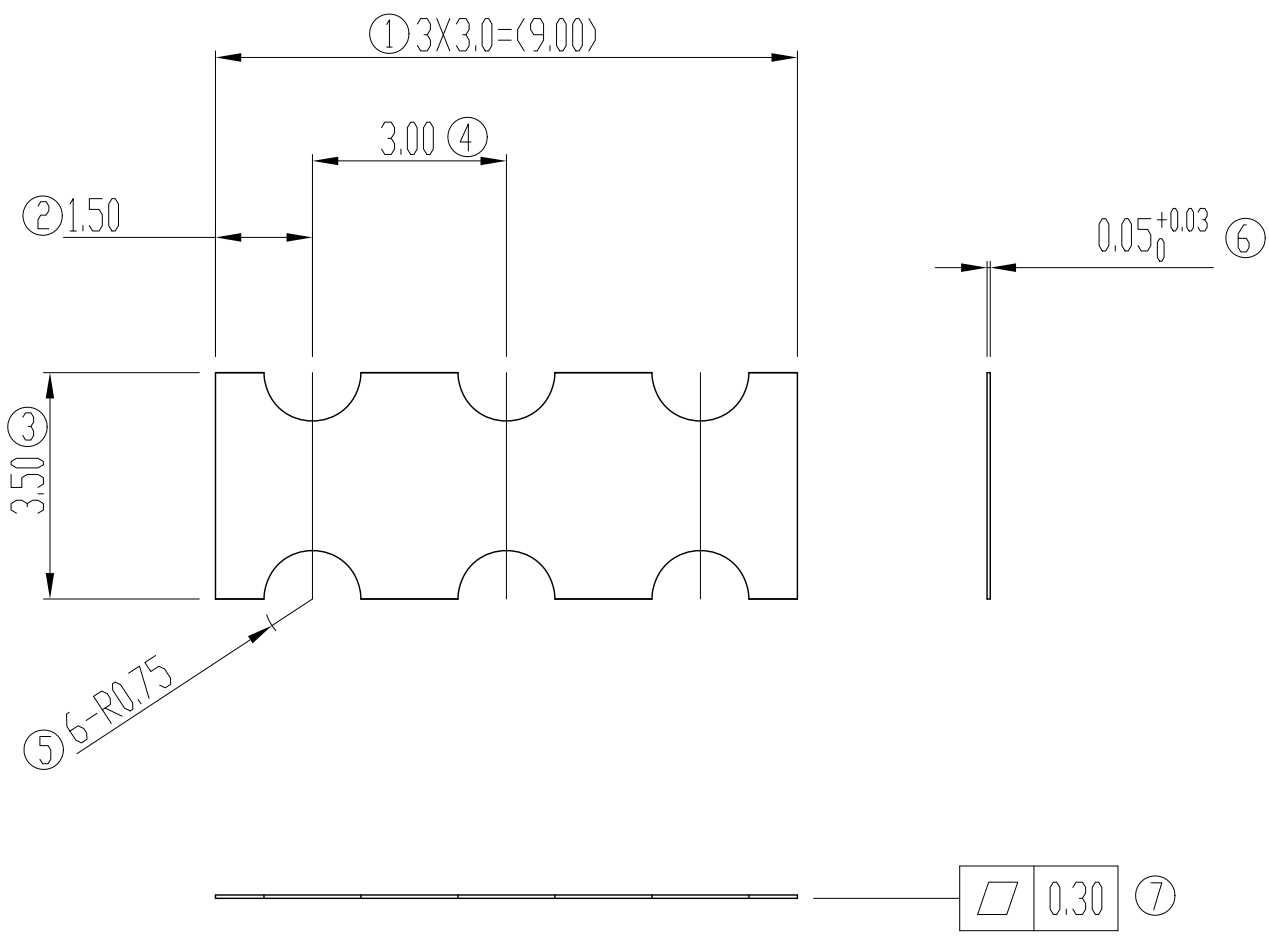

Performance characteristics:

1.Main body part material
Contact terminal: High conductivity copper,1.27~7.6μm Ni under plated,
Outer plating Sn 5.1μm Min.

2.Environment specification
Working temperature: -55℃~+125℃

3.Packing & storing
Method of packing: Tape&Reel、outer box
Storing condition: Temperature of -10℃~+40℃
below 80% relative humidity

4.Style of installation: SMT

5.To prevent the pollution of the environment product info
RoHS agreement:In line with the european union RoHS.

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

					Net Board L9.0*W3.5*T0.05	SL0.1916.014			
Mark	NO.	File NO.	Signature	Date		Projection	Rev.	Weight	Scale
DRAW		Change Yu	2015-05-26				A0		
CHK						All Dimensions in mm Sheet 1 of 1			
MAN					19166003	SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			
STD									
APP									