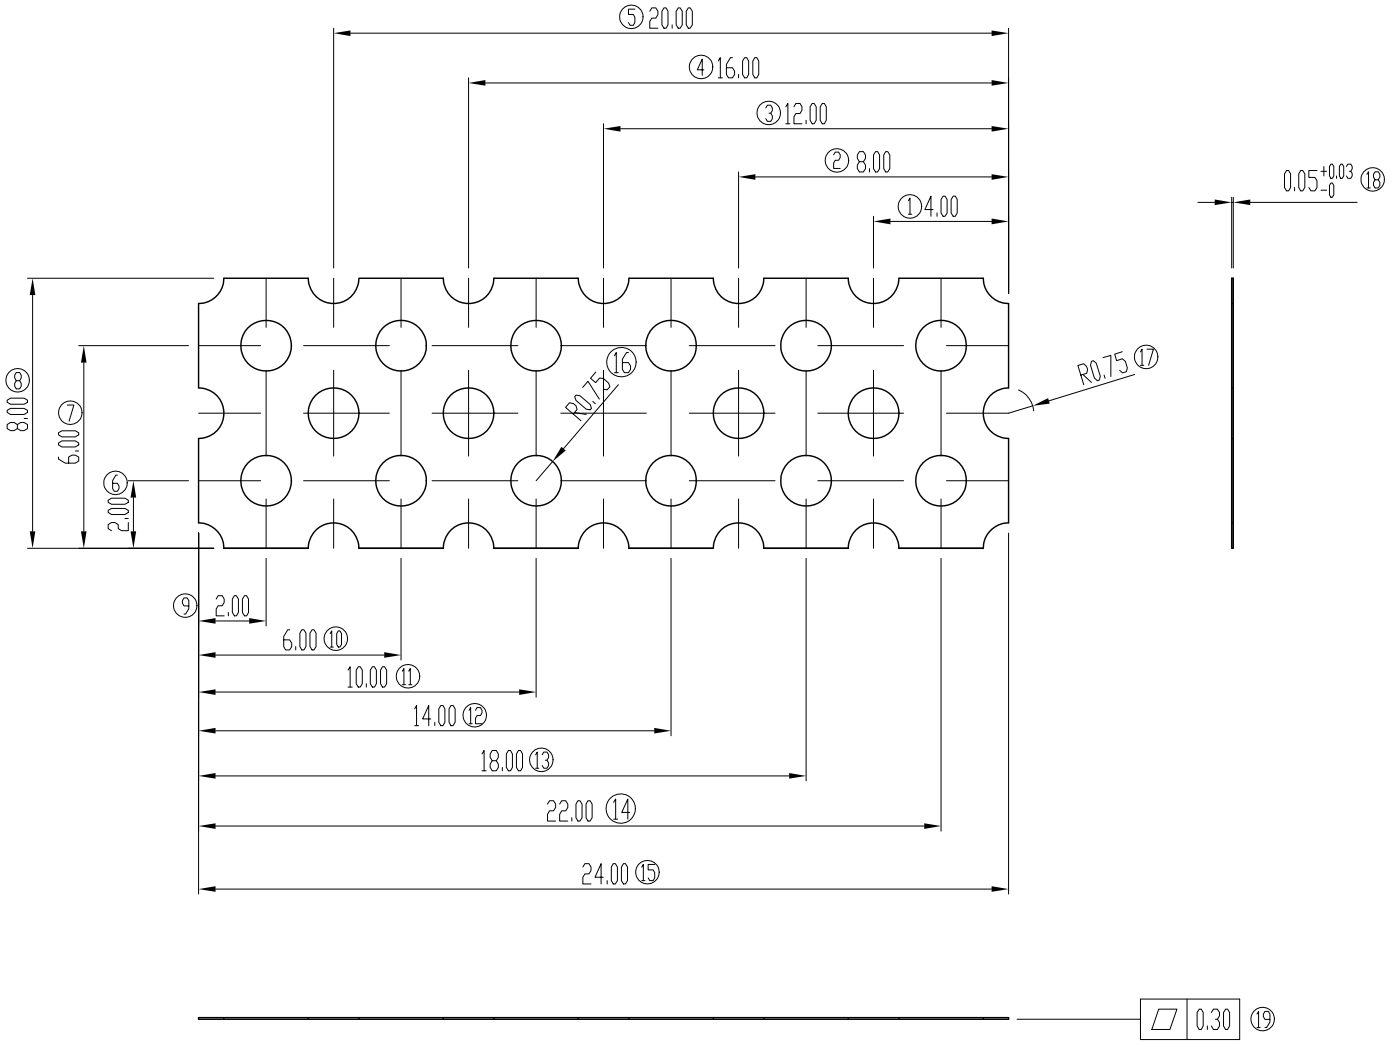

Performance characteristics:

1. Main body part material
   Contact terminal: High conductivity copper, 1.27～7.6μm Ni under plated,
   Outer plating Sn 5.1μm Min.
2. Environment specification
   Working temperature: -55℃～+125℃
3. Packing & storing
   Method of packing: Tape&Reel、outer box
   Storing condition: Temperature of -10℃～+40℃
   below 80% relative humidity
4. Style of installation: SMT
5. To prevent the pollution of the environment product info
   RoHS agreement: In line with the european union RoHS.

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Mark	NO.	File NO.	Signature	Date
DRAW		Change Yu 2015-05-26		
CHK		Alan2015.7.2		
MAN				
STD		Eva2015.7.7		
APP		ZhiJian Jiang2015.7.7		

Net Board L24*W8.0*T0.05

19166004

SL0.1916.015

Projection	Rev.	Weight	Scale
	A0		

All Dimensions in mm | Sheet 1 of 1

SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.