
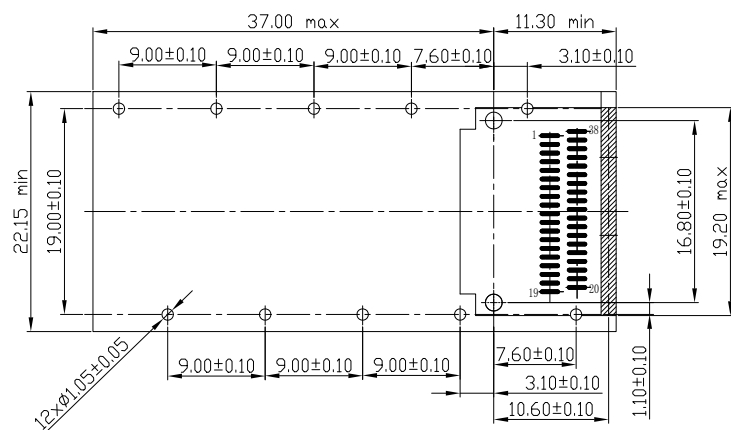
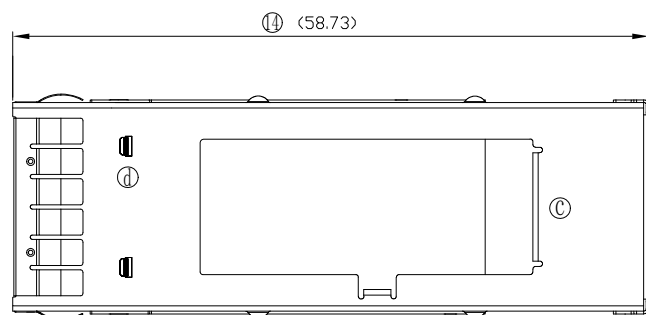



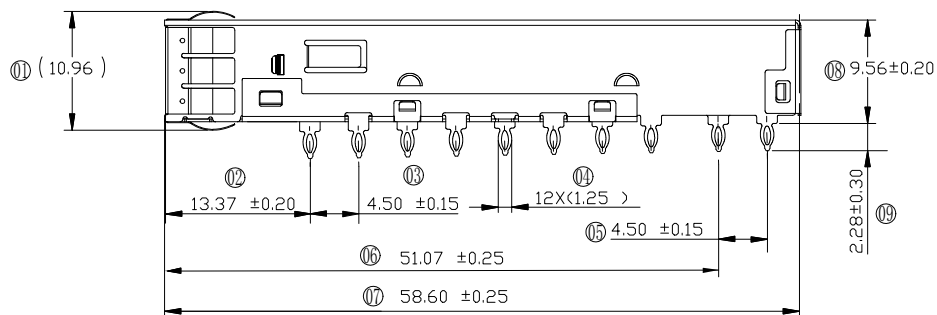

Recommende PCB Layout

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

1.Main body part material

Shell:Copper Alloy, Nickel Plating

Spring:Copper Alloy, Nickel Plating

2.Mechanical requirement

⑤ Press-fit insertion force: 550N max.

④⑤ Press-fit extraction force: 95N min.

3.Environment specification

Working temperature: -20℃~+85℃

Humidity: ≤93% at 40℃

4.Packing & storing

Method of packing: Tray,outer box

Storing condition: Temperature of -10℃~+40℃

below 80% relative humidity

5.Style of installation: Press-fit PCB installation

6.To prevent the pollution of the environment product info

RoHS agreement:In line with the european union RoHS.

④	3	354710	LinZhao	2018.12.03
⑤	1	234393	LinZhao	2017.08.09
⑥	2	SN-00004039	LinZhao	2014.11.06
Mark	NO.	File NO.	Signature	Date
DRAW	Lin Zhao 2013.07.22			
CHK	Tim 2018.12.18			
MAN				
STD	Spring 2018.12.19			
APP	Alan 2018.12.19			

QSFP+ CAGE 1x1 ASSY WITH
EMI SPRING

1873-111-11-H

SL0.1873.001

Projection	Rev.	Weight	
	A4		
All Dimensions in mm		Sheet 1 of 1	
 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			