
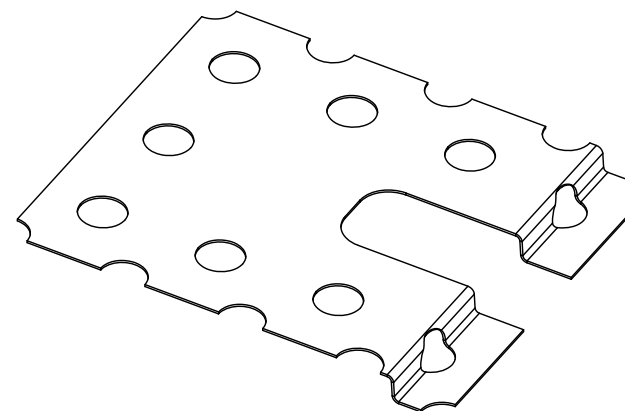
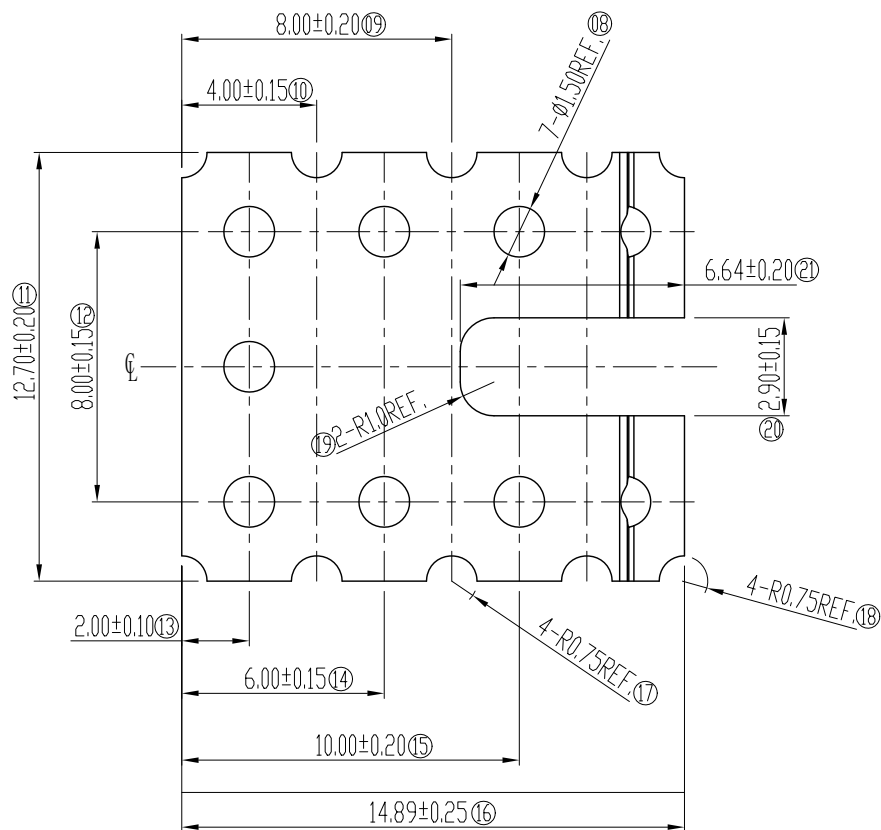


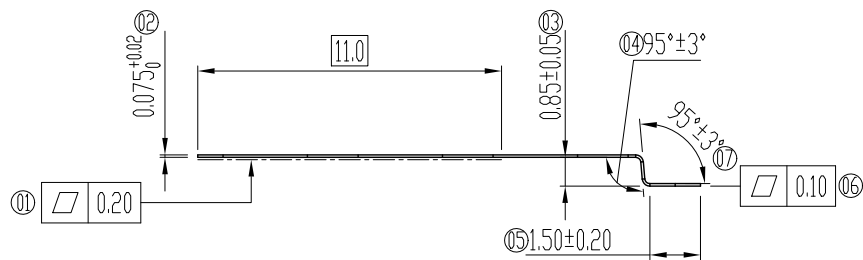

Performance characteristics:

1. Main body part material
Contact terminal: red copper, 1.27~7.6μm Ni under plated,
Outer plating Sn 2.0μm Min.
2. Environment specification
Working temperature: -40℃~+125℃
Resistance to soldering heat: SMT 260℃, 30s (≥3 times)
3. Packing & storing
Method of packing: tape&Reel, outer box
Storing condition: temperature of -10℃~+40℃
below 80% relative humidity
4. Style of installation: SMT
5. To prevent the pollution of the environment product info
RoHS agreement: In line with the European Union RoHS.

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X °	±2°
.XX	±0.25		

Mark	NO.	File NO.	Signature	Date	Net Board L15.5*W12.7*T0.075	SLO. 1916. 049			
DRAW		Change Yu	2019. 10. 27			Projection	Rev.	Weight	Scale
CHK		Tim	2020. 12. 07			AO			
MAN						All Dimensions in mm Sheet 1 of 1			
STD		Juanli lai	2020. 12. 07		19166012	SHINNING SHENZHEN SHINNING ELECTRONIC CO. LTD.			
APP		Alan	2020. 12. 07						