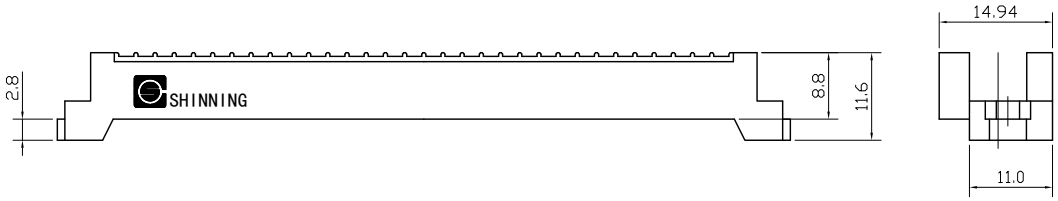

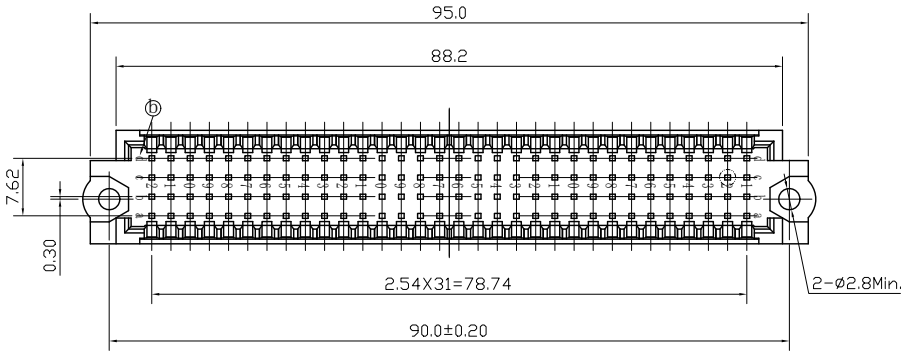

ⓐ PERFORMANCE CHARACTERISTICS:

1. MAIN BODY PART MATERIAL
   INSULATOR: PBT GREY UL94V-0
2. ELECTRICAL REQUIREMENTS
   INSULATION RESISTANCE: ≥1000 MΩ
3. ENVIRONMENT SPECIFICATION
   WORKING TEMPERATURE: -55℃～+125℃
4. APPLICABLE STANDARD: DIN41612
5. PACKING & STORING
   NUMBER OF PACKING: 700PCS/INNEX BOX
   METHOD OF PACKING: INNEX BOX, OUTER BOX
   STORING CONDITION: TEMPERATURE OF -10℃～+40℃
   BELOW 80% RELATIVE HUMIDITY
6. STYLE OF INSTALLATION: RIVET INSTALLATION
7. TO PREVENT THE POLLUTION OF THE ENVIRONMENT PRODUCT INFO
   RoHS AGREEMENT:CONTENT
   TECHNICS:LEAD-FREE

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Mark	NO.	File NO.	Signature	Date
ⓑ	1	411912	jianboluo	2019.9.10
ⓐ	2		LAWRENCE	2007.6.15

DRAW	SamLi
CHK	Lawrence 2019.09.29
MAN	
STD	Juanli lai 2019.09.30
APP	Alan 2019.09.30

SHROUD 4X32PIN

1800-324-00-T

SL0.1800.021

Projection	Rev.	Weight	Scale
	A2		

All Dimensions in mm | Sheet 1 of 1

SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.