



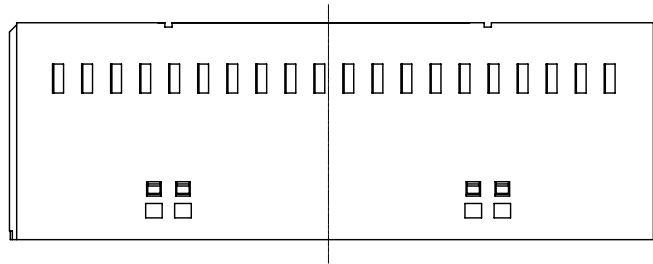

Performance characteristics:

1.Main body part material

Insulator: PBT Gray color UL94V-0

Cover: PBT Red color UL94V-0

2.Electrical requirements:

Current Rating: 1A

Insulation resistance: $\geq 5000 \text{ M}\Omega$

Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

3.Environment specification

Working temperature: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

4.Applicable standard: IEC61076-4-101

5.Packing & storing


Method of packing: box, inner box, outer box

Storing condition: temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$

below 80% relative humidity

6.To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS.

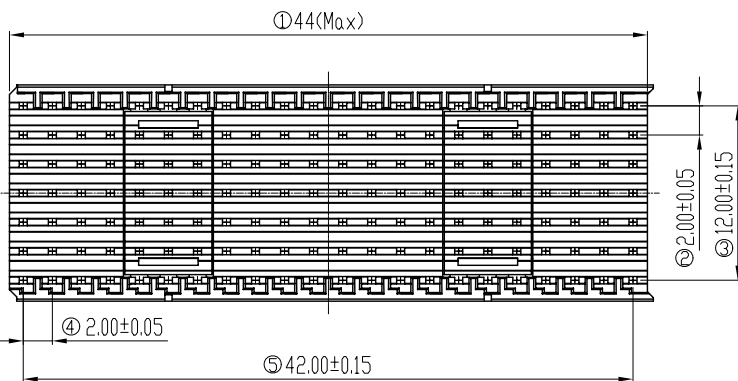

P/N	H
1700-522-81-X	3.9
1700-522-82-X	4.5
1700-522-83-X	6.1

1700 - 522 - 8 X - A				
Series code	Contact pattern code		Spec. code	
	Code	Definition	Code	Definition
	522	5X22	8	Type B
			Spec. code	
			Code	Definition
			1	H=3.9
			2	H=4.5
			4	H=6.1
			Insulator material&color	
			Code	Definition
			A	PBT Gray UL94V-0
			X	Customized

Unless otherwise specified tolerance:

X.	± 0.50	X.°	$\pm 3^{\circ}$
.X	± 0.38	.X°	$\pm 2^{\circ}$
.XX	± 0.25		

					SL0. 1700. 011			
Mark	NO.	File NO.	Signature	Date	HM2mm Shroud Series Type B 5X22			
DRAW			Daisyliu	2013.10.17	Projection	Rev.	Weight	Scale
CHK						A0		
MAN					All Dimensions in mm			
STD					Sheet 1 of 1			
APP					1700-522-8X-A			
					SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			