
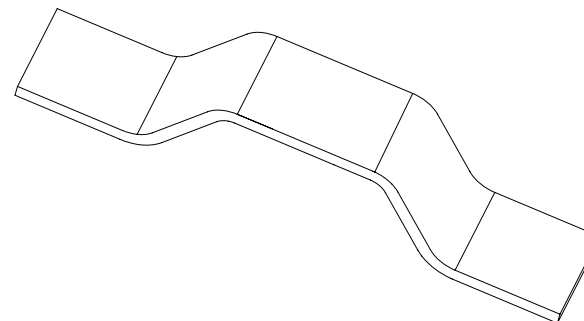



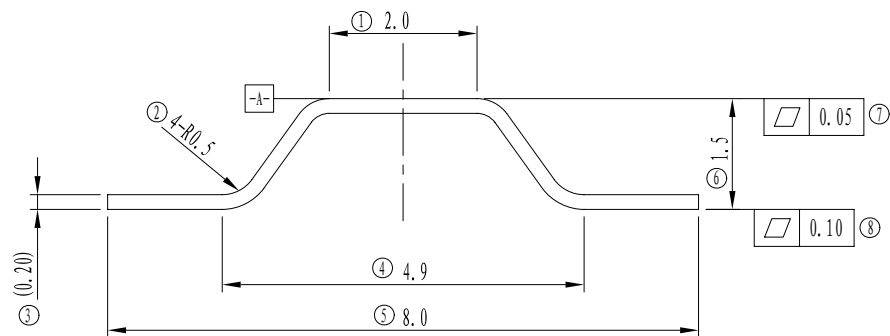

- ④a) Performance characteristics:
- ④c) 1. Main body part material
- Contact terminal: Copper Alloy C7025-TM03 HV: 190~300,
50μ" Ni under plated, outer plating Sn 200μ".
- ④b) 2. Electrical requirements:
- Current rating: 10 A
3. Environment specification
- Working temperature: -40℃~105℃
- Humidity: ≤93% at 40℃
4. Packing & storing
- Method of packing: reel
- Storing condition: temperature of -10℃~+40℃
below 80% relative humidity
5. Style of installation: SMT
6. To prevent the pollution of the environment product info
- RoHS agreement: In line with the European Union RoHS.

Unless otherwise specified tolerance:

X.	± 0.50	X.°	$\pm 3^\circ$
.X	± 0.38	.X°	$\pm 2^\circ$
.XX	± 0.25		

①	1	SN-00001224	An. Cheng	2011.10.20	Jumper Pin	SL0.1916.100			
②	1	SN-00000371	An. Cheng	2011.05.25		Projection	Rev.	Weight	Scale
③	1	SN-00000217	An. Cheng	2011.01.20			A3		
Mark	NO.	File NO.	Signature	Date					
DRAW		An. Cheng 2010.12.10			19163001	All Dimensions in mm		Sheet 1 of 1	
CHK						 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			
MAN									
STD									
APP									