
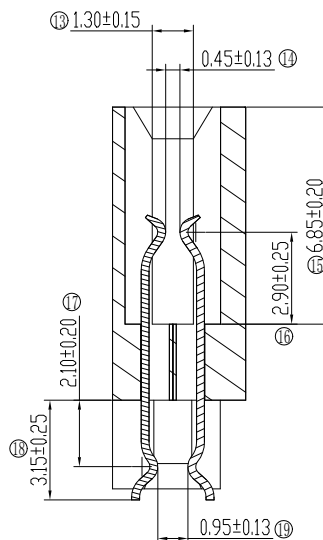
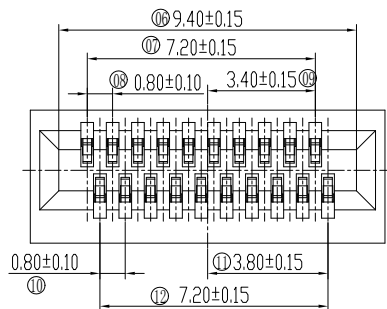
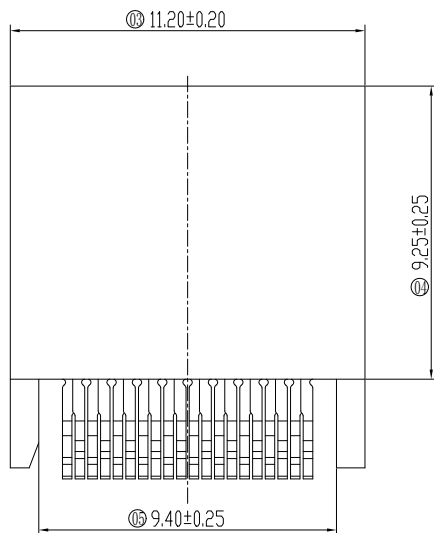


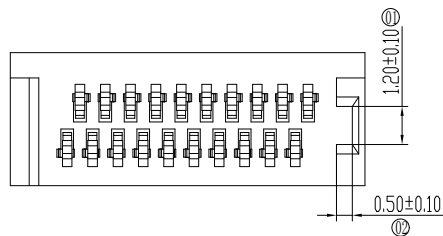

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

1. Main body part material
Insulator: LCP black UL94V-0
Contact terminal: Copper Alloy, 2.54μm Ni under plated,
the contact area plated Au 0.76μm, tail plated Sn
2. Electrical requirements:
Current rating: 0.5A MAX.
Contact resistance: ≤35 mΩ
Insulation resistance: ≥1000 MΩ at DC 500V
Withstanding voltage: 500 V_{r.m.s.}, 1mA, 60s
Data speeds: 10Gbps per channel min.
3. Mechanical requirements
Mechanical life: ≥100 cycles
4. Environment specification
Working temperature: -55°C~+85°C
Humidity: ≤80% at 25°C
Resistance to soldering heat: 260°C±5°C, 10s
5. Storing
Method of packing: tray, outer box
Storing condition: Temperature of -10°C~+40°C
below 80% relative humidity
6. Style of installation: solder PCB installation
7. To prevent the pollution of the environment product info
RoHS agreement: In line with the European Union RoHS.

Mark	NO.	File NO.	Signature	Date	0.8mm Pitch ZSFP+ CONNECTOR	SL0. 1874. 003			
DRAW						Projection	Rev.	Weight	Scale
CHK							A0		
MAN						All Dimensions in mm Sheet 1 of 1			
STD					1874-20J-S8-3	SHINNING SHENZHEN SHINNING ELECTRONIC CO., LTD.			
APP									