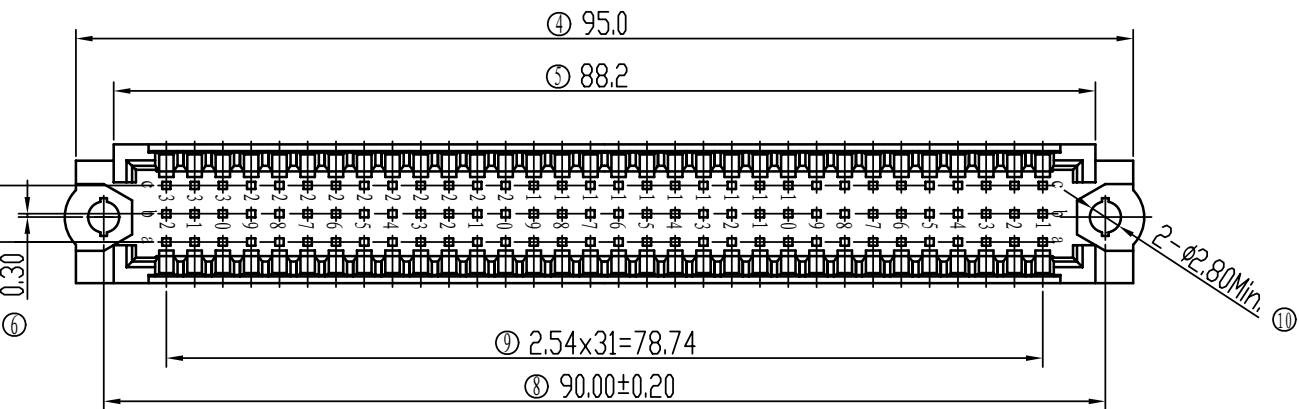
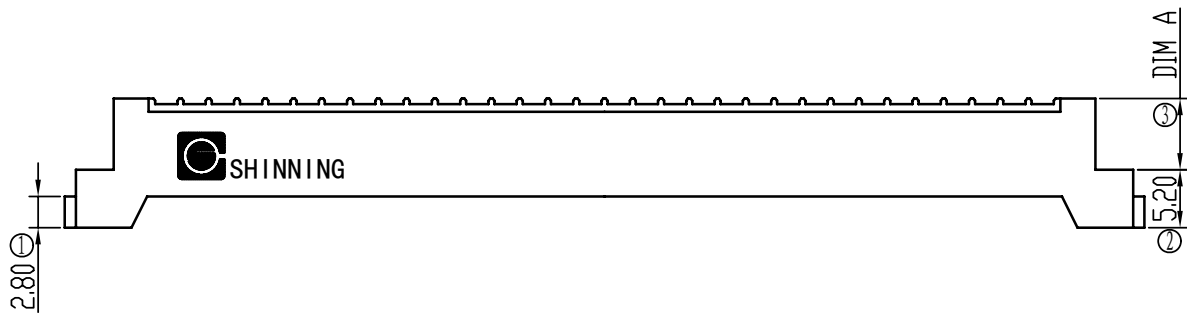


- Performance characteristics:
- 1.Main body part material
Insulator: PBT Grey UL94V-0
 - 2.Electrical requirements:
Insulation resistance: $\geq 1000\text{ M}\Omega$
 - 3.Environment specification
Working temperature: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 - 4.Applicable standard: DIN41612
 - 5.Packing & storing
Method of packing: box, outer box
Storing condition: temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity
 - 6.Style of installation: Rivet installation
 - 7.To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

Table one

Part Number	DIM A
1800-332-00-A	6.40
1800-332-10-A	6.00

Unless otherwise specified tolerance:

X.	± 0.50	X. °	$\pm 3^{\circ}$
.X	± 0.38	.X °	$\pm 2^{\circ}$
.XX	± 0.25		

					Latch 8Pin Shroud/3x32pin	SL0. 1800. 003			
Mark	NO.	File NO.	Signature	Date		Projection	Rev.	Weight	Scale
DRAW			Lawrence	2013. 09. 27			A0		
CHK						All Dimensions in mm			
MAN					1800-332-X0-A	Sheet 1 of 1			
STD						SHINNING SHENZHEN SHINNING ELECTRONIC CO. LTD.			
APP									