
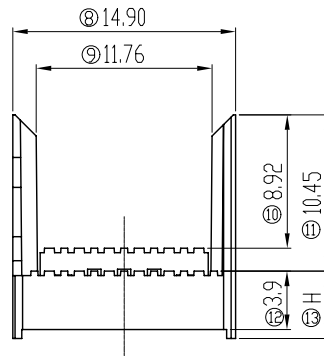


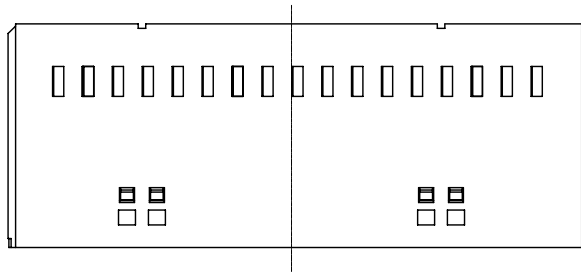

Performance characteristics:

1. Main body part material

Insulator: PBT Gray color UL94V-0

Cover: PBT Red color UL94V-0

2. Electrical requirements:

Current Rating: 1A

Insulation resistance: $>5000\text{ M}\Omega$

Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

3. Environment specification

Working temperature: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

4. Applicable standard: IEC61076-4-101

5. Packing & storing



Method of packing: box, inner box, outer box

Storing condition: temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$

below 80% relative humidity

6. To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS.

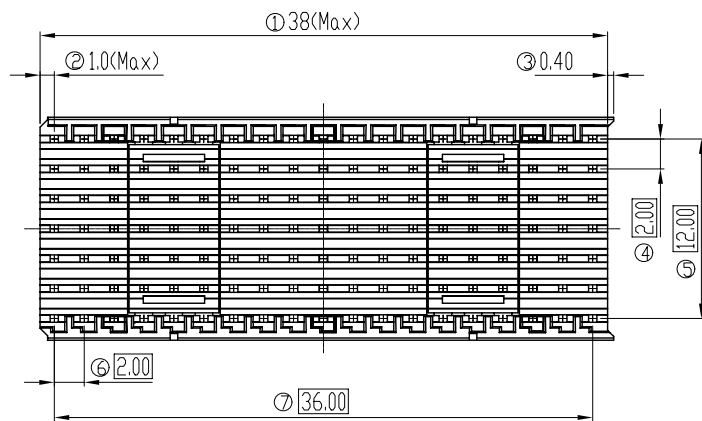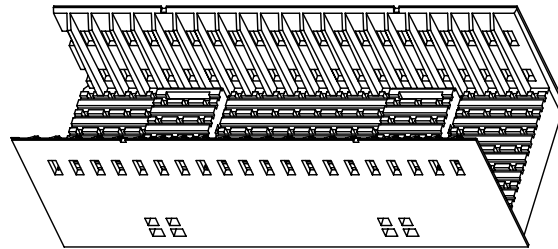

P/N	H
1700-519-81-X	3.9
1700-519-82-X	4.5
1700-519-73-X	6.1

Series code		Contact pattern code		Spec. code		Spec. code		Insulator material&color	
Code	Definition	Code	Definition	Code	Definition	Code	Definition	Code	Definition
519	5X19	8	Type B	1	H=3.9	A	PBT Gray UL94V-0	A	PBT Gray UL94V-0
				2	H=4.5	X	Customized	X	Customized
				4	H=6.1				

Unless otherwise specified tolerance:

X.	± 0.50	X.°	$\pm 3^{\circ}$
.X	± 0.38	.X°	$\pm 2^{\circ}$
.XX	± 0.25		

					HM2mm Shroud Series Type B 5X19	SL0. 1700. 009			
						Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A0		
DRAW	Daisyliu 2013.10.17								
CHK									
MAN									
STD					1700-519-8X-A	All Dimensions in mm Sheet 1 of 1			
APP						 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			