

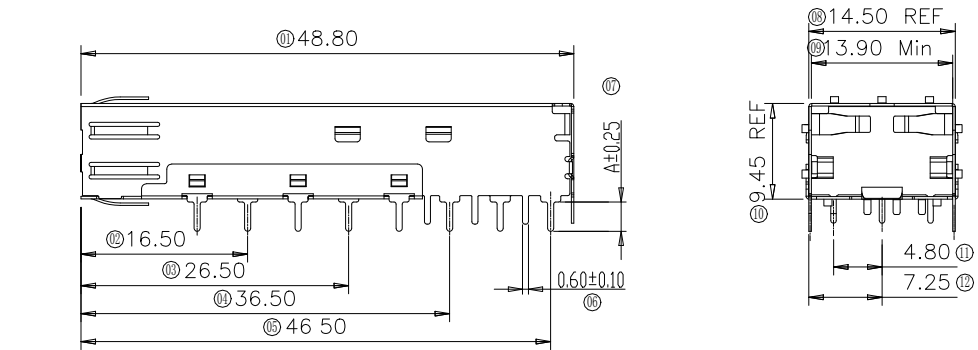


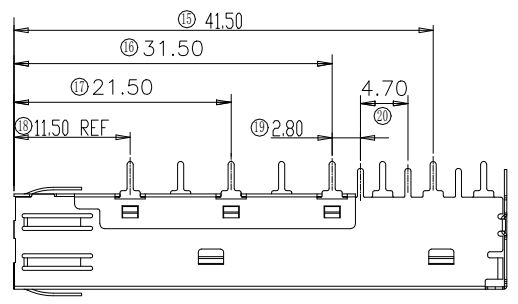

Size table:

Part number	DIM A
1875-111-01-X	3.0
1875-112-01-X	1.8

- Performance characteristics:
- 1.Main body part material
SHELL:See part number rule
 - 2.Environment specification
Working temperature: -55℃~+85℃
Humidity: ≤80% at 25℃
 - 3.Storing
Method of packing: tray, outer box
Storing condition: Temperature of -10℃~+40℃
below 80% relative humidity
 - 4.Style of installation: Solder pcb installation
 - 5.To prevent the pollution of the environment product info
RoHS agreement:In line with the european union RoHS.

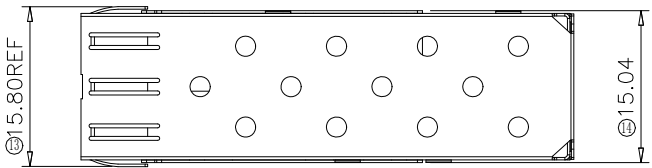



1875 - 11 X - 0 1 - X

Series code	Terminal number	Spec. code		Spec. code		Spec. code		Cage material & Plating	
Code	Definition	Code	Definition	Code	Definition	Code	Definition	Code	Definition
11	1X1	1	Solder pcb A=3.0	0	standard	1	With heat-hole	H	Copper Alloy,plating Nickel
		2	Solder pcb A=1.8			X	Customized	X	Customized
		X	Customized						

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Mark	NO.	File NO.	Signature	Date	SFP 1x1 Cage Solder pcb type	SL0. 1875. 001			
DRAW	CHK	MAN	STD	APP		Projection	Rev.	Weight	Scale
							B0		
						All Dimensions in mm Sheet 1 of 2			
						SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			

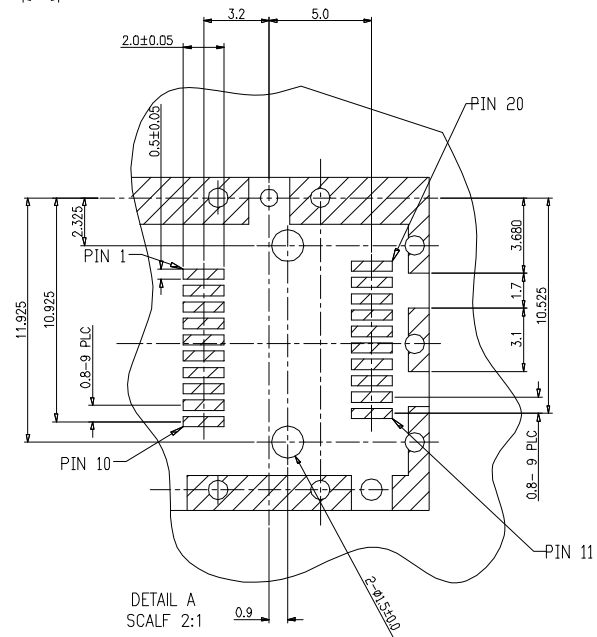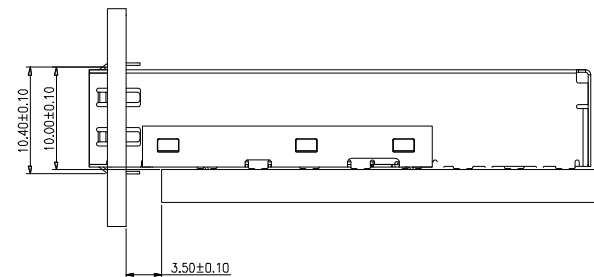

DETAIL A
SCALF 2:1

Mark	NO.	File NO.	Signature	Date
DRAW		Zhaolin	2021.05.24	
CHK		Tim	2021.06.15	
MAN				
STD		Juanli lai	2021.06.16	
APP		Alan	2021.06.16	

1875-11X-01-X

Projection	Rev.	Weight	Scale
	BO		

 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.