

Performance characteristics:

1.Main body part material

Insulator: PBT Grey UL94V-0

2.Environment specification

Working temperature: -55℃ ~+125℃

3.Packing & storing





Method of packing: box, inner box, outer box

Storing condition: temperature of -10℃ ~+40℃

below 80% relative humidity

4.To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS.

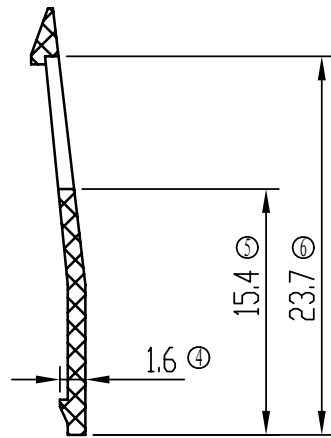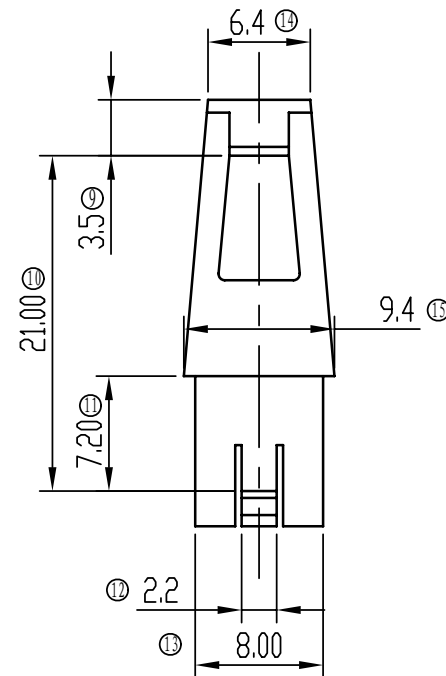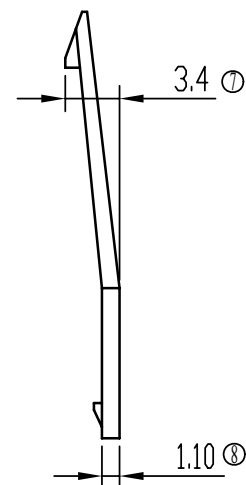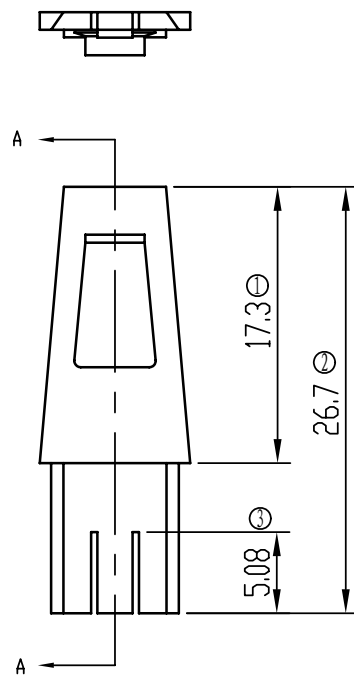

SECTION A-A

Unless otherwise specified tolerance:

X.	± 0.50	X. °	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

Mark	NO.	File NO.	Signature	Date	DIN41612 CONN.No Latch/3Pin	SL0. 1801. 003			
DRAW		Lawrence	2013.09.27			Projection	Rev.	Weight	Scale
CHK							A0		
MAN						All Dimensions in mm Sheet 1 of 1			
STD					1801-030-00-A	SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			
APP									