
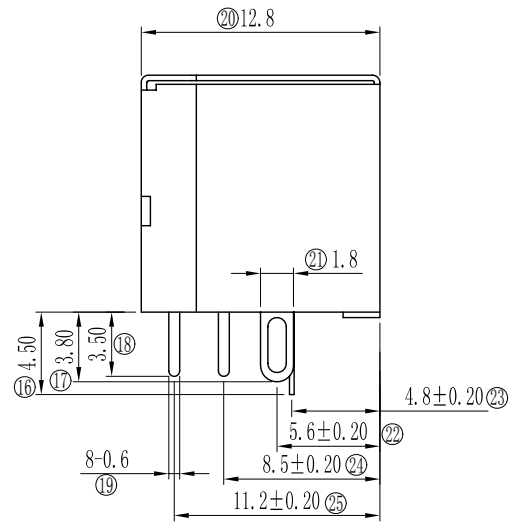
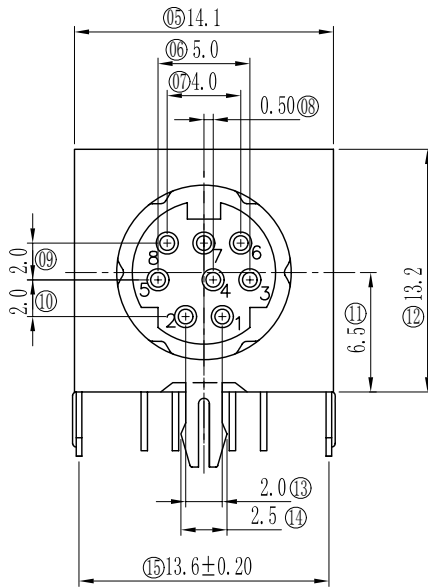
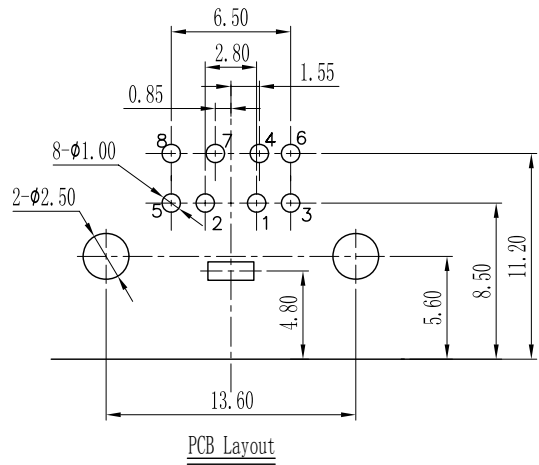


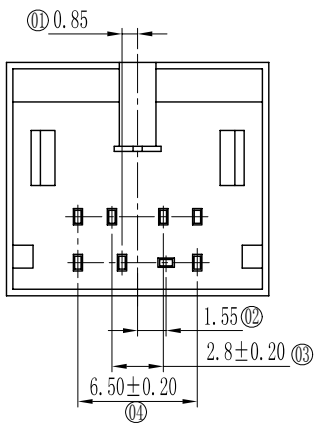

- Performance characteristics:
- 1.Main body part material
Insulator: PBT Black UL94V-0
Contact terminal: Brass, 1.27~2μm Ni under plated, outer plating Sn 3μm Min
Shield: Brass; Plating: Ni
 - 2.Electrical requirements:
Current rating: 1 A
Voltage rating: 250 V
Contact resistance: ≤3 mΩ
Insulation resistance: ≥1000 MΩ
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s
 - 3.Environment specification
Working temperature: -25℃~+85℃
Humidity: ≤93% at 40℃
 - 4.Packing & storing
Method of packing: Tray, outer box
Storing condition: Temperature of -10℃~+40℃ below 80% relative humidity
 - 5.Style of installation: Solder PCB installation
 - 6.To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

					Mini Din 8Pin	SL0.1631.001				
Mark	NO.	File NO.	Signature	Date		Projection	Rev.	Weight	Scale	
DRAW	An.Cheng 2013.12.02						A0			
CHK					1631-181-1B-1	All Dimensions in mm		Sheet 1 of 1		
MAN										
STD										
APP						 SHINNING		SHENZHEN SHINNING ELECTRONIC CO.,LTD.		