

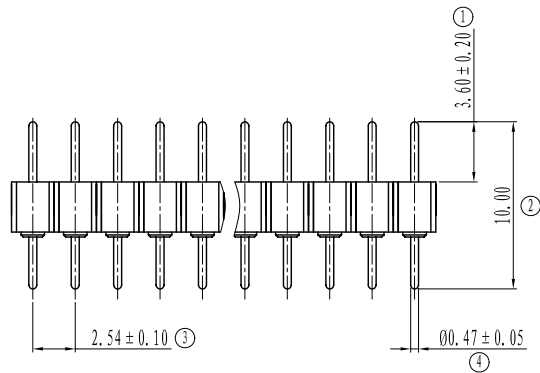



Double row Single row

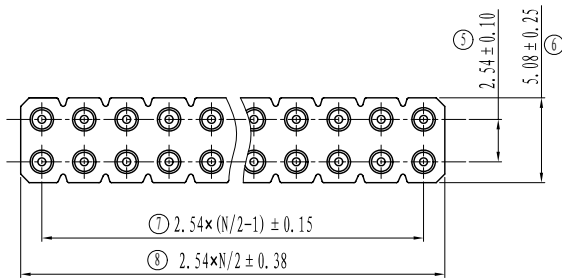


Double row

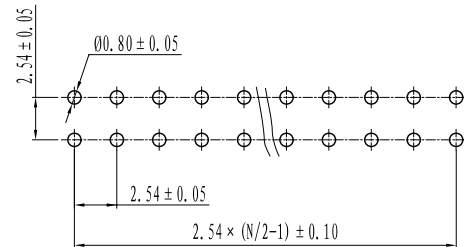

PCB LAYOUT

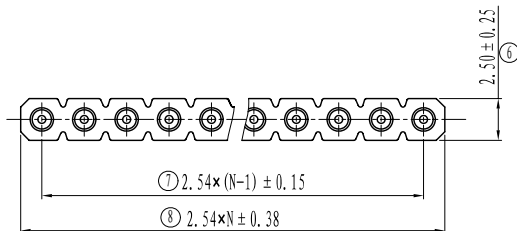

Single row
N= Number of contacts

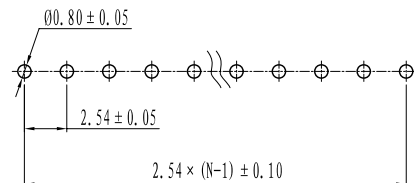

PCB LAYOUT

UNLESS OTHERWISE PECIFIED TOLERANCE

X.	±0.50	X. °	±3°
.X	±0.38	.X °	±2°
.XX	±0.25		

PERFORMANCE CHARACTERISTICS:

1.MAIN BODY PART MATERIAL

INSULATOR: SEE SPEC LIST

CONTACT TERMINAL: BRASS,PLATING SEE SPEC LIST

2.ELECTRICAL REQUIREMENTS

CURRENT RATING: 3 A

CONTACT RESISTANCE: ≤20 mΩ

INSULATION RESISTANCE: ≥1000 MΩ

WITHSTANDING VOLTAGE: 1000 Vr.m.s, 1mA, 60s

3.ENVIRONMENT SPECIFICATION

WORKING TEMPERATURE: -55℃ ~+125℃

HUMIDITY: ≤93% at 40℃

RESISTANCE TO SOLDERING HEAT: 260℃±5℃, 10s

4.PACKING & STORING

METHOD OF PACKING: PLASTIC BAG, INNER BOX, OUTER BOX

STORING CONDITION: TEMPERATURE OF -10℃ ~+40℃
BELOW 80% RELATIVE HUMIDITY

5.STYLE OF INSTALLATION: SOLDER PCB INSTALLATION

6.TO PREVENT THE POLLUTION OF THE ENVIRONMENT PRODUCT INFO

RoHS AGREEMENT: EXEMPT (COMPLIANCE WITH THE EXEMPT
DISCIPLINE OF EUROPEAN Union)

1127 - XX X - X X - X

Series No.		Terminal number		Spec code		Spec code		Plating code			Insulator material & color	
01~40		Nr.of contacts/row		Code	Definition	Code	Definition	Code	Definition		Code	Definition
				1	Single row	1	dia. 0.47mm	1	Contact area	Tail	2	PPS BLACK UL94V-0
				2	Double row			2	gold flash		X	Customized
								2	Au 0.25 μm			

					Pin connectors Solder tail	SL0.1127.103			
						PROJECTION	REV.	WEIGHT	SCALE
MARK	NO.	FILE NO.	SIGNATURE	DATE			A0		
DRAW	Lin Zhao 2013.09.30								
CHK					1127-XXX-1X-X	All Dimensions in mm			Sheet 1 of 1
MAN						 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			
STD									
APP									