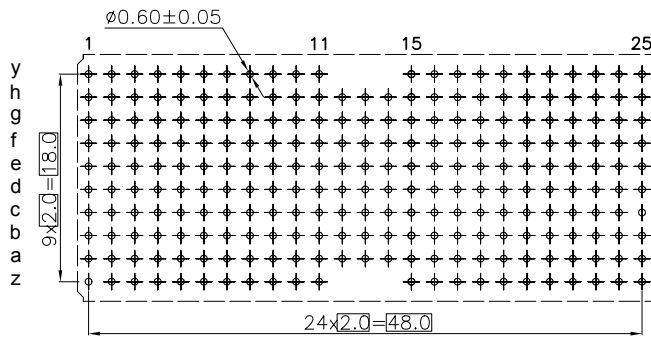
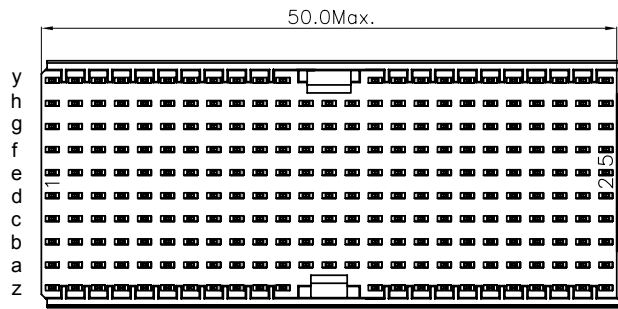
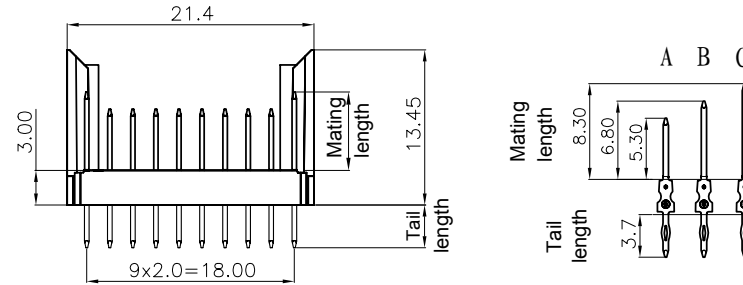


[illegible]

UNLESS OTHERWISE SPECIFIED
TOLERANCE

X.	± 0.50	X. °	$\pm 3^\circ$
. X	± 0.38	. X°	$\pm 2^\circ$
. XX	± 0.25		

1. MAIN BODY PART MATERIAL
INSULATOR: PBT Gray UL94V-0
CONTACT TERMINAL: Phosphor Bronze

2. ELECTRICAL REQUIREMENTS
CURRENT RATING: 1 A (70°C)
1.5 A (20°C)
CONTACT RESISTANCE: $\leq 20 \text{ m}\Omega$
INSULATION RESISTANCE: $\geq 10000 \text{ M}\Omega$
WITHSTANDING VOLTAGE: 750 V_{r.m.s.}, 1mA, 60s

WORKING TEMPERATURE: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

5. PACKING & STORING

NUMBER OF PACKING: 48PCS/BOX
METHOD OF PACKING: BOX, INNER BOX, OUTER BOX
STORING CONDITION: TEMPERATURE OF $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
BELOW 80% RELATIVE HUMIDITY

6. STYLE OF INSTALLATION: PRESS-FIT PCB INSTALLATION

7. TO PREVENT THE POLLUTION OF THE ENVIRONMENT

PRODUCT INFO

RoHS AGREEMENT: CONTENT

TECHNICS: LEAD-FREE

1753-XXX-XX-X

— Especial code: 0 None Specifies

—Plating Code:

Code	Definition
7	Contact area: $0.38 \mu\text{m Au}$; Tail area: $3 \sim 5 \mu\text{m Sn}$
8	Contact area: $0.76 \mu\text{m Au}$; Tail area: $3 \sim 5 \mu\text{m Sn}$

—Spec. code:

Code	Definition
3	press fit/without peg/shielded
4	press fit/without peg/non-shielded

—Contact pattern code: see attached table

—Series Code: 2mm Straight Male DE type

					HM2mm Straight Male Press fit Connector Type DE	SL0.1753.001			
						PROJECTION	REV.	WEIGHT	SCALE
MARK	NO.	FILE NO.	SIGNATURE	DATE			A0		
DRAW		Lisjia	2007.5.6				SHEET		1 OF 1
CHK		Lawrence Liu	2007.5.8		 SHENZHEN SHINING ELECTRONICS CO.,LTD.				
MAN		Lawrence Liu	2007.5.8						
STD		Helen Wang	2007.5.8						
APP		Jiang	2007.5.8		1753-XXX-XX-X				