
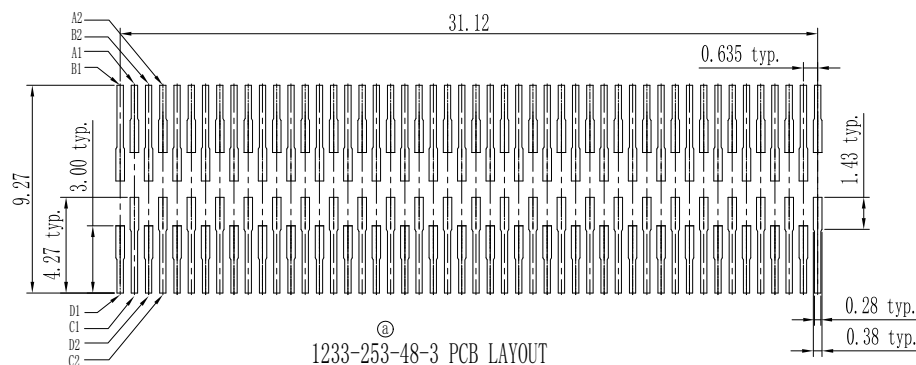
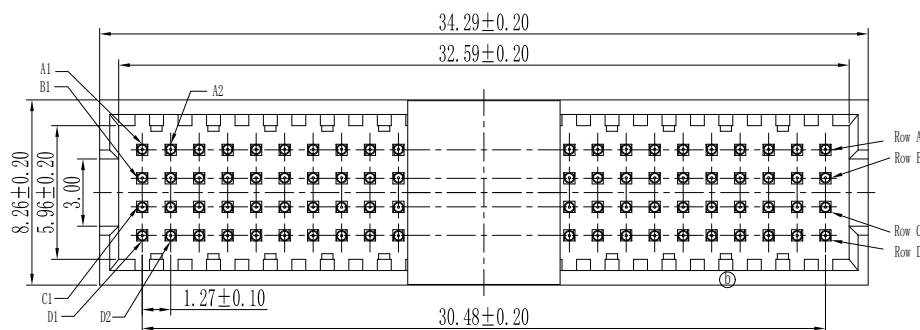


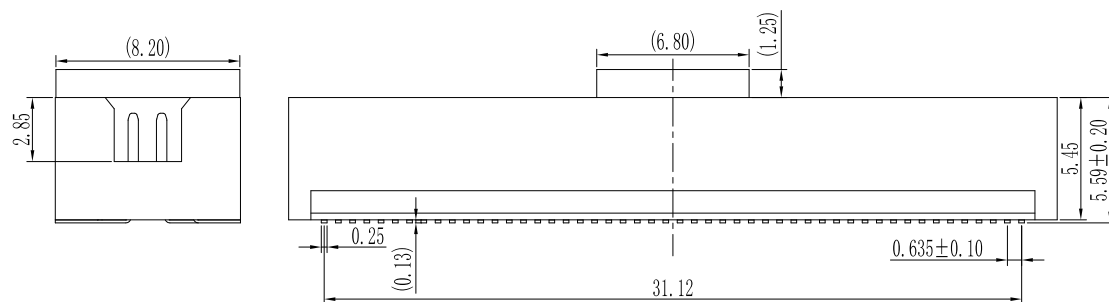

1233-253-48-3 PCB LAYOUT

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

1.Main body part material

Insulator: LCP black UL94V-0

③ Contact terminal: Copper alloy, 1.27μm min. Ni under plated,

Contact area plating Au 0.76μm, Tail plating Au 0.08~0.2μm

2.Electrical requirements:

Current rating: 1.0 A

Contact resistance: ≤30 mΩ

Insulation resistance: ≥1000 MΩ

Withstanding voltage: 500V AC, 1mA, 60s

3.Mechanical requirements

Insertion force: ≤3.0N/pin

Extraction force: ≥0.2N/pin

Mechanical life: 100 cycles

4.Environment specification

Working temperature: -55℃~+125℃

Humidity: ≤93% at 40℃

Resistance to soldering heat: 260℃, 30s

5.Packing & storing

Method of packing: Tape&Reel, outer box

Storing condition: temperature of -10℃~+55℃

below 80% relative humidity

6.Style of installation: SMT

7.To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS.

①	1	392474	ZhaoLin	2019.06.27
②	2	350818	ZhaoLin	2018.11.19
Mark	NO.	File NO.	Signature	Date
DRAW			Tim Lv	2018.07.16
CHK			Tim	2019.07.03
MAN			Alan	2019.07.05
STD			Alan	2019.07.05
APP			Alan	2019.07.05

1.27mm Pitch Box Header
SMT 4X25Pin

1233-253-48-3

SLO. 1233.003

Projection	Rev.	Weight	Scale
	A2		

All Dimensions in mm Sheet 1 of 1

SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.