



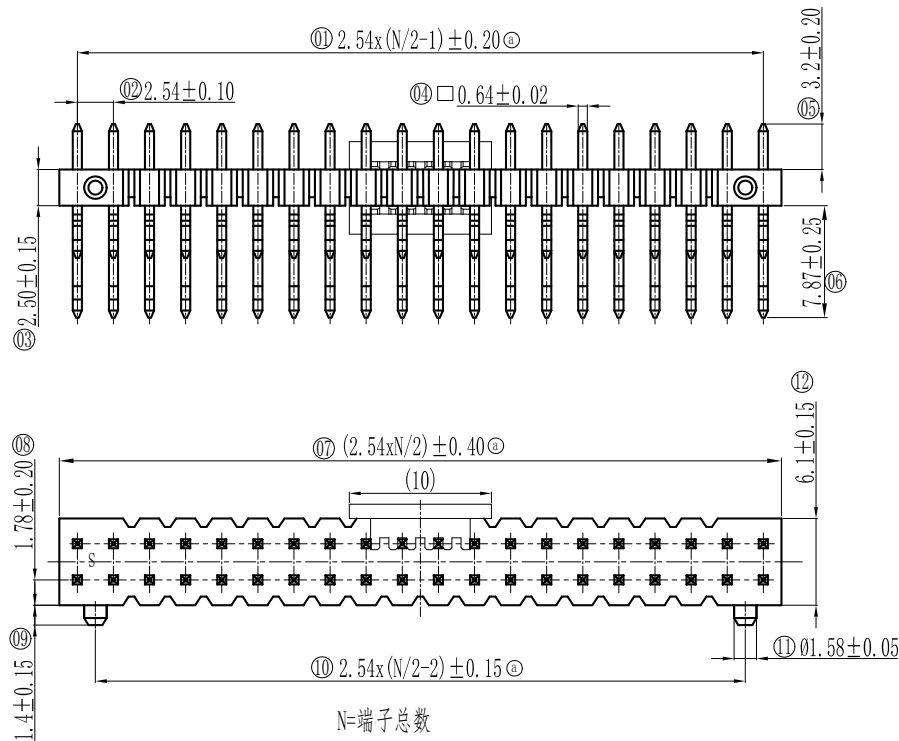

N=端子总数

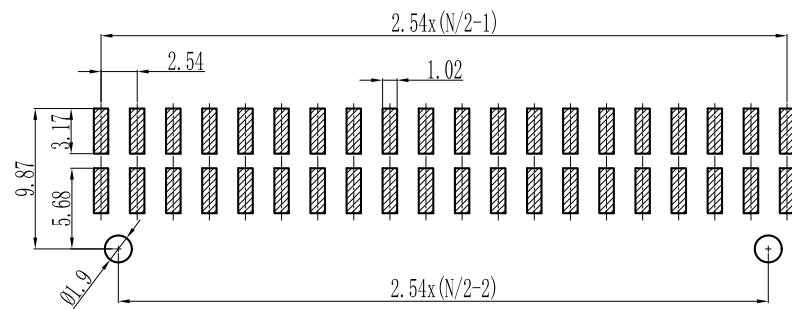

PCB LAYOUT
TOLERANCE: ±0.05

Performance characteristics:

1. Main body part material
Insulator: LCP Black UL94V-0
Contact terminal: brass, 1.27 μm Ni under plated, outer plating gold flash
2. Electrical requirements:
Current rating: 3 A
Voltage rating: 250V
Contact resistance: ≤20 mΩ
Insulation resistance: ≥5000 MΩ
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s
3. Mechanical requirements
Retention: ≥3N/pin
4. Environment specification
Working temperature: -40℃~+105℃
Humidity: ≤93% at 40℃
Resistance to soldering heat: 260℃+0/-5, 30s
5. Packing & storing
Method of packing: Tape & Reel, outer box
Storing condition: Temperature of -10℃~+40℃
below 80% relative humidity
6. Style of installation: SMT
7. To prevent the pollution of the environment product info
RoHS agreement: In line with the European Union RoHS.

Series code		Terminal number	Spec code			Plating code		Insulator material & color	
1208 - XX		4~80	S - 8 X - 3			1		3	
Code		Definition	Code		Definition	Code		Code	Definition
S		13.57 3.20 7.87	8		Double row horizontal SMT With stake, Reel packing	1		3	LCP black UL94V-0

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

2.54mm pitch double row horizontal SMT 2x20Pin				SL0.1208.032			
Mark		NO.		Rev.		Weight	
DRAW		File NO.		A1		Scale	
CHK		Signature		All Dimensions in mm		Sheet 1 of 1	
MAN		Date		1208-XXS-8X-3		SHINNING SHENZHEN SHINNING ELECTRONIC CO., LTD.	
STD		xyliu 2022.11.16					
APP		Alan 2022.11.16					