
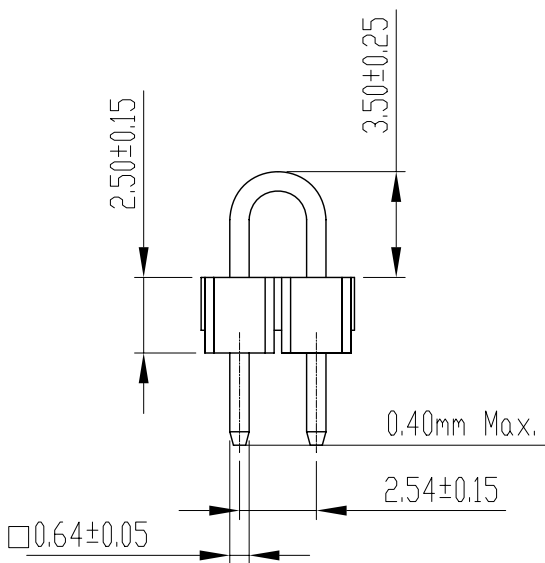



2°MAX SWAY
(ANY DIRECTION)

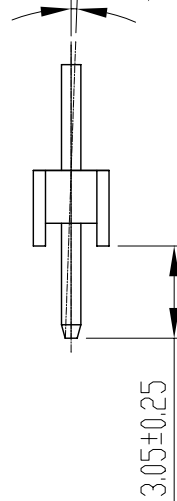

RECOMMENDED PCB LAYOUT (TOP SIDE)
(PCB BOARD TOLERANCE ± 0.05)

Performance characteristics:

1. Main body part material

Insulator: PPS Black UL94V-0

Contact terminal: Brass, Gold flash over 1.27 ~ 3 μ m Ni.

2. Electrical requirements:

Current rating: 3 A

Contact resistance: ≤ 20 m Ω

Insulation resistance: ≥ 1000 M Ω

Withstanding voltage: AC 500 Vr.m.s, 1mA, 60s

3. Environment specification

Working temperature: -40°C ~ 105°C

4. Packing & storing

Method of packing: plastic bag

Storing condition: temperature of -10°C ~ +40°C
below 80% relative humidity

5. Style of installation: solder pcb installation

6. To prevent the pollution of the environment product info

RoHS agreement: In line with the European Union RoHS.

Unless otherwise specified tolerance:

X.	± 0.50	X. °	$\pm 3^\circ$
.X	± 0.38	.X °	$\pm 2^\circ$
.XX	± 0.25		

					2.54mm pitch U-sharpe pin header	SL0. 1241. 004			
						Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A0		
DRAW	Tim 2009.11.10				1241-024-11-2		A0		
CHK									
MAN						Sheet 1	1 of 1		
STD						 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			
APP									