
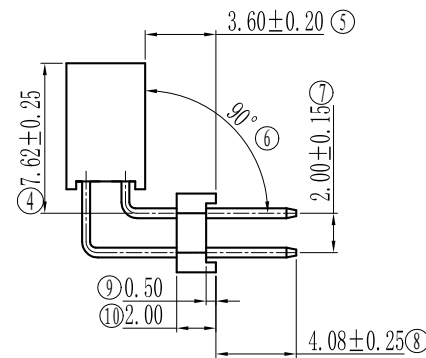
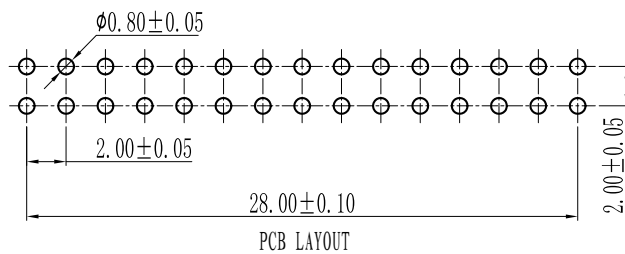
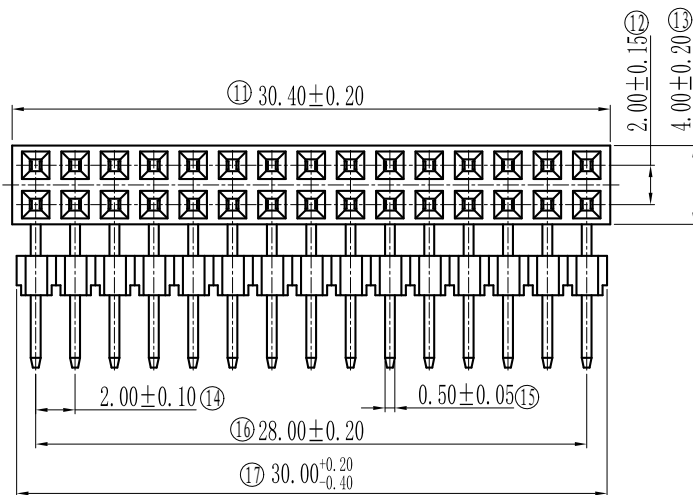


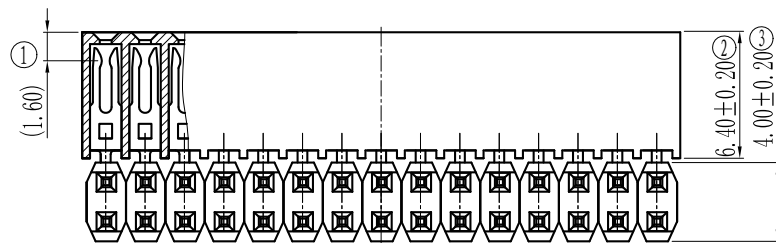

Performance characteristics:

- 1.Main body part material
Insulator:LCP balck UL94V-0
Contact terminal: phosphor bronze,1.27μm Ni under plated,
Contact area plating Au0.76μm, Tail plating matte Sn
- 2.Electrical requirements:
Current rating: 2 A
Contact resistance: ≤20 mΩ
Insulation resistance: ≥1000 MΩ
Withstanding voltage: 500 Vr.m.s, 1ma, 60s
- 3.Mechanical requirements
Insertion force: ≤2.0 N/pin
Extraction force: ≥0.3 N/pin
① Retention:≥5.0 N/pin
② Durability:100 Cycles Min.
- 4.Environment specification
Working temperature: -55℃~+125℃
Humidity: ≤93% at 40℃
Resistance to soldering heat: 260℃±5℃, 10s
- 5.Packing & storing
Method of packing: tube, outer box
Storing condition: temperature of -10℃~+40℃
below 80% relative humidity
- 6.Style of installation: solder pcb installation
- 7.To prevent the pollution of the environment product info
RoHS agreement:In line with the european union RoHS

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

①	2	89492	Tim Lv	2016.01.24
Mark	NO.	File NO.	Signature	Date
DRAW			Lin Zhao	2015.06.15
CHK				
MAN				
STD				
APP				

2.00mm receptacle double
row right angle socket

1293-303-A8-3

SL0.1293.002

Projection	Rev.	Weight	Scale
	A1		
All Dimensions in mm		Sheet 1 of 1	
SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			