

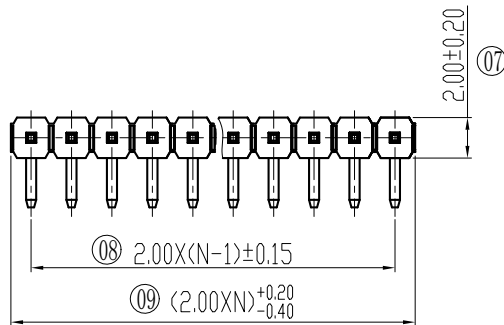



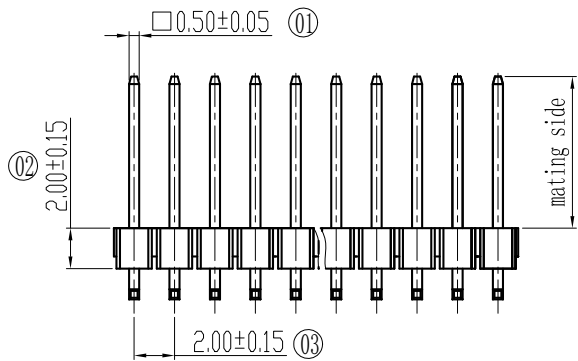

N=Number of contacts

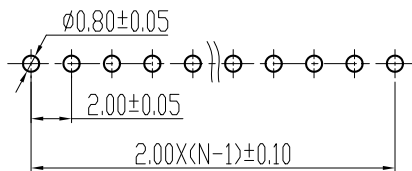

PCB LAYOUT

The 7th spec code definition:

Code	Definition		
	A	B	C
1	2.00	3.00	1.00
2	3.20	3.20	1.00
3	3.00	3.00	1.00
4	2.20	2.20	1.20
5	1.80	2.20	1.20
6	1.60	2.20	1.20
7	2.80	4.00	1.00
8	5.80	3.00	1.00
9	2.50	3.00	1.00
A	2.20	3.50	1.00
B	2.80	2.80	1.00
C	2.75	3.50	2.10
D	1.20	2.10	1.00
E	3.50	2.50	1.00
X	Customized		

Performance characteristics:

1. Main body part material

Insulator: See part number rule

Contact terminal: Brass, 1.27 μm Ni under plated, outer plating see part number rule

2. Electrical requirements:

Current rating: 3 A

Contact resistance: ≤20 mΩ

Insulation resistance: ≥5000 MΩ

Withstanding voltage: 1000 Vr.m.s, 1ma, 60s

3. Mechanical requirements

Retention: ≥4.5 N/pin

4. Environment specification

Working temperature: -55℃~+125℃

Humidity: ≤93% at 40℃

Resistance to soldering heat: 245℃±5℃ (for PBT insulator)
260℃±5℃ (for LCP insulator)

5. Packing & storing

Method of packing: Plastic bag, paper box, little outer box


Storing condition: Temperature of -10℃~+40℃

below 80% relative humidity

6. Style of installation: Solder pcb installation

7. To prevent the pollution of the environment product info

RoHS agreement: In line with the European Union RoHS.

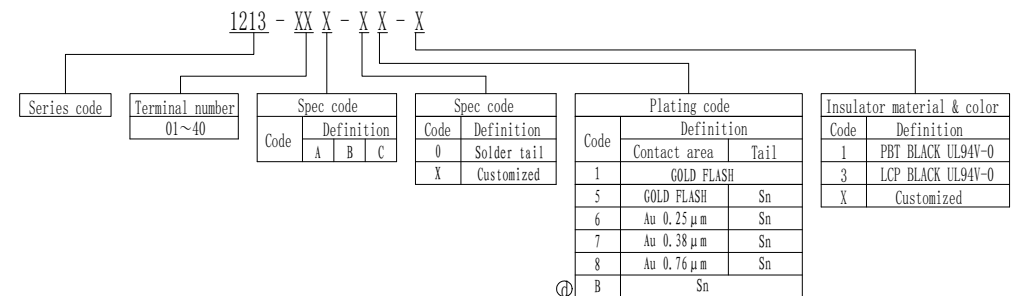

①	1	256115	Tim Lv	2017.11.03	2.00mm pitch single row terminal strips right angle	SL0. 1213. 100
②	1	26615	Tim Lv	2015.05.20		
③	3	SN-00004028	Tim Lv	2014.10.20		
Mark	NO.	File NO.	Signature	Date		
DRAW			Kevin	2013.05.21	1213-XXX-XX-X	Projection Rev. Weight Scale
CHK			Lawrence	2017.11.3		
MAN			Spring	2017.11.14		
STD			Alan	2017.11.14		
APP						All Dimensions in mm Sheet 1 of 1 SHINNING SHENZHEN SHINNING ELECTRONIC CO. LTD.

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		