
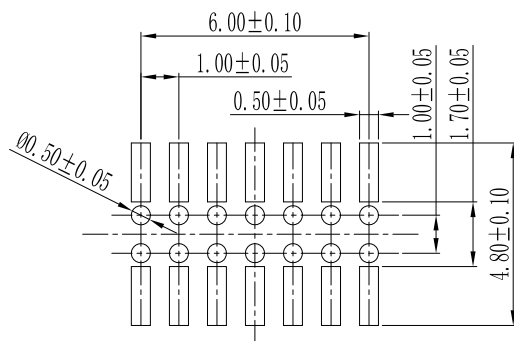
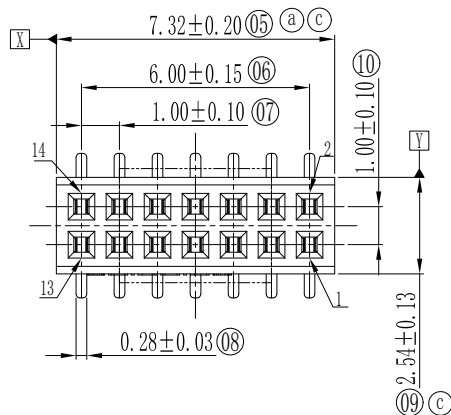
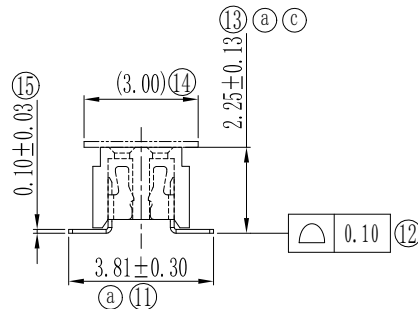


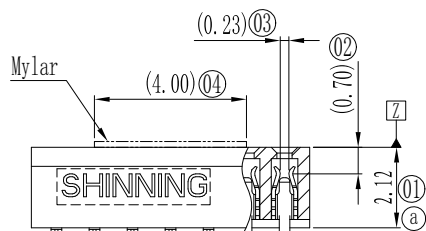

Recommended PCB Layout

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

- 1.Main body part material
Insulator: PA6T Black,UL 94V-0
⑤ Contact terminal: Phosphor bronze,1.27 μm Min. Ni under plated,
Contact area plating Au 0.25 μm Min. ,
tail plating Au 0.08~0.2 μm
2. Electrical requirements:
Current rating: 1.5 A
Contact resistance: ≤20mΩ
Insulation resistance: ≥1000 MΩ
Withstanding voltage: 500 Vr.m.s, 1mA, 60s
- 3.Mechanical requirements
Insertion force: ≤1.2N/pin
Extraction force: ≥0.2 N/pin
Retention force : ≥1.5 N/pin
- 4.Environment specification
Working temperature: -40℃~105℃
Humidity: ≤93% at 40℃
Resistance to soldering heat: 260℃, 30s(SMT)
- 5.Packing
Method of packing: Tape & Reel, outer box
- 6.Style of installation: SMT
- 7.To prevent the pollution of the environment product info
RoHS agreement:In line with the European Union RoHS.

④	1	410016	Zhao Lin	2019.08.30	1.00mm pitch double row SMT socket 2x7pin (Customer:HUAWEI)	SL0.1282.007			
③	2	364002	Zhao Lin	2019.01.21		Projection	Rev.	Weight	Scale
②	1	342283	Zhao Lin	2018.11.14			A4		1:1
Mark	NO.	File NO.	Signature	Date	1282-072-62-P	All Dimensions in mm Sheet 1 of 1			
DRAW	Change Yu 2017.12.27								
CHK	Tim 2019.10.21								
MAN	Juanli lai 2019.10.25								
STD	Alan 2019.10.25								
APP						 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			