

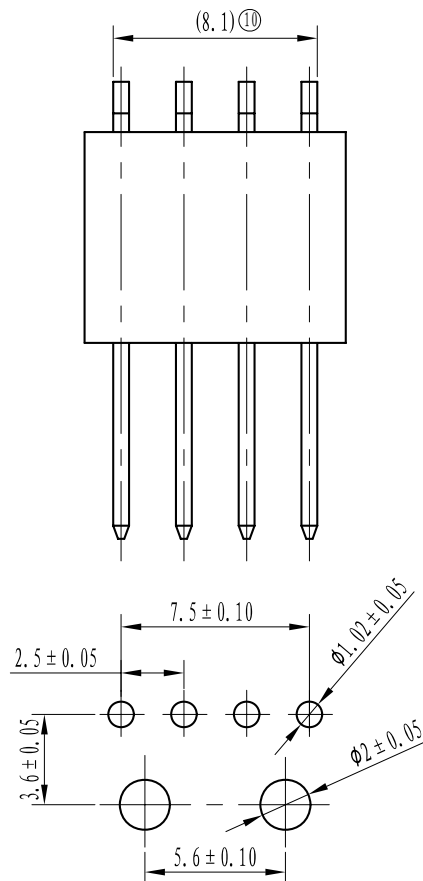
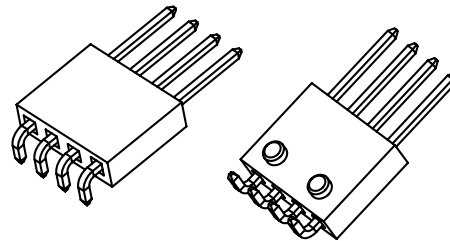


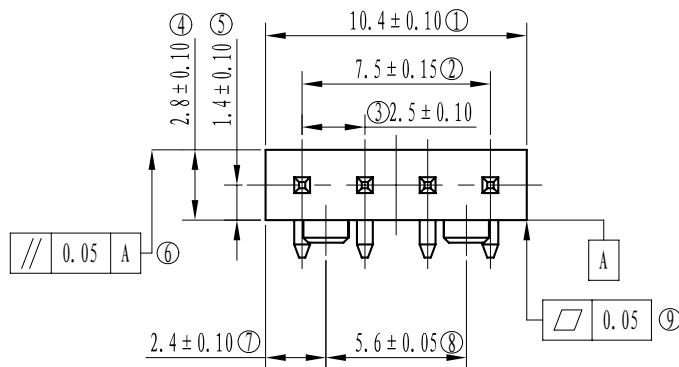

PCB LAYOUT

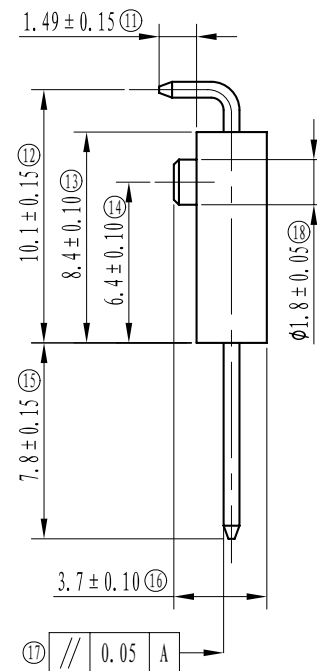

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

1.Main body part material

Insulator:PA6T Black UL94V-0

Contact terminal:Brass,1.3~2.2 μ m Ni under plated,Contact area plating Au0.076 μ m,
other surface plating Gold flash

2.Electrical requirements:

Current rating: 3 A

Contact resistance: ≤ 20 m Ω

Insulation resistance: ≥ 5000 M Ω

Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

3.Mechanical requirements

Retention force: ≥ 10 N/pin

4.Environment specification

Working temperature: -55 $^{\circ}$ C ~+125 $^{\circ}$ C

Humidity: $\leq 93\%$ at 40 $^{\circ}$ C

Resistance to soldering heat: 260 $^{\circ}$ C $\pm 5^{\circ}$ C, 10s

5.Packing & storing


Method of packing: tape&reel, outer box

Storing condition: temperature of -10 $^{\circ}$ C ~+40 $^{\circ}$ C
below 80% relative humidity

6.Style of installation: solder pcb installation

7.To prevent the pollution of the environment product info

RoHS agreement:In line with the european union RoHS.

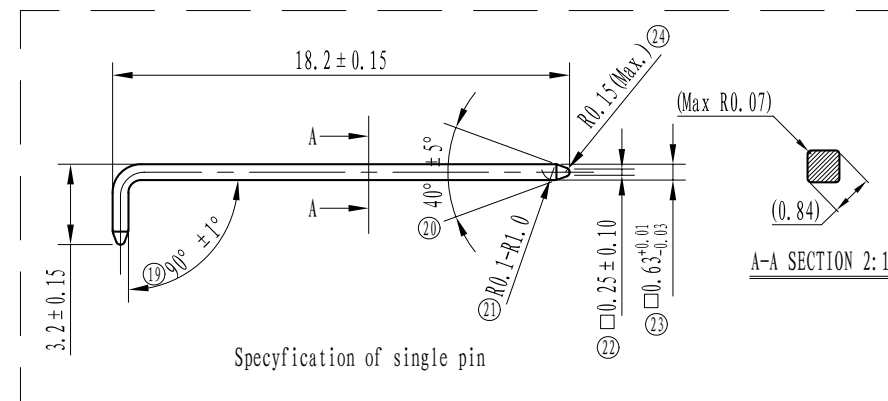

Specyfication of single pin

				SL0.1217.003			
2.5mm pitch single row terminal strips right angle				Projection	Rev.	Weight	Scale
					A0		
1217-041-19-P				All Dimensions in mm Sheet 1 of 1			
				SHINNING SHENZHEN SHINNING ELECTRONIC CO.LTD.			