


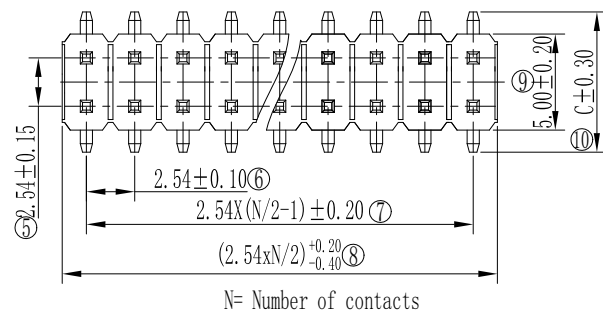


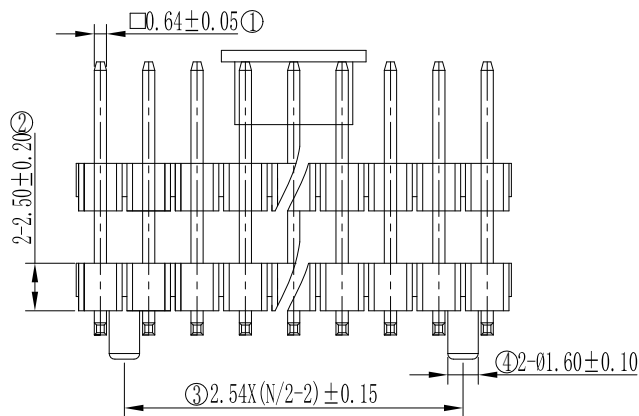

N= Number of contacts

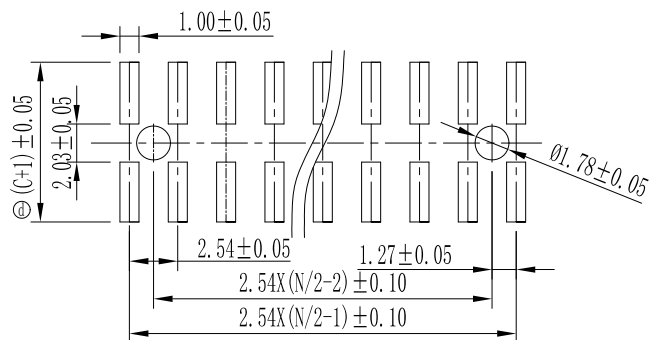

PCB Layout

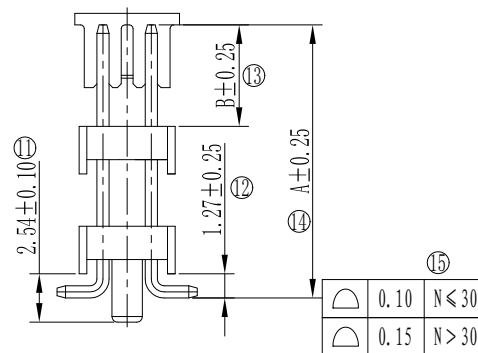

Performance characteristics:

1.Main body part material

Insulator:see part number rule

Contact terminal: Brass,1.27μm Ni under plated,Contact area plating see part number rule.

2.Electrical requirements:

Current rating: 3 A

Contact resistance: ≤20 mΩ

Insulation resistance: ≥5000 MΩ

Withstanding voltage: 1000 Vr.m.s, 1ma, 60s

3.Mechanical requirements

Retention: ≥10 N/pin

4.Environment specification

Working temperature: -55℃~+125℃

Resistance to soldering heat: 260℃±5℃, 10s

5.Packing & storing

Method of packing: Tape & Reel or Tube,Outer box

Storing condition: Temperature of -10℃~+40℃
below 80% relative humidity

6.Style of installation: SMT

7.To prevent the pollution of the environment product info

RoHS agreement:In line with the European Union RoHS.

Series code		Terminal number		Spec code		Spec code		Plating code		Insulator material & color	
1219 - XX		04~80		Code		Code		Code		Code	
				Definition		Definition		Definition		Definition	
				A B C		with cover,W/O stake		Contact area point Tail		3 LCP BLACK UL94V-0	
				1 11.40 5.50 7.90		Packing with T&R		1 Au GOLD FLASH		X Customized	
				2 12.30 5.80 7.90		with cover,with stake		2 Au 0.25μm			
				3 14.50 6.00 7.50		Packing with T&R		5 Au GOLD FLASH Sn			
				4 21.60 5.10 7.30		with cover,with stake		6 Au 0.25μm Sn			
				5 15.90 6.00 7.50		Packing with Tube		7 Au 0.38μm Sn			
				6 14.35 5.33 7.37		Customized		8 Au 0.76μm Sn			
				A 18.50 7.00 8.50				X Customized			
				B 26.00 7.00 8.50							
				C 40.00 7.00 8.50							
				D 9.44 2.80 7.40							
				7 17.00 5.00 7.50							
				J 9.65 3.30 7.50							
				M 19.50 5.00 7.50							
				S 23.62 6.22 7.37							
				X Customized							

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

①	1	461156	Jiangbo Liu	2020.06.08
②	1	327749	Zhang James	2018.08.13
③	2	245779	Huanjiang Xu	2017.09.21
Mark	NO.	File NO.	Signature	Date
DRAW			LinZhao	2013.10.08
CHK			Tim	2020.06.26
MAN				
STD			Juanli lai	2020.06.27
APP			Alan	2020.06.27

2.54mm Pitch double row
double housing SMT strips

1219-XXX-XX-X

SL0. 1219. 001

Projection	Rev.	Weight	Scale
	A6		
All Dimensions in mm		Sheet 1 of 1	
 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			