


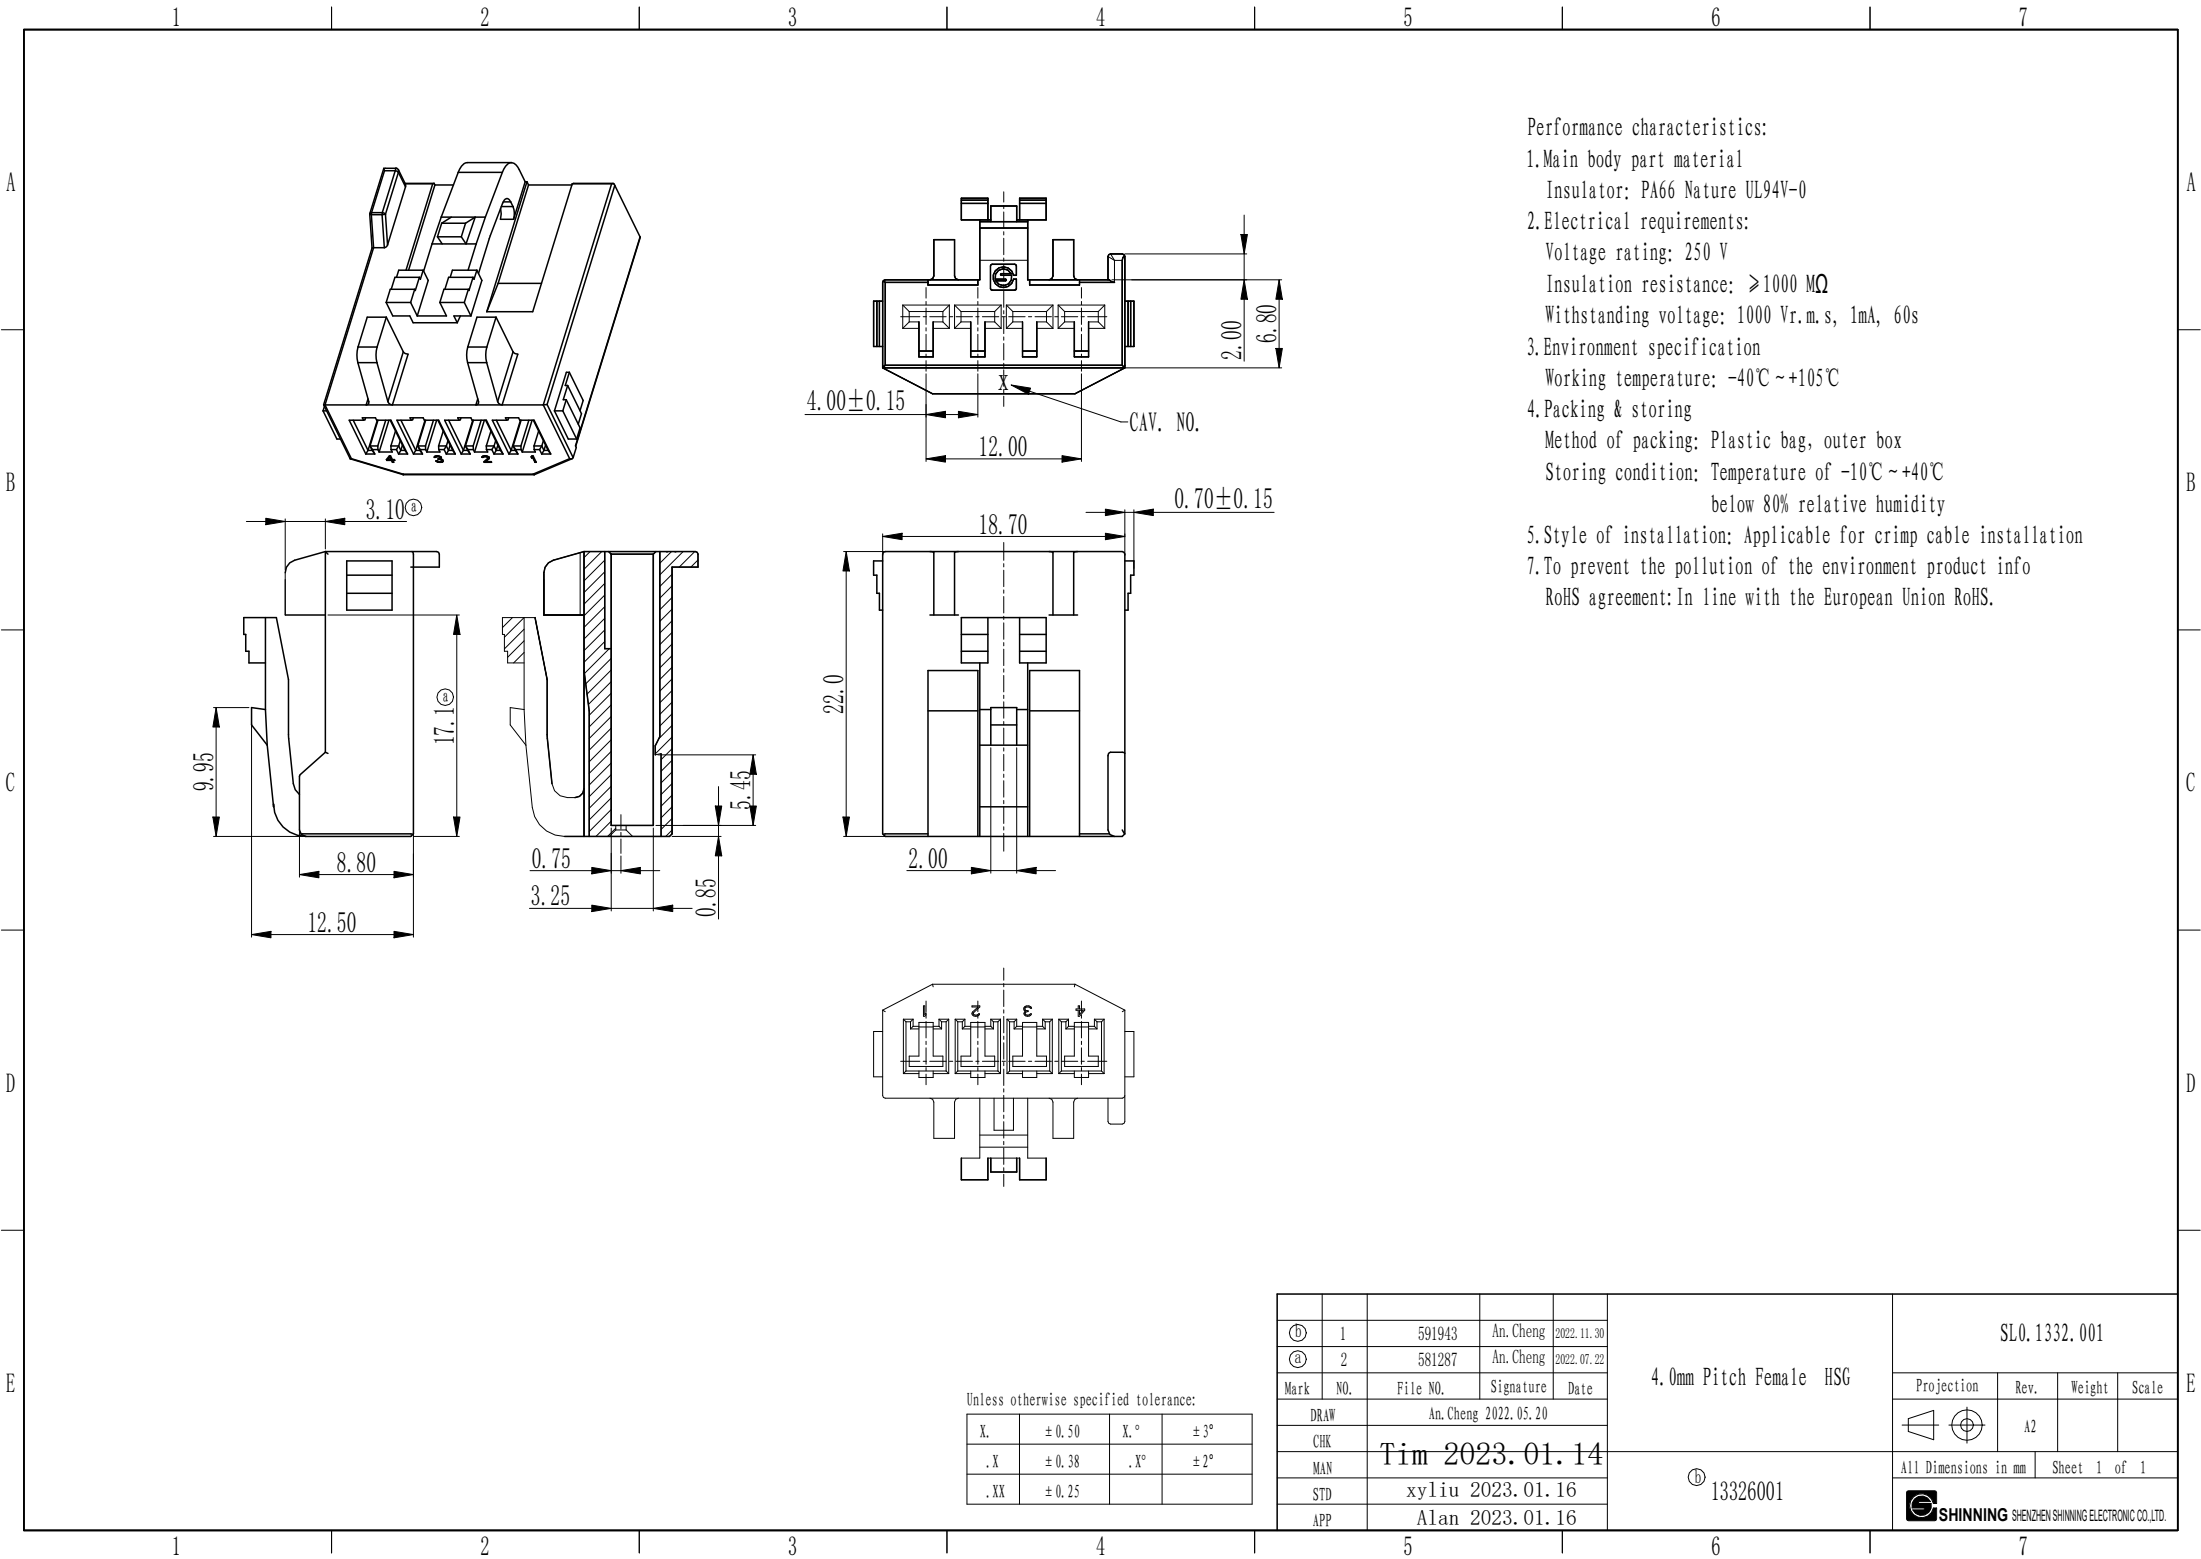

- Performance characteristics:
- 1.Main body part material
Insulator: PA66 Nature UL94V-0
 - 2.Electrical requirements:
Voltage rating: 250 V
Insulation resistance: $\geq 1000\text{ M}\Omega$
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s
 - 3.Environment specification
Working temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 - 4.Packing & storing
Method of packing: Plastic bag, outer box
Storing condition: Temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity
 - 5.Style of installation: Applicable for crimp cable installation
 - 7.To prevent the pollution of the environment product info
RoHS agreement: In line with the European Union RoHS.

Unless otherwise specified tolerance:

X.	± 0.50	X.°	$\pm 3^{\circ}$
.X	± 0.38	.X°	$\pm 2^{\circ}$
.XX	± 0.25		

①	1	591943	An.Cheng	2022.11.30
②	2	581287	An.Cheng	2022.07.22
Mark	NO.	File NO.	Signature	Date
DRAW			An.Cheng	2022.05.20
CHK				
MAN			Tim	2023.01.14
STD			xyliu	2023.01.16
APP			Alan	2023.01.16

4.0mm Pitch Female HSG	SL0.1332.001			
	Projection	Rev.	Weight	Scale
		A2		
① 13326001	All Dimensions in mm		Sheet 1 of 1	
	 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			