

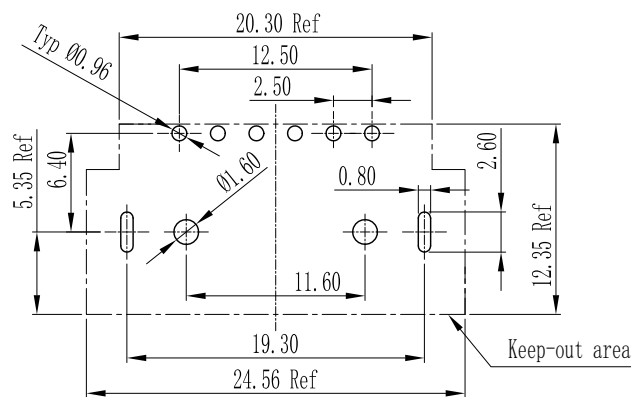
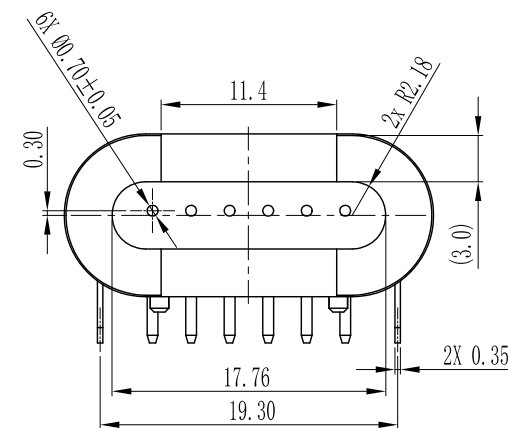
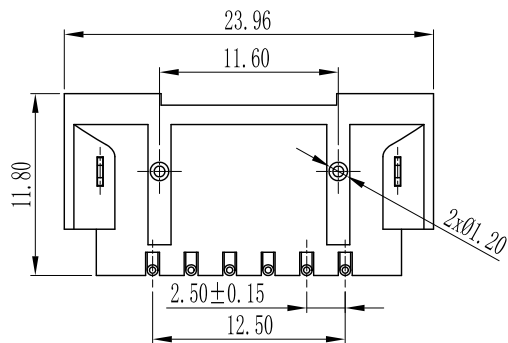


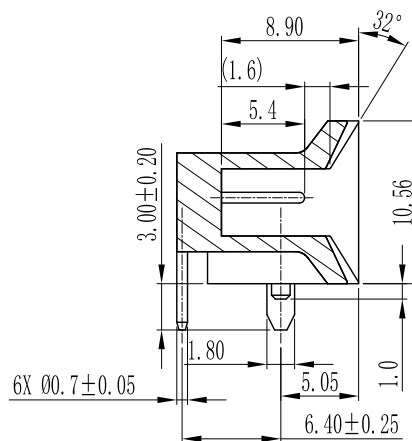

PCB Layout
PCB Thickness=1~2.0mm



Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

1.Main body part material

Insulator: LCP Black UL94V-0

Contact terminal: Brass,1.27~2μm Ni under plated,
outer plating Sn 3~5μm.

2.Electrical requirements:

Current rating: 5.6 A

Voltage rating: 250 V

Contact resistance: ≤30 mΩ, Δ10 mΩ

Insulation resistance: ≥1500 MΩ

Withstanding voltage: 1500 Vr.m.s, 1mA, 60s

3.Environment specification

Working temperature: -40℃~+105℃

Humidity: ≤93% at 40℃

Resistance to soldering heat: 260℃±5℃, 10s

4.Packing & storing

Method of packing: Tray, small outer box

Storing condition: Temperature of -10℃~+40℃
below 80% relative humidity

5.Style of installation: Solder PCB installation

6.To prevent the pollution of the environment product info

RoHS agreement:In line with the european union RoHS.

					2.50mm Pitch Single Row SPOX BMI Header right angle male	SLO.1303.002			
						Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A0		
DRAW	An.Cheng 2017.07.04								
CHK	Lawrence2017.7.10								
MAN									
STD	Spring2017.7.14								
APP	Alan2017.7.14								
1303-062-1B-3						All Dimensions in mm Sheet 1 of 1			
						 SHINNING SHENZHEN SHINNING ELECTRONIC CO.LTD.			