
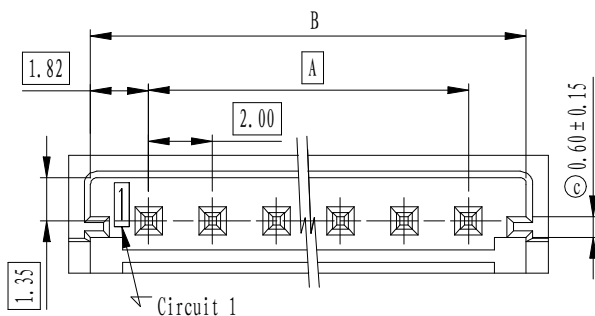
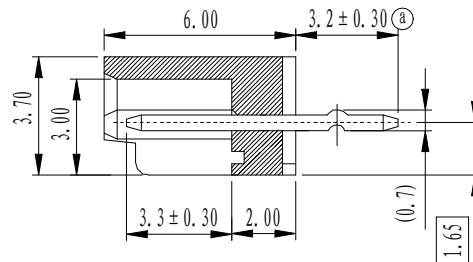
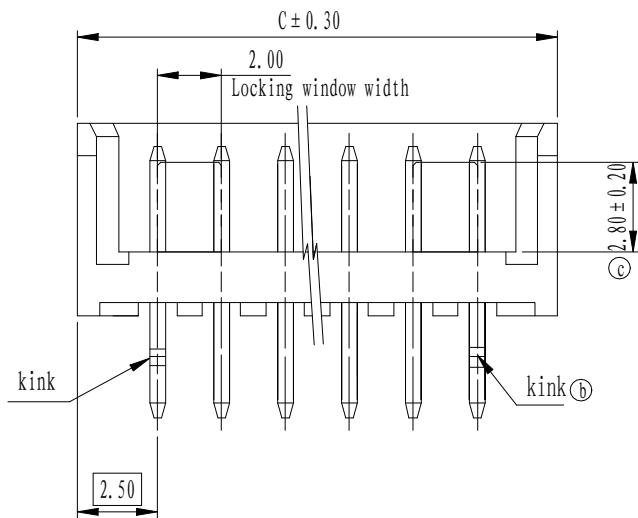


P.C.B LAYOUT TOP VIEW
(T=1.60)

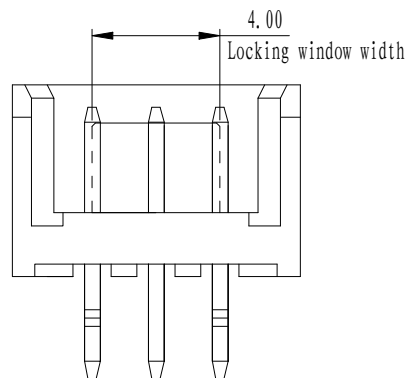

Circuit	Dimensions			Circuit	Dimensions		
	A	B	C		A	B	C
03P	4.00	7.64	9.00	12P	22.00	25.64	27.00
04P	6.00	9.64	11.00	13P	24.00	27.64	29.00
05P	8.00	11.64	13.00	14P	26.00	29.64	31.00
06P	10.00	13.64	15.00	15P	28.00	31.64	33.00
07P	12.00	15.64	17.00	16P	30.00	33.64	35.00
08P	14.00	17.64	19.00	17P	32.00	35.64	37.00
09P	16.00	19.64	21.00	18P	34.00	37.64	39.00
10P	18.00	21.64	23.00	19P	36.00	39.64	41.00
11P	20.00	23.64	25.00	20P	38.00	41.64	43.00

Unless otherwise specified tolerance:

X.	± 0.50	X.°	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

Performance characteristics:

1.Main body part material

Insulator: See part number rule

Contact terminal: Brass, 1.27~3μm Ni under plated,
outer plating see part number rule

2.Electrical requirements:

Current rating: 1.5 A

Voltage rating: 125 V

Contact resistance: ≤20 mΩ

Insulation resistance: ≥1000 MΩ

Withstanding voltage: 500 Vr.m.s, 1mA, 60s

3.Environment specification

Working temperature: -40℃~+105℃

4.Packing & storing

Method of packing: Plastic bag, small outer box


Storing condition: Temperature of -10℃~+40℃

below 80% relative humidity

5.Style of installation: Solder PCB installation

6.To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS.

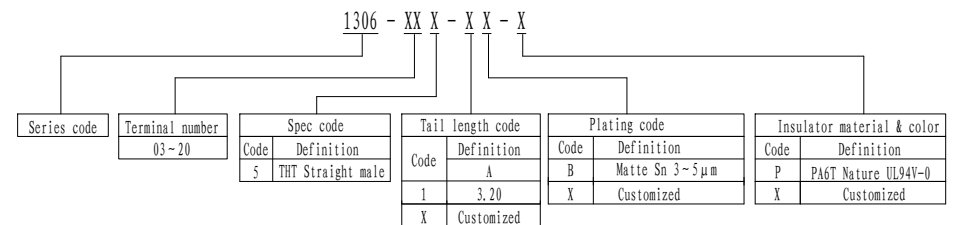

①	2	591179	James Zhang	2022.11.21
②	1	246185	An.Cheng	2017.09.22
③	1	188097	An.Cheng	2017.02.10
Mark	NO.	File NO.	Signature	Date
DRAW			An.Cheng	2016-09-20
CHK				
MAN				
STD				
APP				

2.0mm Board to Board wafer
Male connector

1306-XX5-1B-P

SL0.1306.001

Projection	Rev.	Weight	Scale
	A3		
All Dimensions in mm		Sheet 1 of 1	
 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			