

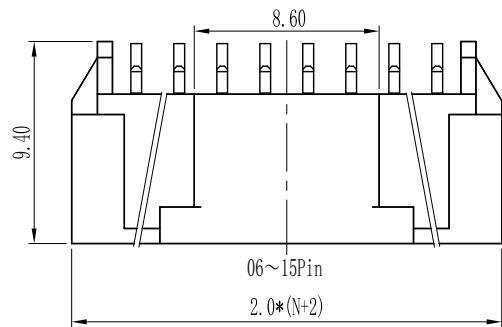

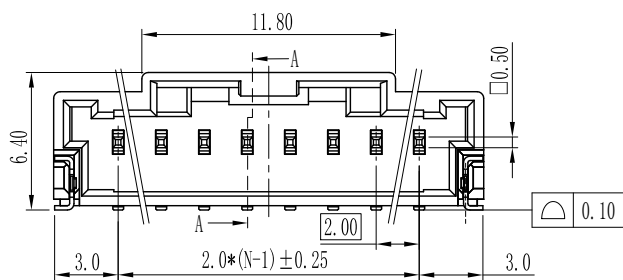











N=Number of contacts

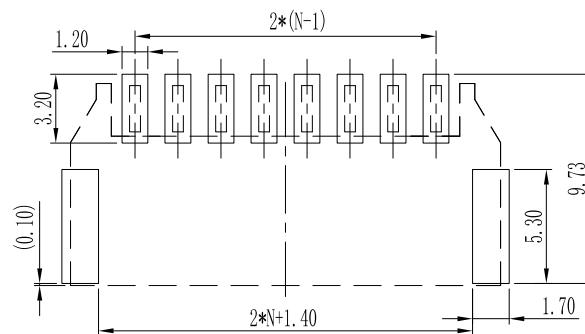

P.C.B LAYOUT
TOP VIEW
Tolerance: ± 0.05

Unless otherwise specified tolerance:

X.	± 0.50	X. °	$\pm 3^\circ$
.X	± 0.38	.X°	$\pm 2^\circ$
.XX	± 0.25		

Performance characteristics:

1.Main body part material

Insulator: LCP Nature UL94V-0

Contact terminal: Brass, 1.27 μ m Min. Ni under plated,
outer plating Matte Sn 3 μ m Min.

2.Electrical requirements:

Current rating: 3 A

Voltage rating: 125 V

Contact resistance: ≤ 10 m Ω

Insulation resistance: ≥ 1000 M Ω

Withstanding voltage: 500 Vr.m.s, 1mA, 60s

3.Environment specification

Working temperature: -40℃~+125℃

4.Packing & storing

Method of packing: Tape & reel, outer box


Storing condition: Temperature of -10℃~+40℃
below 80% relative humidity

5.Style of installation: SMT

6.To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

1346 - XX X - X X - X

Series code	Terminal number	Spec code	Installation code	Plating code	Insulator material & color
	02~15	Code Definition	Code Definition	Code Definition	Code Definition
		5 Type 5	A 180° SMT	B Matte Sn 3 μ m Min.	N LCP Nature UL94V-0
				X Customized	X Customized



Mark	NO.	File NO.	Signature	Date	2.00mm Pitch wafer Type 5				SL0. 1346. 009			
DRAW					An.Cheng 2018.08.25				Projection	Rev.	Weight	Scale
CHK					Lawrence2018.9.3					A0		
MAN									All Dimensions in mm Sheet 1 of 1			
STD					Spring2018.9.3				1346-XX5-XX-X			
APP					Alan2018.9.3				SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			