
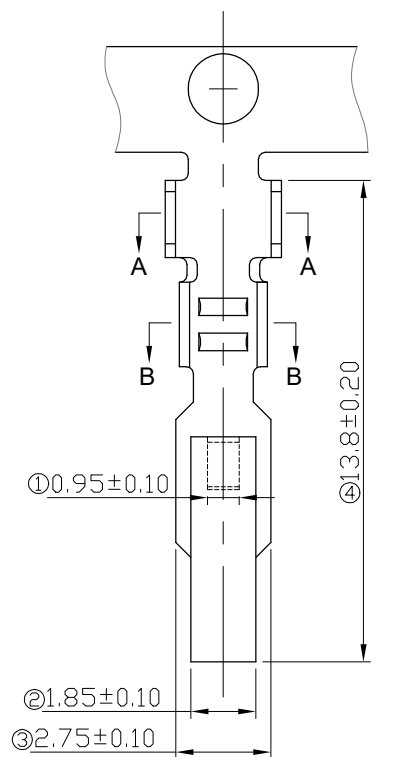



A-A

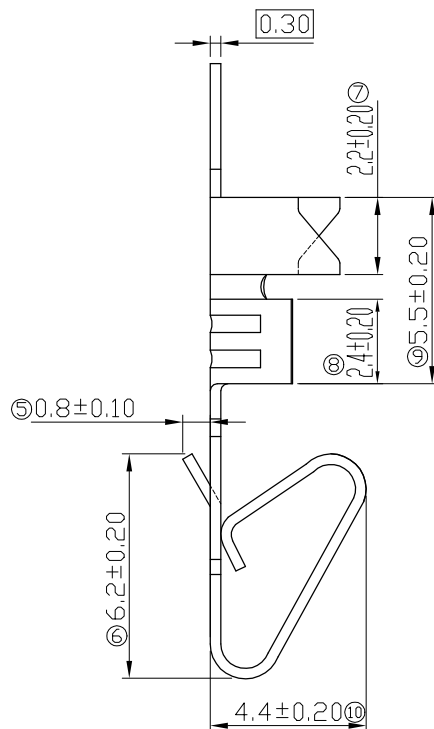

B-B

Performance characteristics:

1. Main body part material
 @Contact terminal: Phosphor bronze, $1.27\mu\text{m}$ Ni under plated, outer plating Sn $1.0\mu\text{m}$ Min.
2. Electrical requirements:
 Current rating: 7 A
 Voltage rating: 250 V
 Contact resistance: $\leq 10\text{ m}\Omega$
3. Mechanical requirements
 Wire gauge: AWG18~22
4. Environment specification
 Working temperature: $-40^\circ\text{C} \sim +105^\circ\text{C}$
5. Packing & storing
 Method of packing: Paper reel
 Storing condition: temperature of $-10^\circ\text{C} \sim +40^\circ\text{C}$
 below 80% relative humidity
6. Style of installation: Applicable for crimp cable installation.
7. To prevent the pollution of the environment product info
 RoHS agreement: In line with the European Union RoHS.

Unless otherwise specified tolerance:

X.	± 0.50	X. °	$\pm 3^\circ$
.X	± 0.38	.X °	$\pm 2^\circ$
.XX	± 0.25		

					3.96mm Wafer female terminal	SL0. 1344. 129			
④	1	464005	Tim Lv	2020.06.23		Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			B1		
DRAW	Tim Lv 2017.07.14								
CHK	Lawrence 2020.09.08								
MAN									
STD	Juanli lai 2020.09.11				13443002	All Dimensions in mm			Sheet 1 of 1
APP	Alan 2020.09.11					 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			