
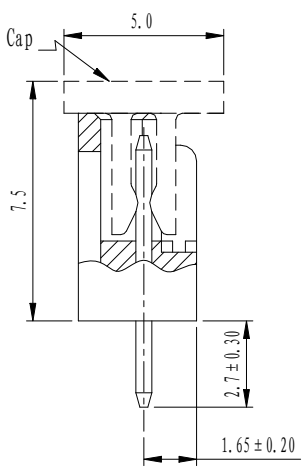
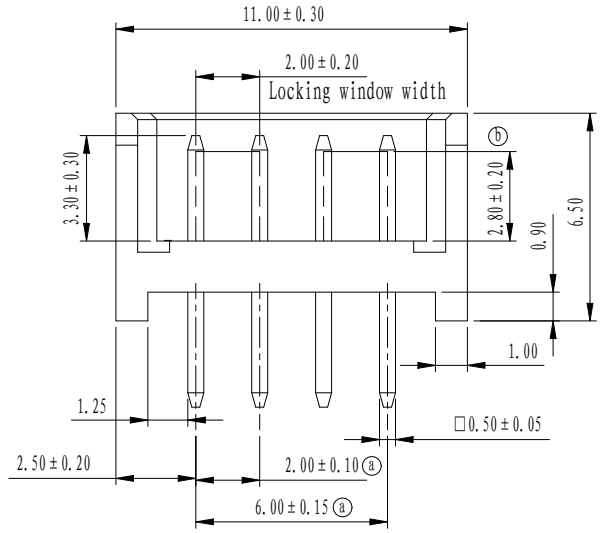


P.C.B LAYOUT TOP VIEW
Tolerance: ±0.05

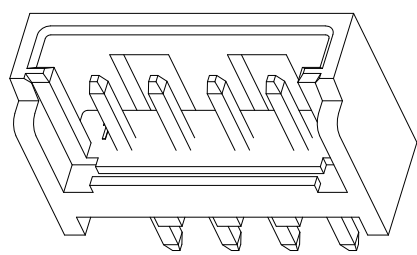

- Performance characteristics:
- 1.Main body part material
Insulator: LCP Nature UL94V-0
Contact terminal: Brass, 1.27μm Min. Ni under plated, outer plating Matte Sn 3μm Min.
 - 2.Electrical requirements:
Current rating: 1.5 A
Voltage rating: 125 V
Contact resistance: ≤20 mΩ
Insulation resistance: ≥1000 MΩ
Withstanding voltage: 500 Vr.m.s, 1mA, 60s
 - 3.Environment specification
Working temperature: -40℃ ~ +105℃
Humidity: ≤93% at 40℃
Resistance to soldering heat: 260℃, 30s
 - 4.Packing & storing
Method of packing: Tape & reel, outer box
Storing condition: Temperature of -10℃ ~ +40℃
below 80% relative humidity
 - 5.Style of installation; Solder PCB installation (THT or PIP).
 - 6.To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

Unless otherwise specified tolerance:

X.	± 0.50	X. °	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

①	2	591179	James Zhang	2022.11.21
②	2	449594	An.cheng	2020.04.13
Mark	NO.	File NO.	Signature	Date
DRAW			An.Cheng	2019-10-16
CHK				
MAN				
STD				
APP				

2.0mm Board to Board wafer
Male connector

1306-04A-2B-N

SL0. 1306. 003			
Projection	Rev.	Weight	Scale
	A2		
All Dimensions in mm		Sheet 1 of 1	
 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			