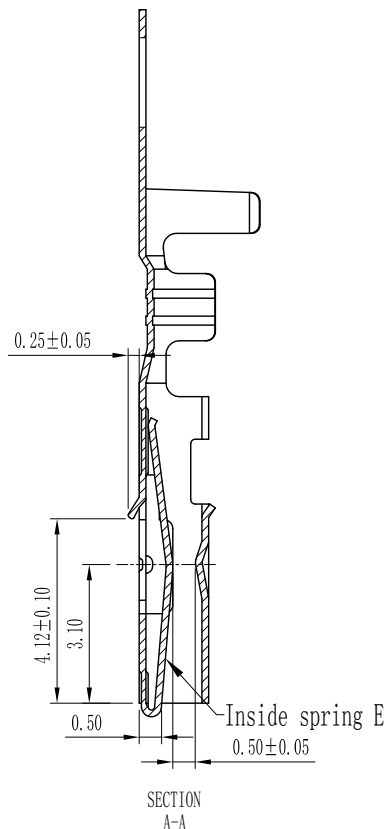


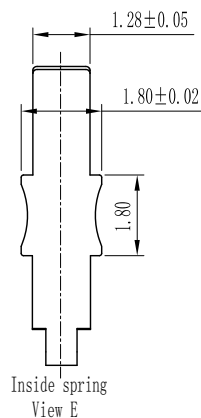

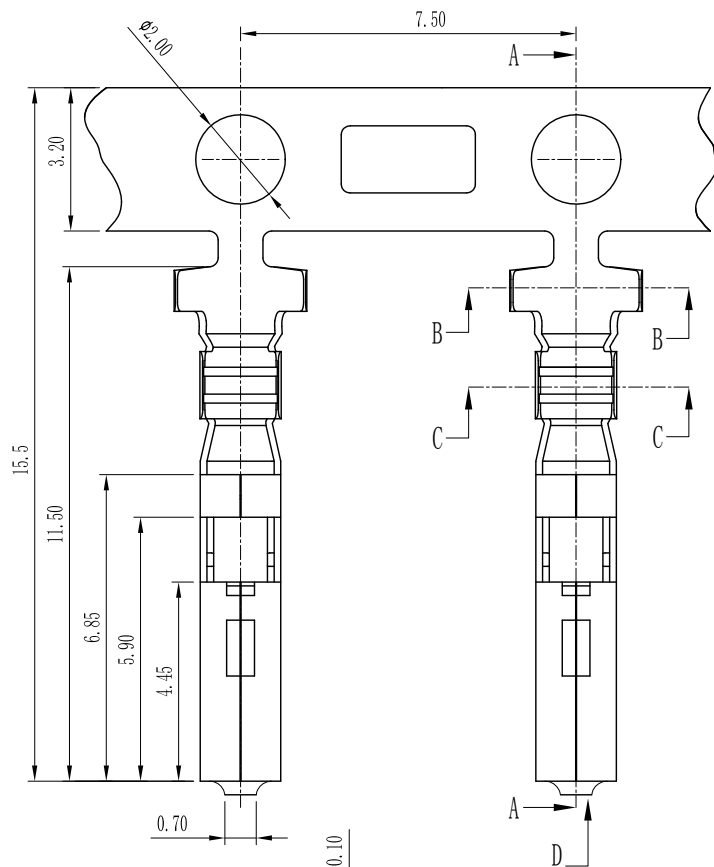


Performance characteristics:

1. Main body part material
Contact terminal: Phosphor bronze, 1.27μm Min. Ni under plated, Outer plating Gold Flash.
2. Electrical requirements:
Current rating: 3 A
Voltage rating: 250 V
Contact resistance: ≤20 mΩ
3. Mechanical requirements
Insertion force: ≤3.0N (Use 0.64X0.64 plating Gold Pin test)
Withdraw force: ≥0.5N (Use 0.64X0.64 plating Gold Pin test)
Durability: 50 cycles
Wire gauge: AWG22~26
4. Environment specification
Salt Spray: 24/hours
Working temperature: -40℃~+105℃
5. Packing & storing
Number of packing: 8000pcs/reel
Method of packing: Paper reel, outer box.
Storing condition: temperature of -10℃~+40℃ below 80% relative humidity
6. Style of installation: With the female housing assembly
7. To prevent the pollution of the environment product info
RoHS agreement: In line with the European Union RoHS.

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

					2.54mm RA connector female terminal		SL0. 1261.005			
Mark	NO.	File NO.	Signature	Date			Projection	Rev.	Weight	Scale
DRAW			An.Cheng	2016.06.16				B0		
CHK			Tim	2016.11.30			Sheet 1 1 of 1			
MAN			Eva	2016.12.06						
STD			Alang	2016.12.06						
APP					12613010		SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			