

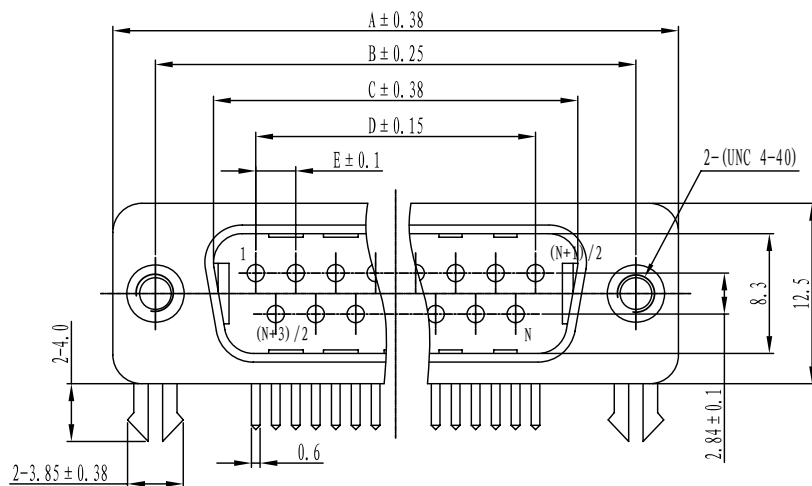
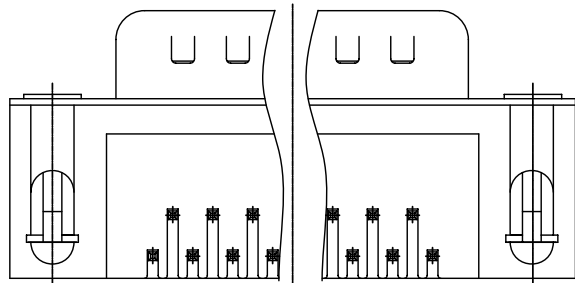


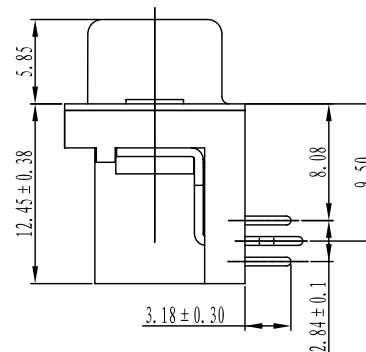

Note: N for the total number of terminals

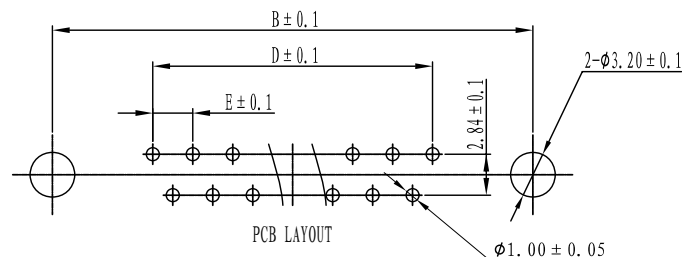

Size table

Pin number	A	B	C	D	E
9Pin	30.80	25.00	16.92 ^①	10.96	2.74
15Pin	39.20	33.30	25.25 ^①	19.18	2.74
25Pin	53.04	47.04	38.96 ^①	33.12	2.76
37Pin	69.40	63.50	55.42 ^①	49.68	2.76

Performance characteristics:

1.Main body part material

Insulator: see spec list

Contact terminal: Brass, 1.27μm Ni under plated, outer plating see spec list

Crust: SPCC; front shell plating Ni

2.Electrical requirements:

Current rating: 5 A

Voltage rating: 300 V

Contact resistance: ≤15 mΩ

Insulation resistance: ≥5000 MΩ

Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

3.Environment specification

Working temperature: -40℃~+100℃

4.Applicable standard: IEC60807

5.Packing & storing

Method of packing: Tray , inner box, outer box

Storing condition: temperature of -10℃~+40℃

below 80% relative humidity

6.Style of installation: solder PCB installation

7.To prevent the pollution of the environment product

info: In line with the european union RoHS

Series code		Terminal number		Spec code		Type code		Plating code		Insulator material & color	
		9, 15, 25, 37		Code Definition		Code Definition		Code Definition		Code Definition	
				1 Male		X Customized		1 Gold flash Gold flash		1 PBT black UL94V-0	
								2 Au0.25μm Gold flash		9 PBT blue UL94V-0	
								3 Au0.38μm Gold flash		R PBT black UL94V-0	
								4 Au0.76μm Gold flash		⑥ Screw with glue	
								5 Gold flash Sn3~5μm		X Customized	
								6 Au0.25μm Sn3~5μm			
								7 Au0.38μm Sn3~5μm			
								8 Au0.76μm Sn3~5μm			
								X Customized			

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

					D-SUB PCB Right angle, solder tail Male	SL0.1408.100			
①	1	PCN-201501047	mh huang	2015.01.22		Projection	Rev.	Weight	Scale
②	4	SN-00003065	daisyliu	2013.09.17			A2		
Mark	NO.	File NO.	Signature	Date					
DRAW		lei 2008.12.17							
CHK									
MAN									
STD									
APP									
1408-XX1-XX-X						All Dimensions in mm		Sheet 1 of 2	
					 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.				

A

BCD

E