


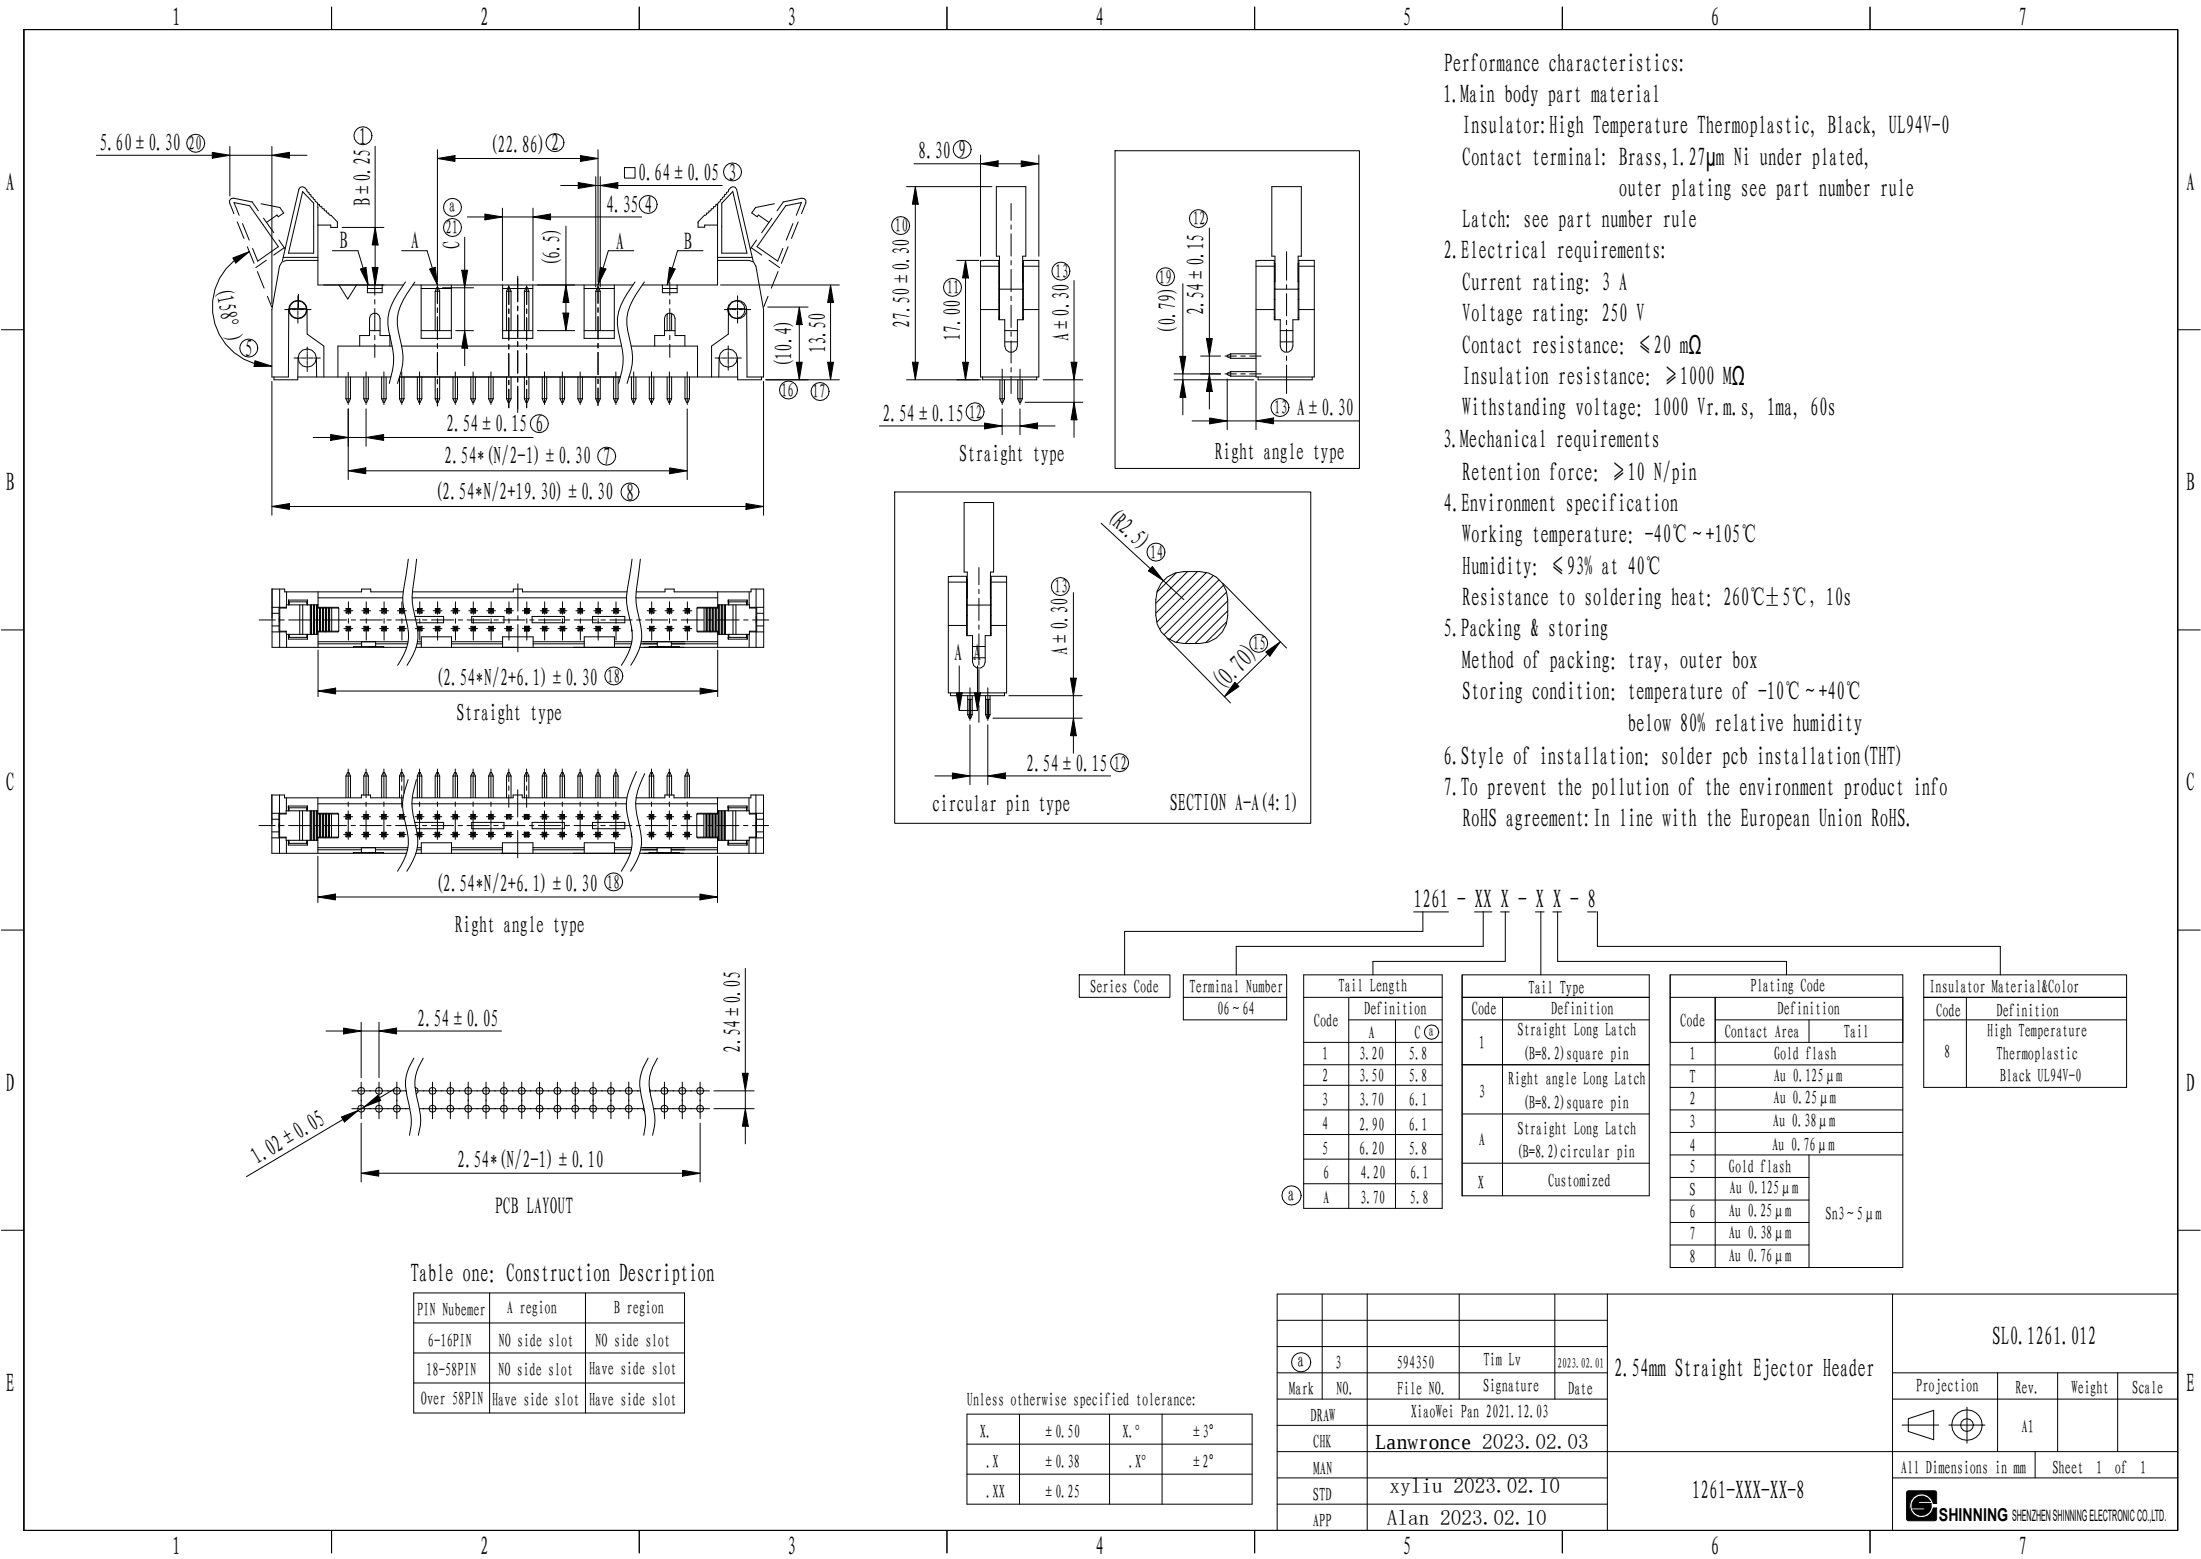

Performance characteristics:

1.Main body part material

Insulator:High Temperature Thermoplastic, Black, UL94V-0

Contact terminal: Brass,1.27μm Ni under plated,
outer plating see part number rule

Latch: see part number rule

2.Electrical requirements:

Current rating: 3 A

Voltage rating: 250 V

Contact resistance: ≤20 mΩ

Insulation resistance: ≥1000 MΩ

Withstanding voltage: 1000 Vr.m.s, 1ma, 60s

3.Mechanical requirements

Retention force: ≥10 N/pin

4.Environment specification

Working temperature: -40℃~+105℃

Humidity: ≤93% at 40℃

Resistance to soldering heat: 260℃±5℃, 10s

5.Packing & storing

Method of packing: tray, outer box

Storing condition: temperature of -10℃~+40℃
below 80% relative humidity

6.Style of installation: solder pcb installation(THT)

7.To prevent the pollution of the environment product info

RoHS agreement:In line with the European Union RoHS.

Table one: Construction Description

PIN Nubemer	A region	B region
6-16PIN	NO side slot	NO side slot
18-58PIN	NO side slot	Have side slot
Over 58PIN	Have side slot	Have side slot

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

①	3	594350	Tim Lv	2023.02.01
Mark	NO.	File NO.	Signature	Date
DRAW			XiaoWei Pan 2021.12.03	
CHK			Lanwronce 2023.02.03	
MAN				
STD			xyliu 2023.02.10	
APP			Alan 2023.02.10	

2.54mm Straight Ejector Header

1261-XXX-XX-8

SL0.1261.012

Projection	Rev.	Weight	Scale
	A1		
All Dimensions in mm		Sheet 1 of 1	
 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			