
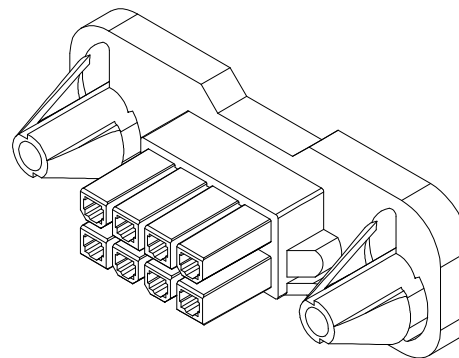


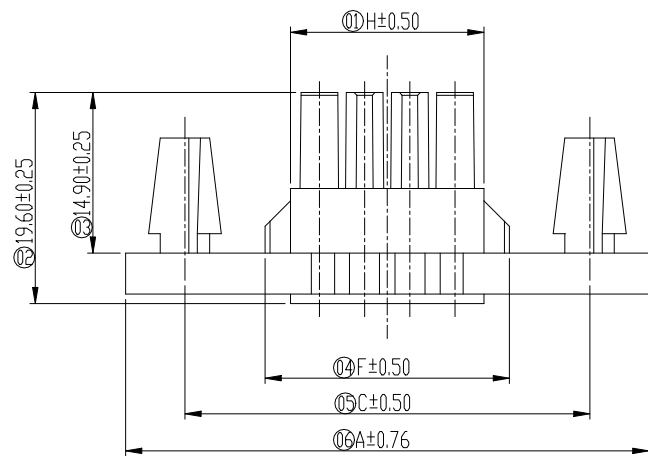

Performance characteristics:

1. Main body part material

Insulator: PA66 Nature UL94V-0

2. Electrical requirements:

⑤ Current rating: 6A/pin (terminal 13483014)

Voltage rating: 600 V DC

Insulation resistance: $\geq 1000 \text{ M}\Omega$

⑤ Withstanding voltage: 2200 V r.m.s., 1mA, 60s

⑤ 3. Mechanical requirements

Retention Force: $\geq 30\text{N/PIN}$

4. Environment specification

Working temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

5. Packing & storing




⑤ Method of packing: small box, outer box

Storing condition: temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity

6. Style of installation: Applicable for Crimp Cable Installation

7. To prevent the pollution of the environment product info

RoHS agreement: In line with the European Union RoHS.

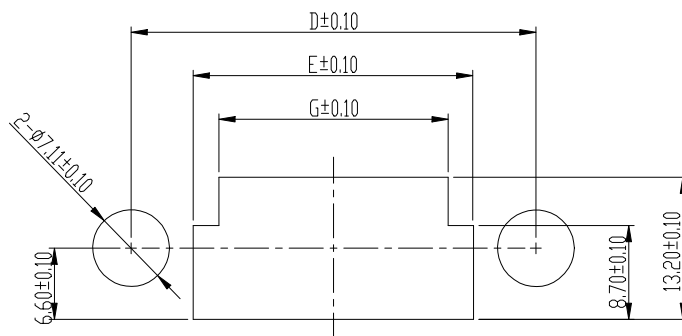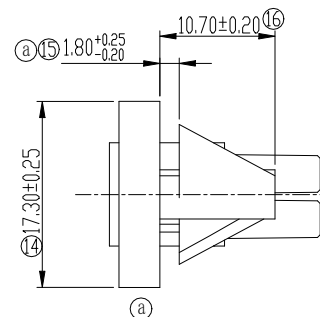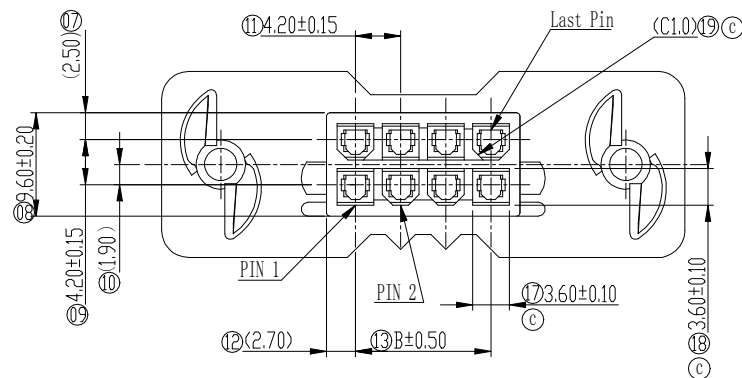

Recommended Panel Cut-out For 1.27 Thick

Unless otherwise specified tolerance:

X.	± 0.50	X.°	$\pm 3^{\circ}$
.X	± 0.38	.X°	$\pm 2^{\circ}$
.XX	± 0.25		

Part No.	Pin No.	Dimensions							
		A	B	C	D	E	F	G	H
13481050	2*12	82.20	46.20	71.20	71.20	59.60	56.30	54.90	51.60
13481052	2*05	52.80	16.80	41.80	41.80	30.20	26.90	25.50	22.20
13481053	2*07	61.20	25.20	50.20	50.20	38.60	35.30	33.90	30.60
⑤ 13481107	2*09	69.60	33.60	58.60	58.60	47.00	43.70	42.30	39.00

③	3	591179	Change Yu	2022.11.22
④	5	438012	Jiangbo Liu	2020.01.10
⑤	2	389261	Jiangbo Liu	2019.05.25
Mark	NO.	File NO.	Signature	Date
DRAW		qqli	2018.12.13	
CHK				
MAN				
STD				
APP				

4.20mm Pitch
Dual Row Housing

13481XXX

SL0.1348.022

Projection	Rev.	Weight	Scale
	A3		
All Dimensions in mm			
Sheet 1 of 1			
SHINNING SHENZHEN SHINNING ELECTRONIC CO., LTD.			