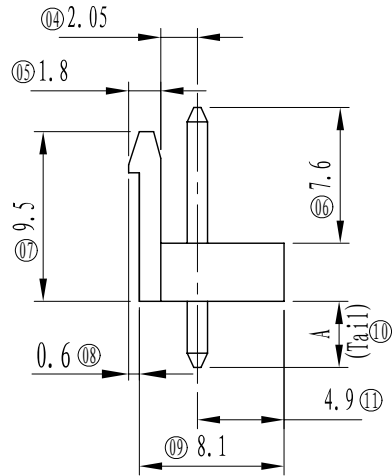
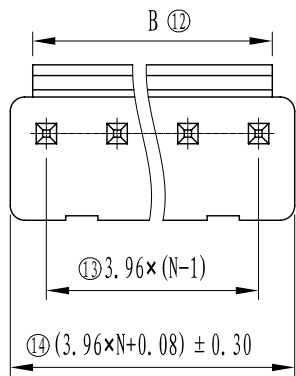
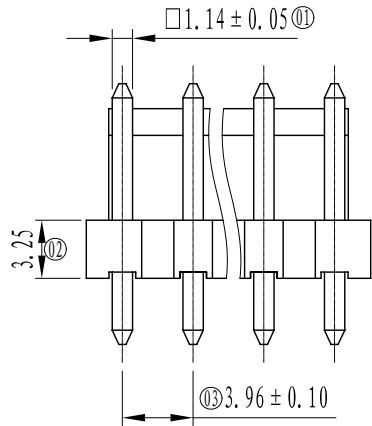


PCB Layout

P/N	B
1344-02X-XX-X	5.45
1344-03X-XX-X	9.41
1344-04X-XX-X	13.37
1344-05X-XX-X	17.33
1344-06X-XX-X	21.29
1344-07X-XX-X	25.25
1344-08X-XX-X	29.21
1344-09X-XX-X	33.17
1344-10X-XX-X	37.13
1344-11X-XX-X	41.09
1344-12X-XX-X	45.05

Performance characteristics:

1.Main body part material

Insulator: See part number rule

Contact terminal: Brass, 1.27 μ m Ni under plated,
outer plating see part number rule

2.Electrical requirements:

Current rating: 7 A

Voltage rating: 250 V

Contact resistance: ≤ 10 m Ω

Insulation resistance: ≥ 1000 M Ω

Withstanding voltage: 1500 Vr.m.s, 1mA, 60s

3.Environment specification

Working temperature: -40 $^{\circ}$ C ~ +105 $^{\circ}$ C


4.Packing & storing

Method of packing: Plastic bag, outer box

Storing condition: Temperature of -10 $^{\circ}$ C ~ +40 $^{\circ}$ C
below 80% relative humidity

5.Style of installation: Solder PCB installation

6.To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

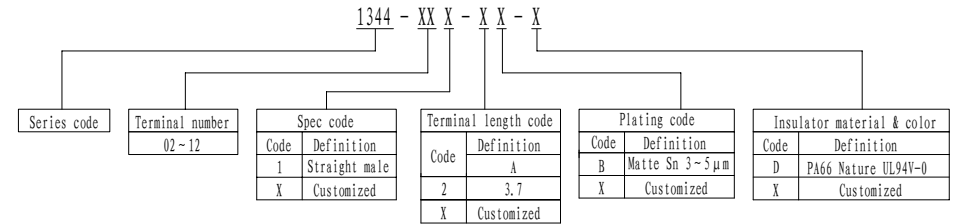

Unless otherwise specified tolerance:

X.	± 0.50	X.°	$\pm 3^{\circ}$
.X	± 0.38	.X°	$\pm 2^{\circ}$
.XX	± 0.25		

					3.96mm Pitch wafer straight male (HX)	SL0.1344.128			
						Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A0		
DRAW		An. Cheng 2013-07-19							
CHK									
MAN					1344	All Dimensions in mm		Sheet 1 of 1	
STD									
APP						 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			