


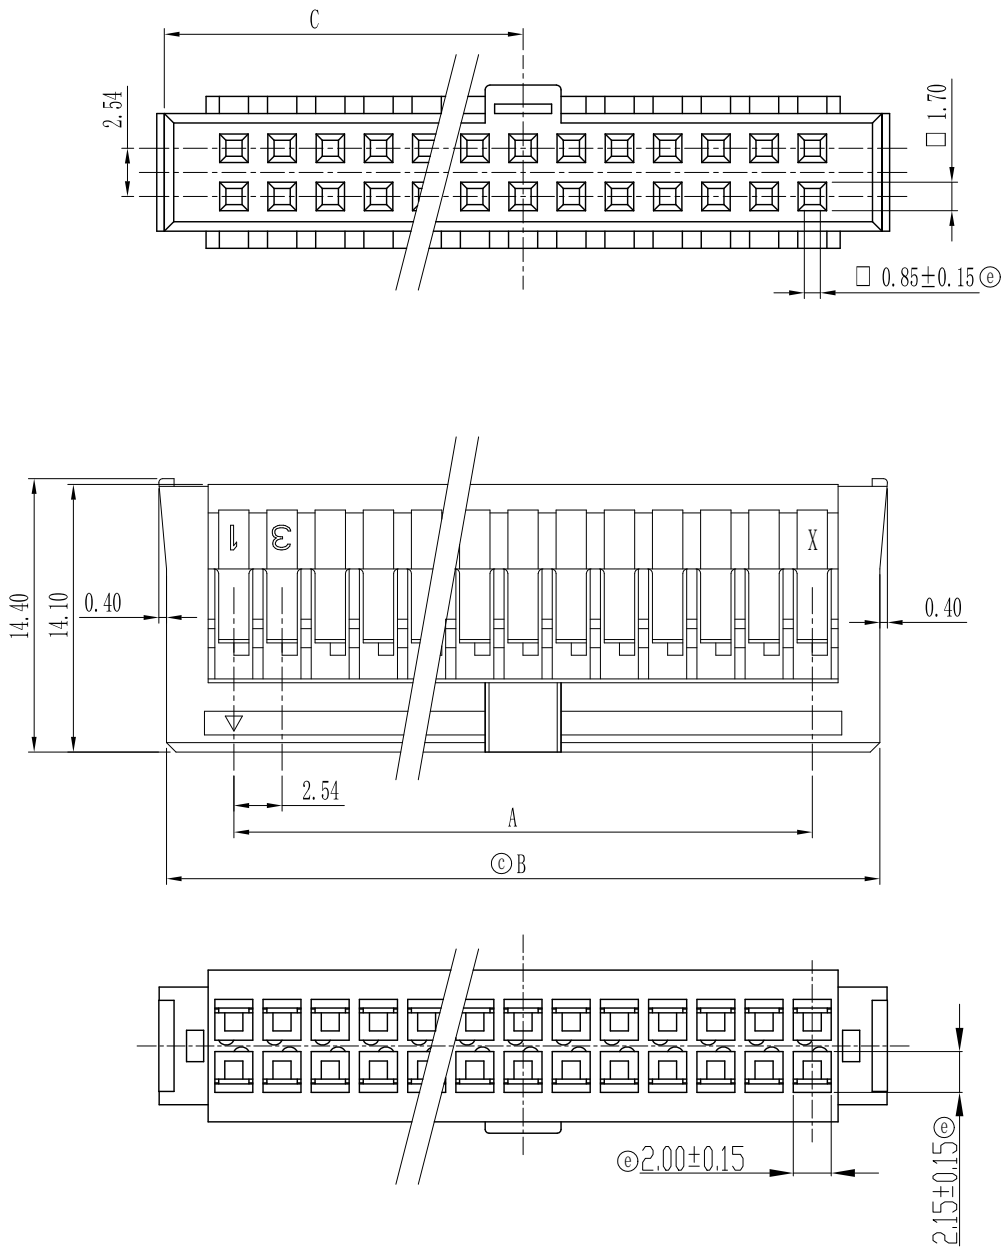

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

1.Main body part material

Insulator: PBT Black UL94V-0

2.Electrical requirements:

Current rating: 3 A

Voltage rating: 250 V

Insulation resistance: $\geq 1000 \text{ M}\Omega$

Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

3.Environment specification

Working temperature: -40℃~+105℃

4.Packing & storing

Method of packing: Plastic bag, inner box, outer box

Storing condition: Temperature of -10℃~+40℃
below 80% relative humidity

5.Style of installation: Applicable for crimp cable installation

7.To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS.

©Size table:

Part No.	Pin	A	B	C
12611038	10	10.16	17.26	8.63
12611036	14	15.24	22.35	11.17
12611039	16	17.78	24.88	12.44
12611040	20	22.86	29.96	14.98
12611034	26	30.48	37.59	18.80
12611041	30	35.56	42.66	21.33
12611042	34	40.64	47.74	23.87
12611035	40	48.26	55.37	27.68
12611037	50	60.96	68.07	34.03
12611043	60	73.66	80.76	40.38
12611044	64	78.74	85.84	42.92

④	4	529666	An. Cheng	2021.08.10	2.54mm RA connector female housing	SL0. 1261.006				
③	1	121751	An. Cheng	2016.06.27						
②	1	116166	An. Cheng	2016.05.25						
Mark	NO.	File NO.	Signature	Date						
DRAW		An. Cheng 2021.08.10			12611034~12611044	Projection		Rev.	Weight	Scale
CHK		Tim 2021.08.12						A4		
MAN										
STD		Juanli lai 2021.08.13			12611034~12611044	Sheet 1		1 of 1		
APP		Alan 2021.08.13								
						 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.				