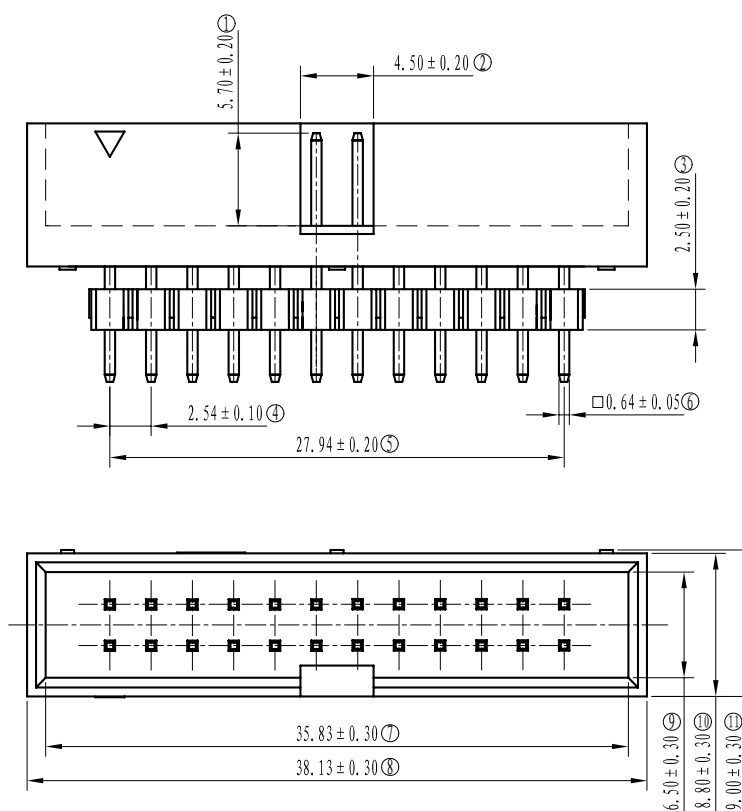


- Performance characteristics:
1. Main body part material
④ Insulator: See drawing Black UL94V-0
Contact terminal: Brass 1.27 μ m Ni under plated, contact area plating Au 0.25 μ m, tail plating Sn 3~5 μ m
 2. Electrical requirements:
Current rating: 3 A
Contact resistance: ≤ 20 m Ω
Insulation resistance: ≥ 5000 M Ω
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s
 3. Mechanical requirements
Retention force: ≥ 10 N/pin
 4. Environment specification
Working temperature: -55 $^{\circ}$ C ~ +125 $^{\circ}$ C
Humidity: $\leq 93\%$ at 40 $^{\circ}$ C
Resistance to soldering heat: 260 $^{\circ}$ C $\pm$ 5 $^{\circ}$ C, 10s
 5. Packing & storing
Method of packing: plastic bag, outer box
Storing condition: temperature of -10 $^{\circ}$ C ~ +40 $^{\circ}$ C below 80% relative humidity
 6. Style of installation: solder pcb installation
 7. To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

Unless otherwise specified tolerance:

X.	± 0.50	X. $^{\circ}$	$\pm 3^{\circ}$
.X	± 0.38	.X $^{\circ}$	$\pm 2^{\circ}$
.XX	± 0.25		

					2.54 pitch Stacker Header 2x12pin	SL0.1234.106			
③	2	SN-00003221	Tim Lv	2013.11.28					
Mark	NO.	File NO.	Signature	Date					
DRAW		Tim Lv 2013.08.05							
CHK									
MAN					1234-24J-26-P ④				
STD									
APP									
					Projection				
					Rev.				
					Weight				
					Scale				
									
					A1				
					All Dimensions in mm		Sheet 1 of 1		
					 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.				