

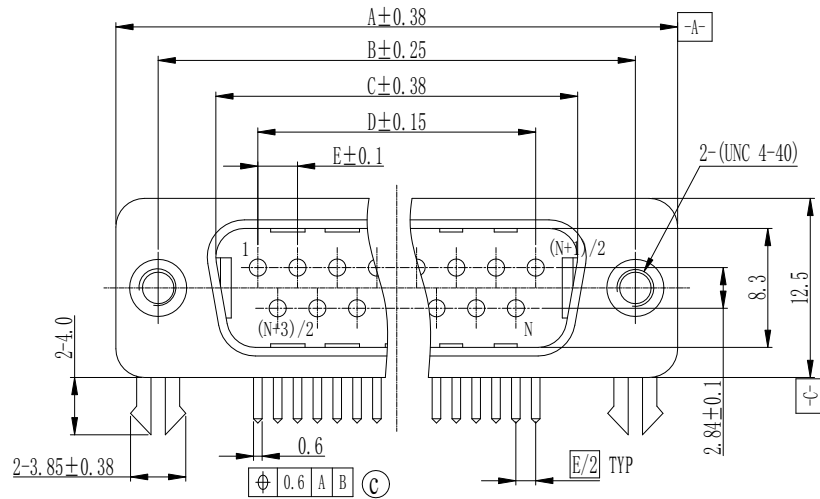
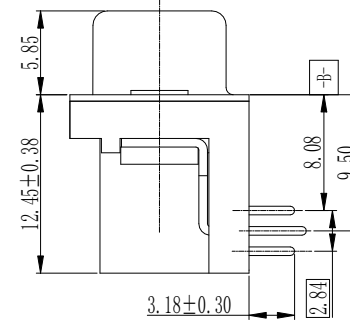


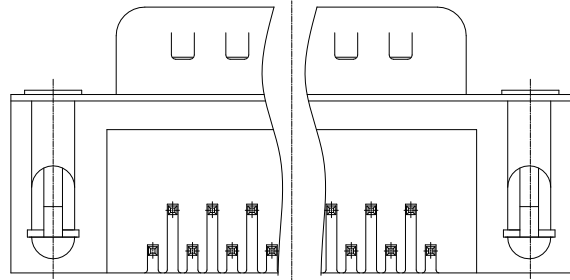

Note: N for the total number of terminals

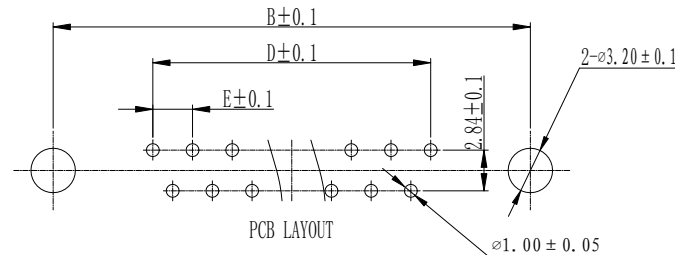


Size table

Pin number	A	B	C	D	E
9Pin	30.80	25.00	16.92 ^①	10.96	2.74
15Pin	39.20	33.30	25.25 ^①	19.18	2.74
25Pin	53.04	47.04	38.96 ^①	33.12	2.76
37Pin	69.40	63.50	55.42 ^①	49.68	2.76

Performance characteristics:

- Main body part material
Insulator: see spec list
Contact terminal: Brass, 1.27μm Ni under plated, outer plating see spec list
Crust: SPCC; front shell plating Ni
- Electrical requirements:
Current rating: 5 A
Voltage rating: 300 V
Contact resistance: <15 mΩ
Insulation resistance: >5000 MΩ
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s
- Environment specification
Working temperature: -40℃~+100℃
- Applicable standard: IEC60807
- Packing & storing
Method of packing: Tray, inner box, outer box
Storing condition: temperature of -10℃~+40℃
below 80% relative humidity
- Style of installation: solder PCB installation
- To prevent the pollution of the environment product info: In line with the european union RoHS

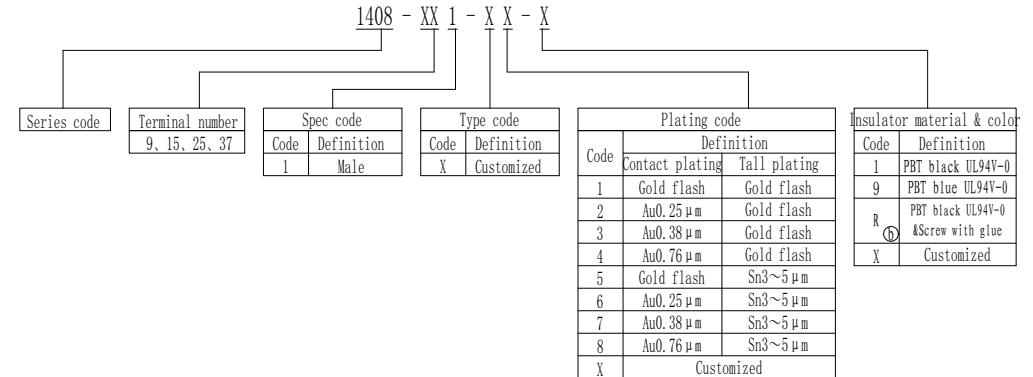

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

①	1	600196	xudongbin	2023.05.29
②	1	PCN-201501047	mh huang	2015.01.22
③	4	SN-00003065	daisyliu	2013.09.17
Mark	NO.	File NO.	Signature	Date
DRAW			lei	2008.12.17
CHK				
MAN			Lawrence	2023.07.03
STD			xyliu	2023.07.04
APP			Tim	2023.07.04

D-SUB
PCB Right angle, solder tail
Male

1408-XX1-XX-X





SL0. 1408. 100

Projection	Rev.	Weight	Scale
	A3		

All Dimensions in mm Sheet 1 of 2

SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.

The installation of the definition of the type of table:

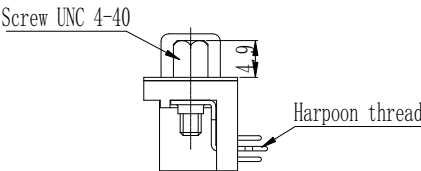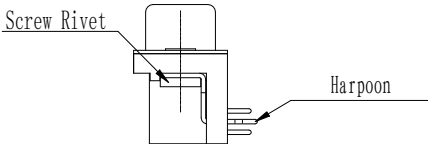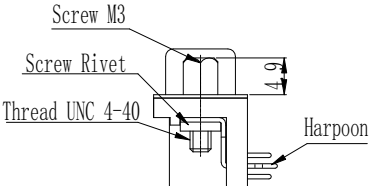Code	Definition	Number	Installation diagram
0	Harpoon thread+ screw	1408-XXX-0X-X	
1	Screw Rivet+Harpoon+Screw	1408-XXX-1X-X	
5 (K)	Screw Rivet+Harpoon	1408-XXX-5X-X	
A	Screw Rivet+Harpoon+Screw	1408-XXX-AX-X	

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

©	1	600196	xudongbin	2023.05.29	D-SUB PCB Right angle, solder tail Male	SL0. 1408. 100			
ⓑ	1	PCN-201501047	mh huang	2015. 01. 22		Projection	Rev.	Weight	Scale
Ⓐ	4	SN-00003065	daisyliu	2013. 09. 17			A3		
Mark	NO.	File NO.	Signature	Date		All Dimensions in mm Sheet 2 of 2			
DRAW			lei	2008. 12. 17	1408-XX1-XX-X	 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			
CHK			Lawrence	2023.07.03					
MAN			xyliu	2023.07.04					
STD			Tim	2023.07.04					
APP									