

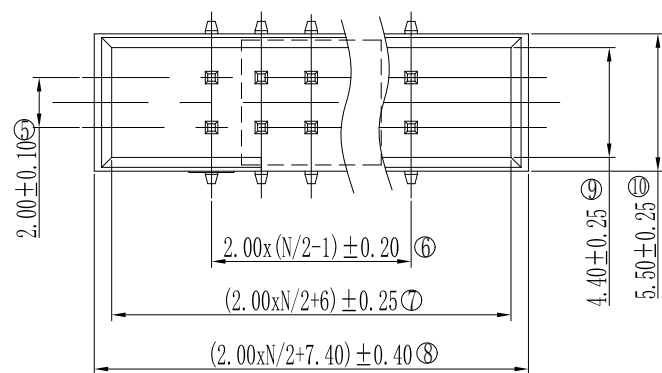
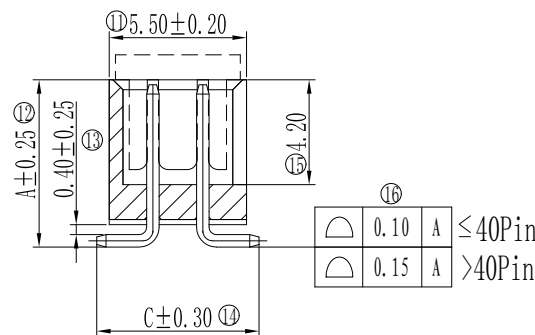


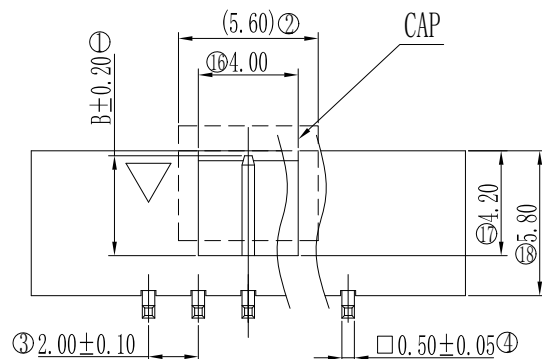

N:Total number of contacts

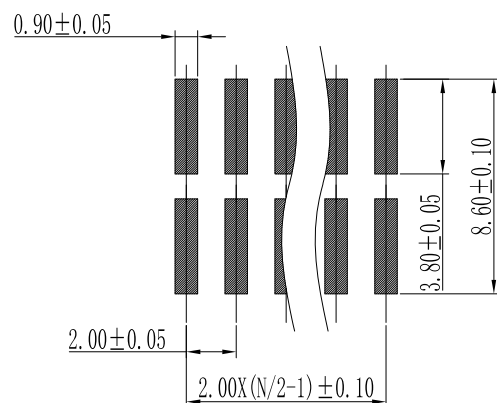

RECOMMEND PCB LAYOUT

Performance characteristics:

1.Main body part material

Insulator: See part number rule

Contact terminal:Brass,1.27 μm Ni under plated,Outer plating see spec list

2.Electrical requirements:

Current rating: 2 A

Contact resistance: ≤20 mΩ

Insulation resistance: ≥1000 MΩ

Withstanding voltage: 500 Vr.m.s, 1mA, 60s

3.Mechanical requirements

Retention force: ≥4.5 N/pin

4.Environment specification

Working temperature: -40℃~+105℃

Humidity: ≤93% at 40℃

Resistance to soldering heat: 260℃±5℃, 10s

5.Packing & storing


Method of packing: Tape&Reel, outer box

Storing condition: temperature of -10℃~+40℃
below 80% relative humidity

6.Style of installation: SMT

7.To prevent the pollution of the environment product info

RoHS agreement:In line with the european union RoHS.

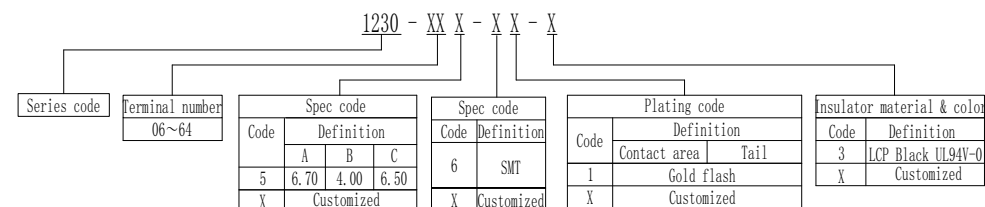

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

					2.00 Pitch Box Header SMT	SL0. 1230. 016			
Mark	NO.	File NO.	Signature	Date		Projection	Rev.	Weight	Scale
DRAW			Huanjiang Xu	2018.09.25			A0		
CHK			Tim	2018.9.28					
MAN			Spring	2018.9.28					
STD			Alan	2018.9.28					
APP					1230-XXX-6X-X	All Dimensions in  Sheet 1 of 1			
						 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			