



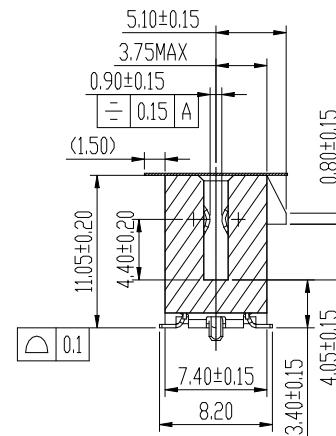


7.To prevent the pollution of the environment product info
RoHS agreement:In line with the european union RoHS.

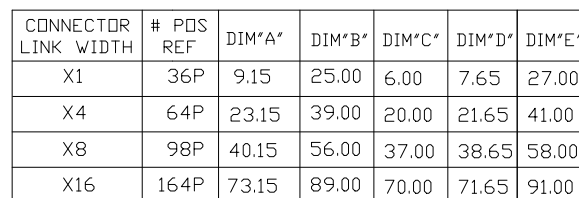

X.	± 0.50	X. °	$\pm 3^\circ$
.X	± 0.38	.X °	$\pm 2^\circ$
.XX	± 0.25		

1886 Series PCI EXPRESS 5.0 SMT TYPE	SLO. 1886. 009			
	Projection	Rev.	Weight	Scale
		B0		
1886-XXX-0X-X	All Dimensions in mm		Sheet 1 of 2	
	 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			



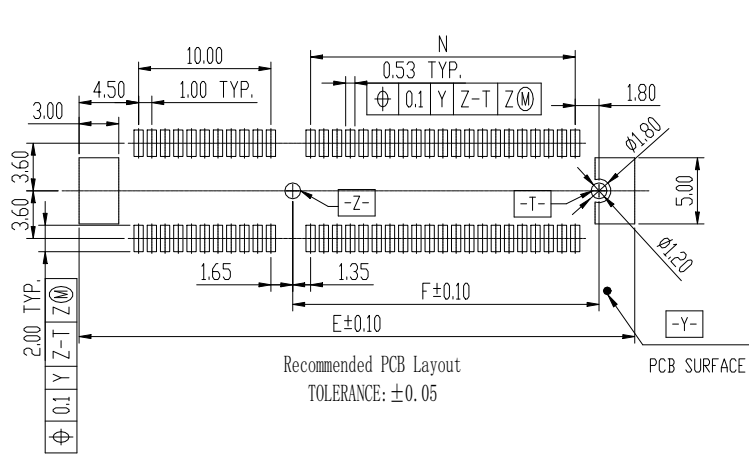


CONNECTOR LINK WIDTH	# PDS REF	N	DIM"E"	DIM"F"
X1	36P	6.00	28.00	9.15
X4	64P	20.00	42.00	23.15
X8	98P	37.00	59.00	40.15
X16	164P	70.00	92.00	73.15

CONNECTOR LINK WIDTH	# PDS REF	N	DIM"B"
X1	36P	6.00	8.15
X4	64P	20.00	22.15
X8	98P	37.00	39.15
X16	164P	70.00	72.15

NOTES:

- NO TIE BAR PERMITTED FROM CARD EDGE TO LEADING EDGE OF PAD FOR PINS A1 AND "C".
- CHAMFER EDGES MUST BE FREE OF CUTTING BURRS.
- TOLERANCE: .xx ±0.13.

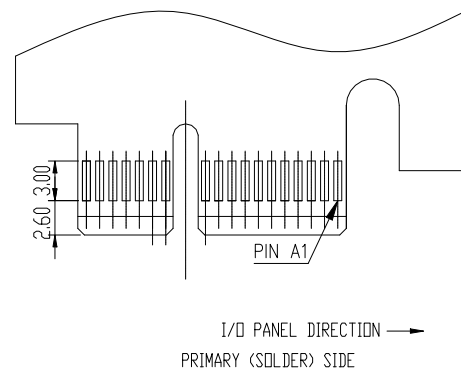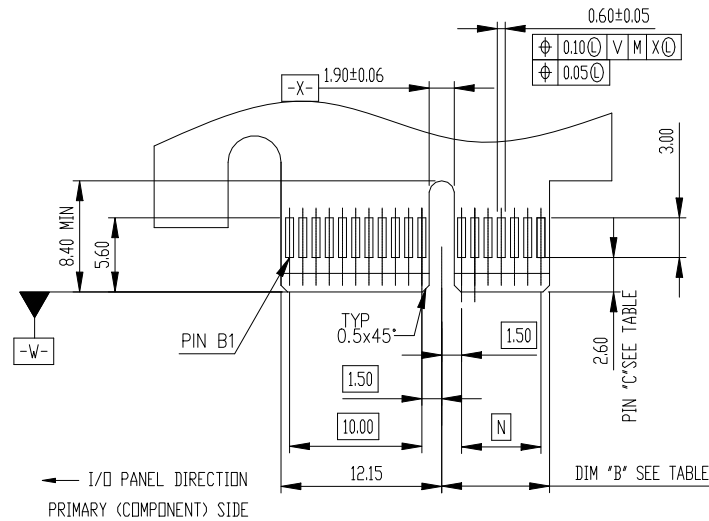

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

					1886 Series PCI EXPRESS 5.0 SMT TYPE	SLO. 1886. 009				
Mark	NO.	File NO.	Signature	Date		Projection	Rev.	Weight	Scale	
DRAW	ZhaoLin 2024. 08. 26							B0		
CHK						All Dimensions in mm Sheet 2 of 2				
MAN						 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.				
STD										
APP										
					1886-XXX-0X-X					