
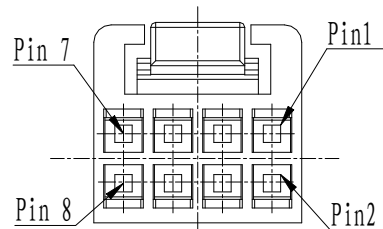
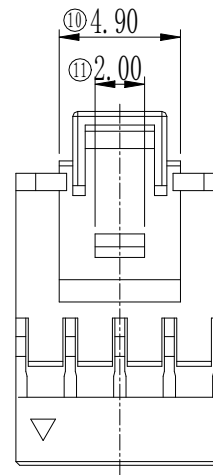
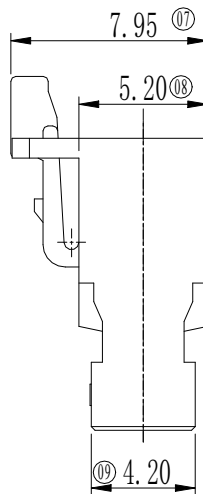
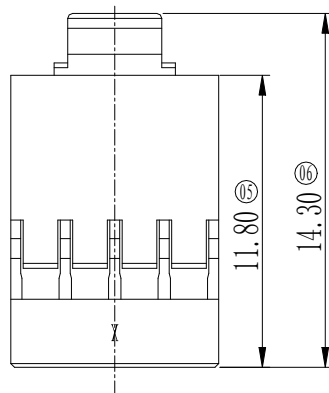
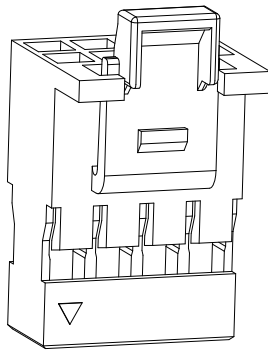


1 2 3 4 5 6 7

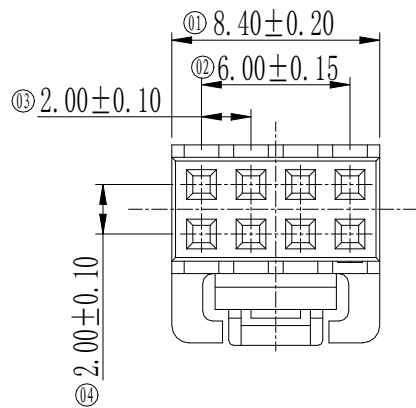

Performance characteristics:

1. Main body part material
Insulator: PA66 Black UL94V-0
2. Electrical requirements:
Voltage rating: 125 V
Insulation resistance: $\geq 1000 \text{ M}\Omega$ (after installation)
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s (after installation)
3. Environment specification
Working temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
4. Packing & storing
Method of packing: Plastic bag, outer box
Storing condition: Temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity
5. Style of installation: Applicable for crimp cable installation
7. To prevent the pollution of the environment product info
RoHS agreement: In line with the European Union RoHS.

Unless otherwise specified tolerance:

X.	± 0.50	X.°	$\pm 3^{\circ}$
.X	± 0.38	.X°	$\pm 2^{\circ}$
.XX	± 0.25		

					2.00mm pitch double row housing (2x4pin)	SL0.1230.035			
						Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A0		
DRAW	XiaoWei Pan 2025.01.16					All Dimensions in mm Sheet 1 of 1			
CHK									
MAN									
STD					12301241	 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			
APP									

1 2 3 4 5 6 7