


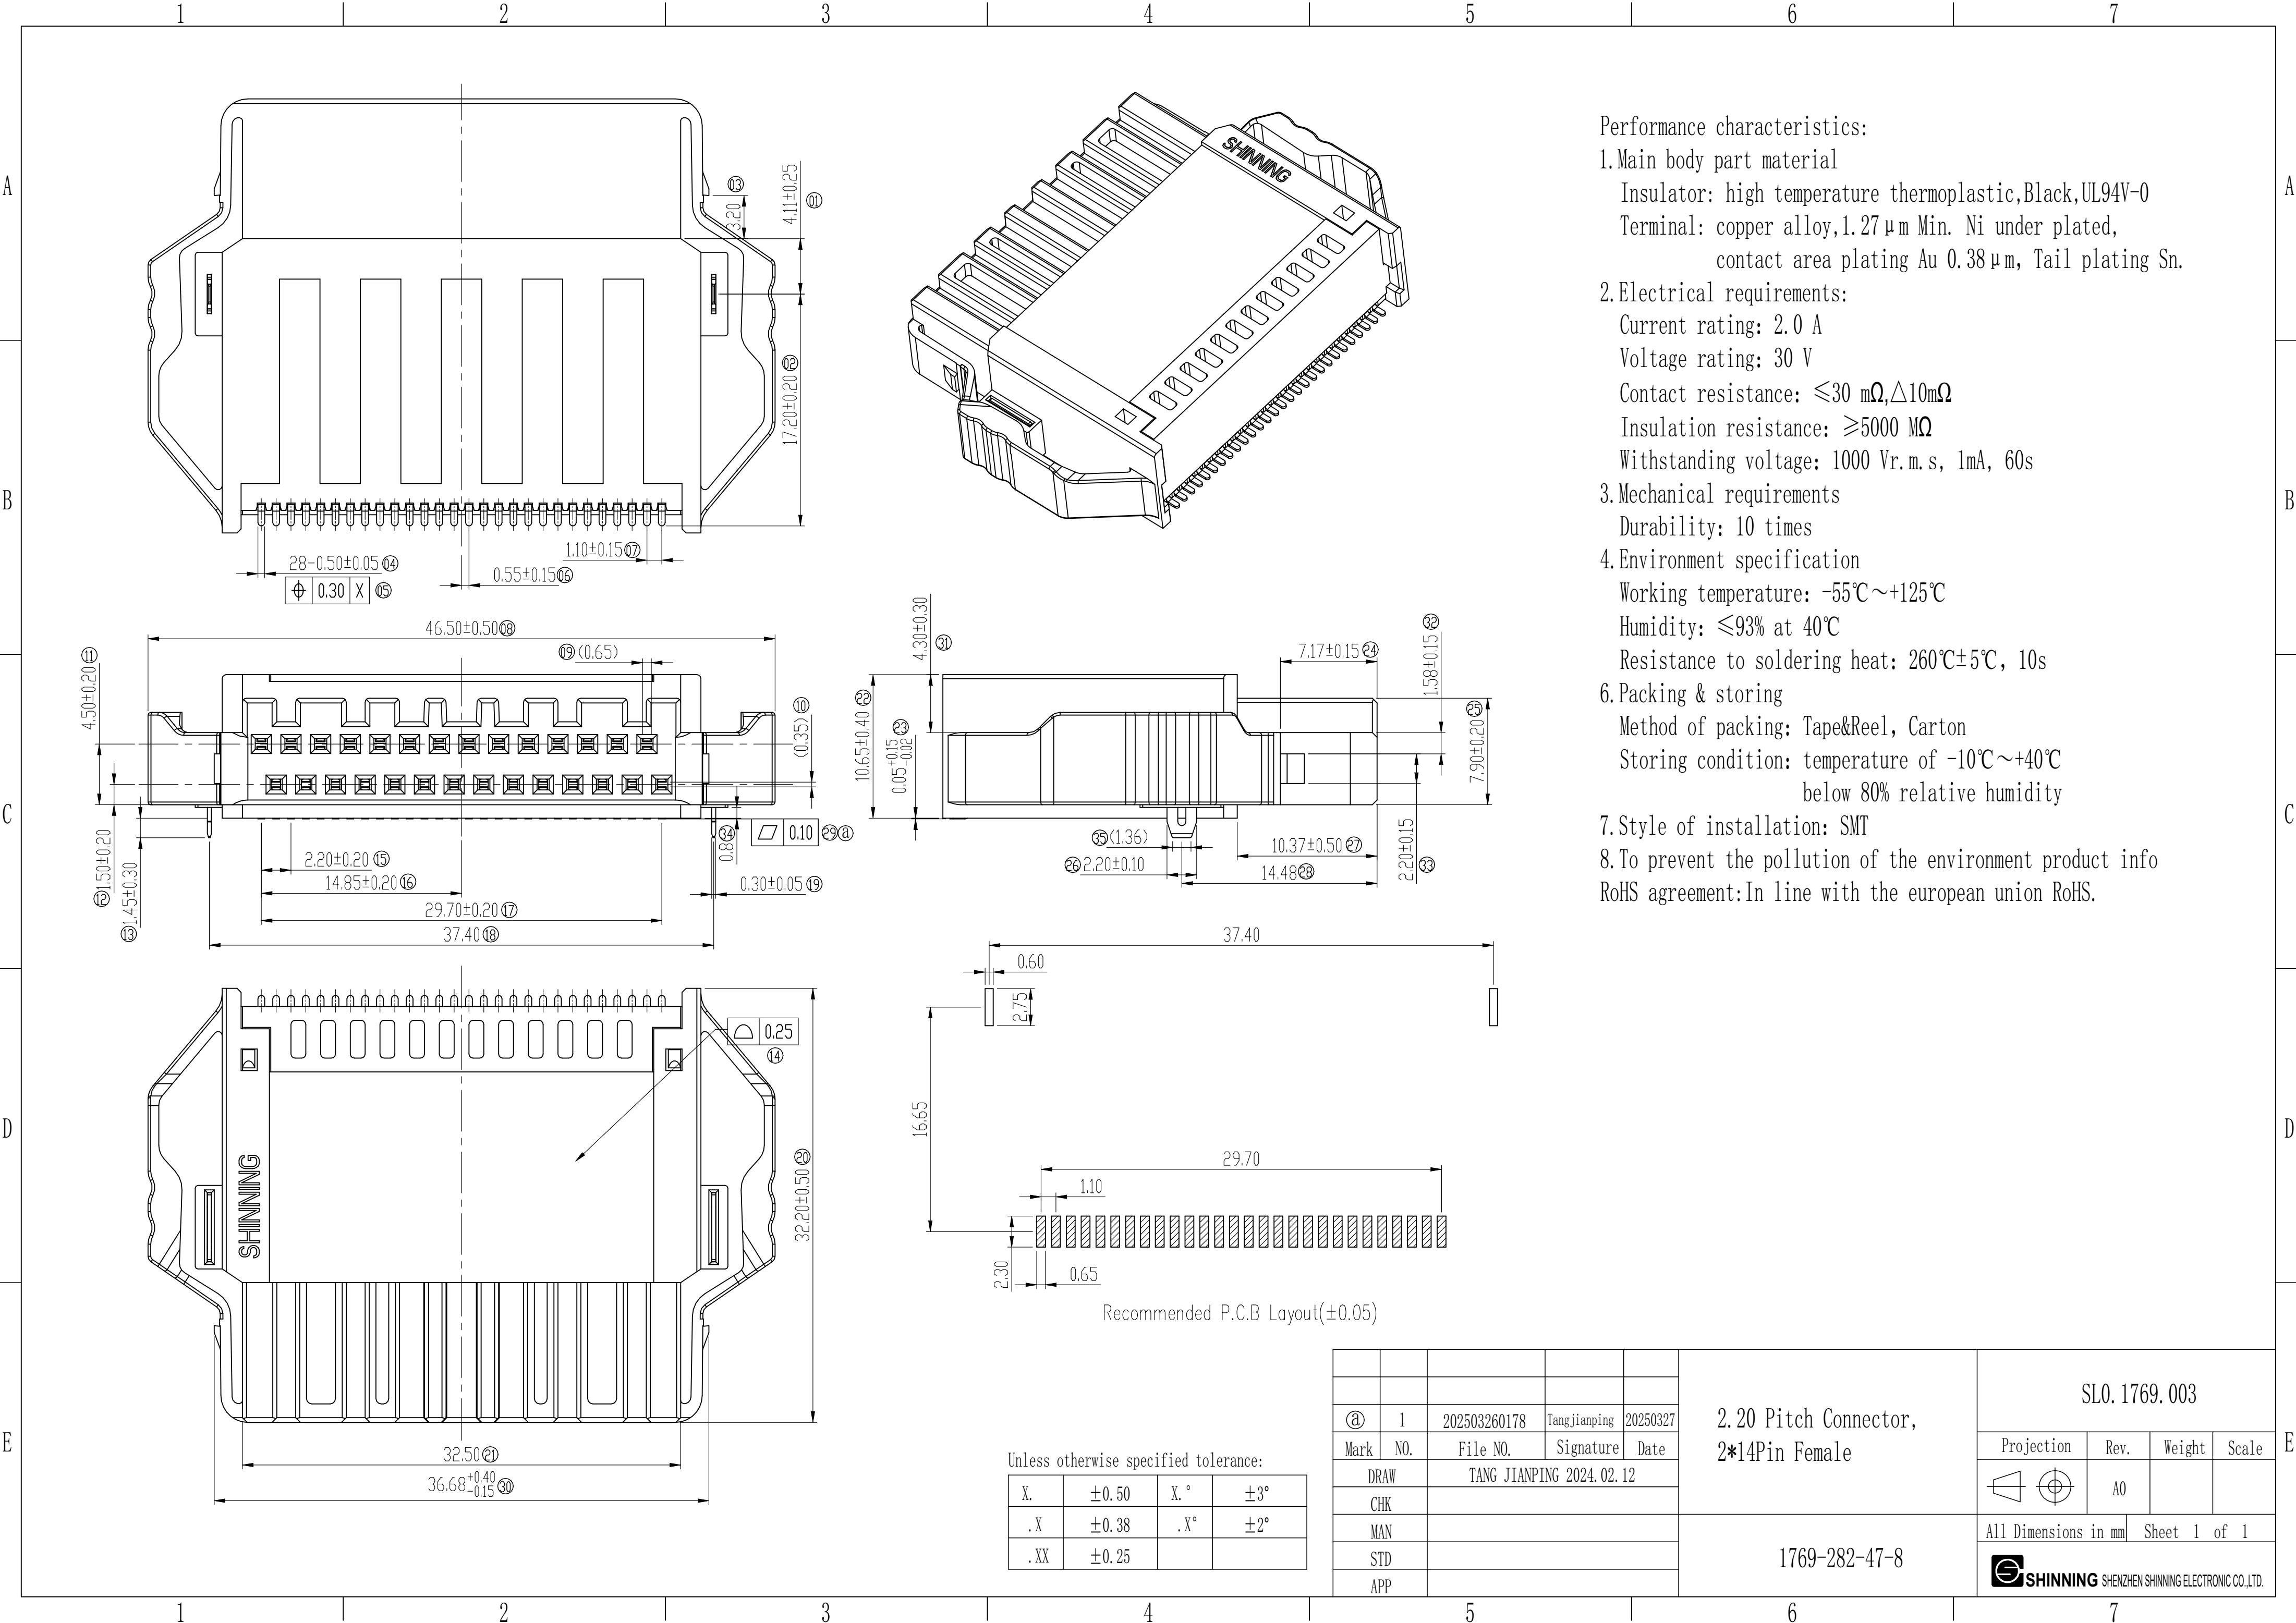

Performance characteristics:

1.Main body part material
Insulator: high temperature thermoplastic,Black,UL94V-0
Terminal: copper alloy,1.27 μm Min. Ni under plated,
contact area plating Au 0.38 μm, Tail plating Sn.

2.Electrical requirements:
Current rating: 2.0 A
Voltage rating: 30 V
Contact resistance: ≤30 mΩ,Δ10mΩ
Insulation resistance: ≥5000 MΩ
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

3.Mechanical requirements
Durability: 10 times

4.Environment specification
Working temperature: -55℃~+125℃
Humidity: ≤93% at 40℃
Resistance to soldering heat: 260℃±5℃, 10s

6.Packing & storing
Method of packing: Tape&Reel, Carton
Storing condition: temperature of -10℃~+40℃
below 80% relative humidity


7.Style of installation: SMT

8.To prevent the pollution of the environment product info
RoHS agreement:In line with the european union RoHS.

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

①	1	202503260178	Tangjianping	20250327
Mark	NO.	File NO.	Signature	Date
DRAW	TANG JIANPING 2024.02.12			
CHK				
MAN				
STD				
APP				

2.20 Pitch Connector, 2*14Pin Female	SL0.1769.003			
	Projection	Rev.	Weight	Scale
		A0		
1769-282-47-8	All Dimensions in mm		Sheet 1 of 1	
	 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			