


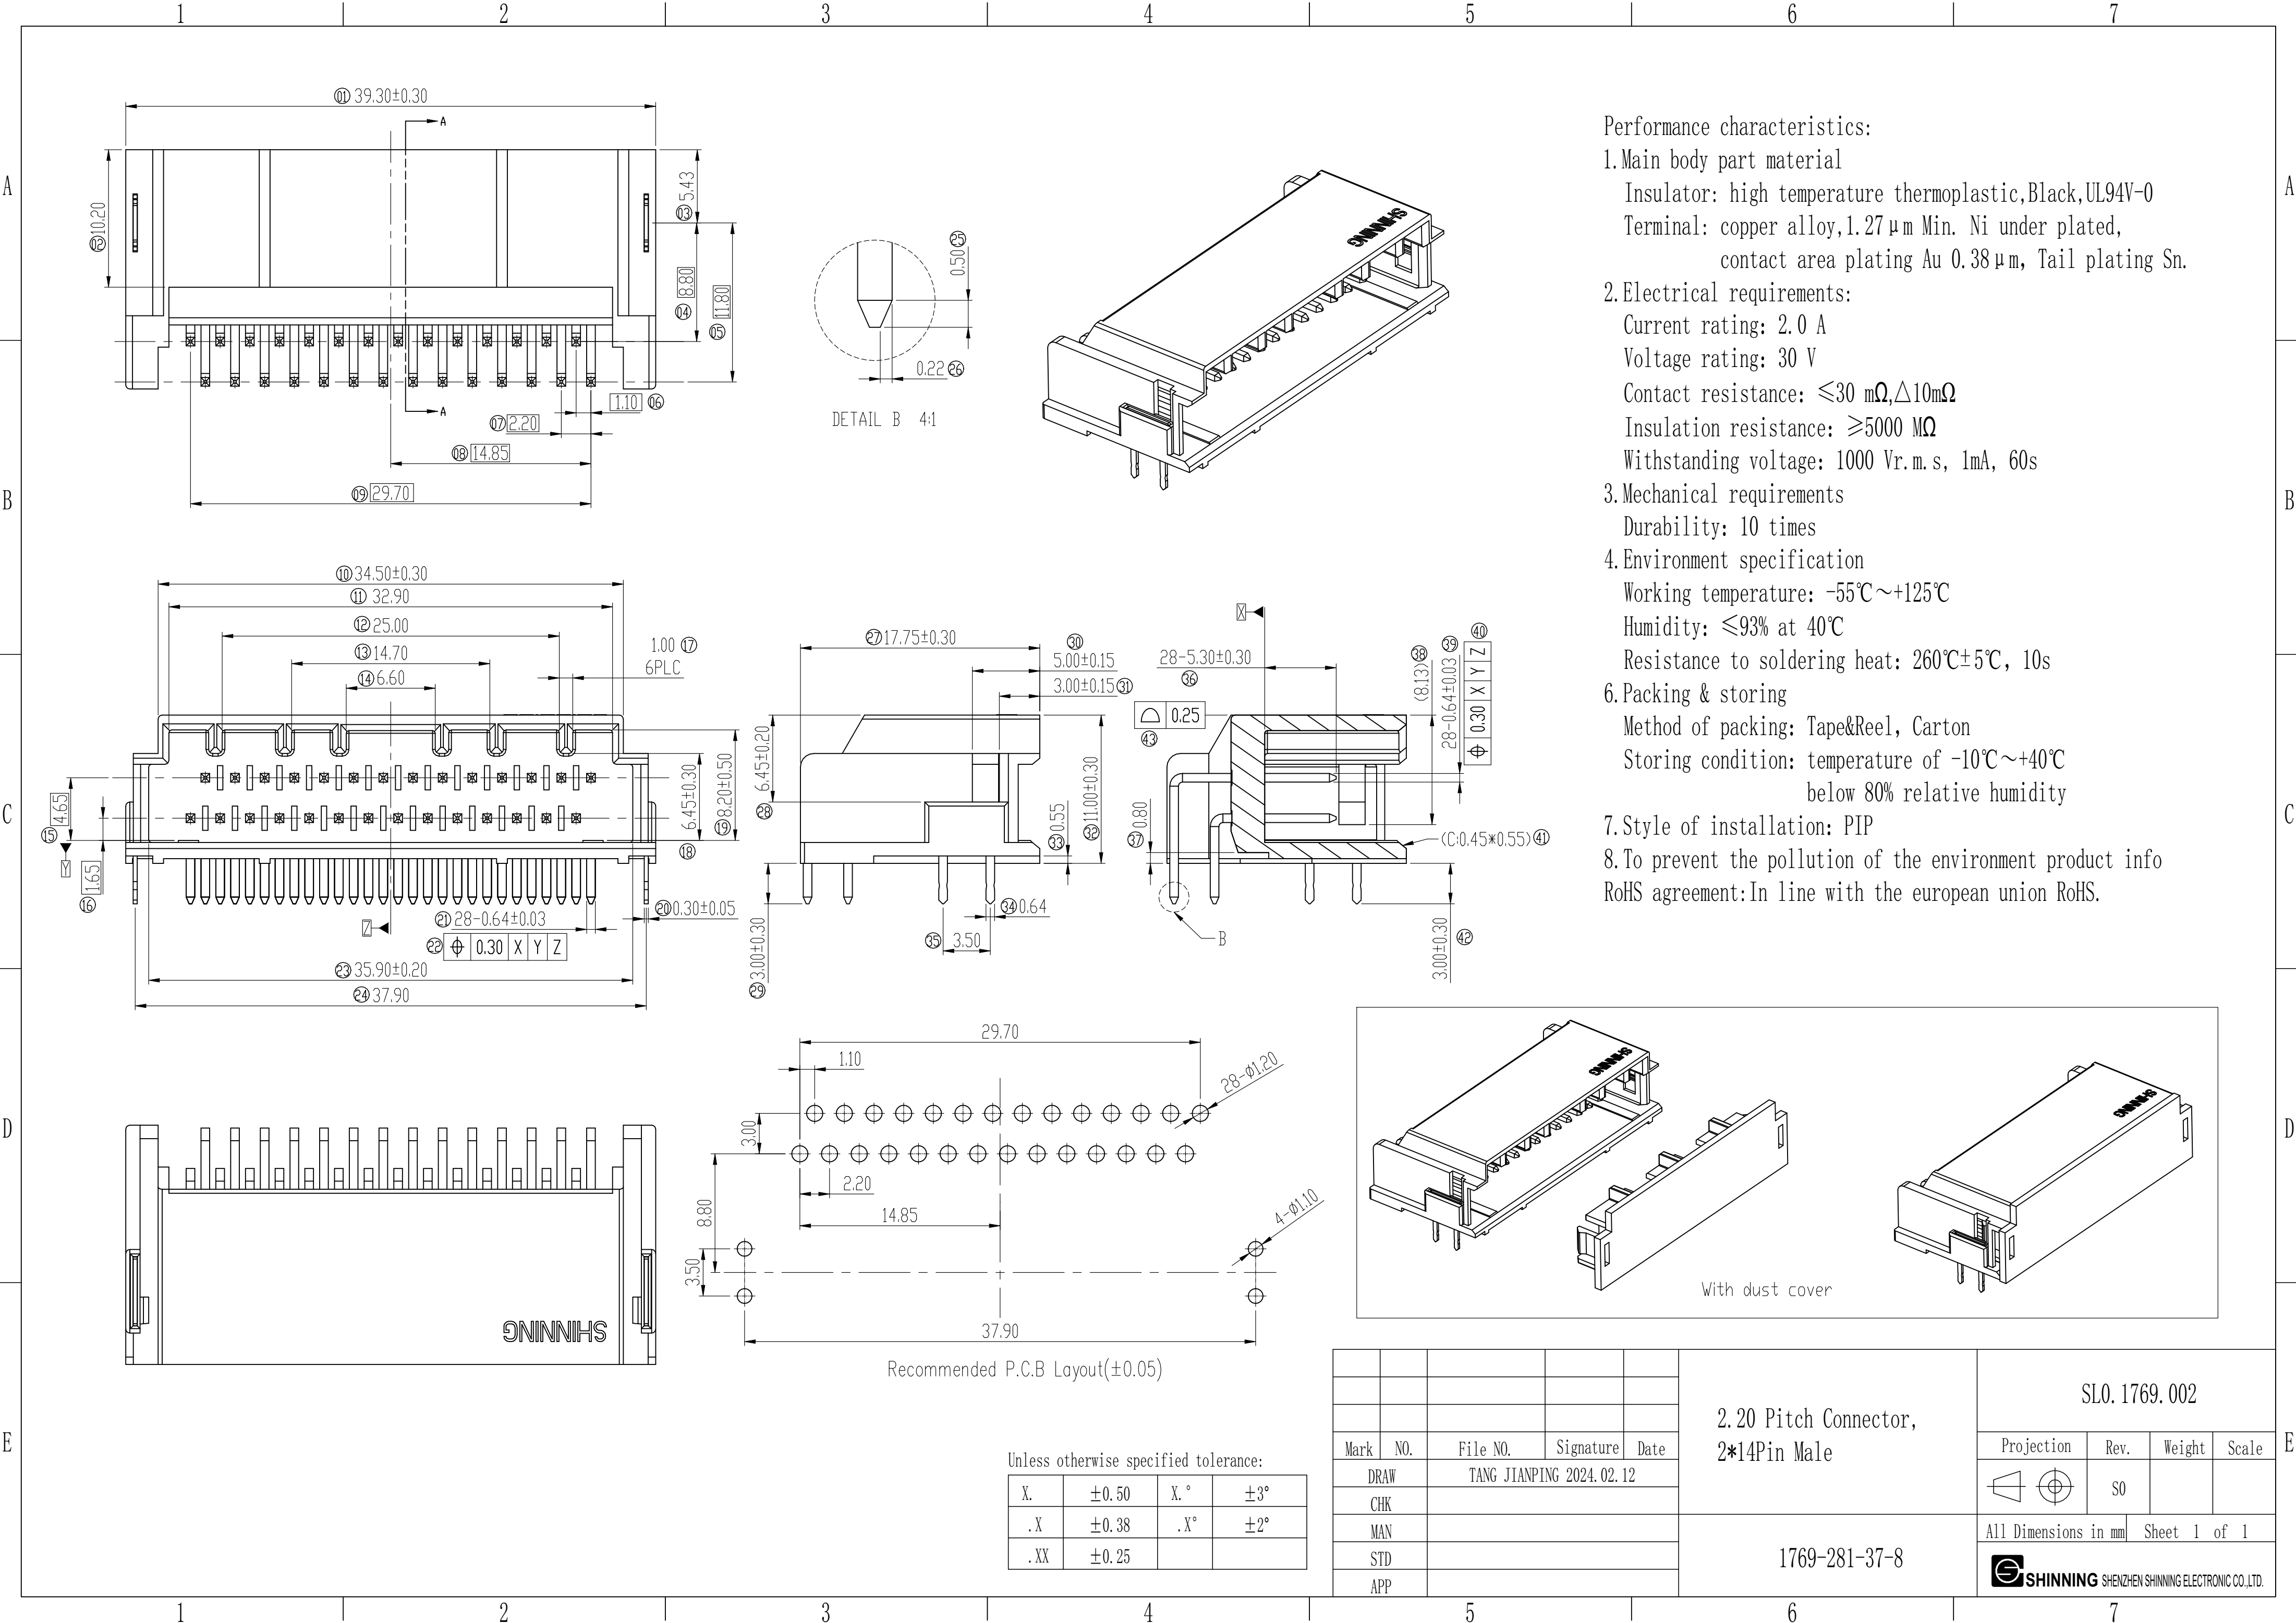

- Performance characteristics:
- 1.Main body part material
Insulator: high temperature thermoplastic,Black,UL94V-0
Terminal: copper alloy,1.27μm Min. Ni under plated,
contact area plating Au 0.38μm, Tail plating Sn.
 - 2.Electrical requirements:
Current rating: 2.0 A
Voltage rating: 30 V
Contact resistance: ≤30 mΩ,Δ10mΩ
Insulation resistance: ≥5000 MΩ
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s
 - 3.Mechanical requirements
Durability: 10 times
 - 4.Environment specification
Working temperature: -55℃~+125℃
Humidity: ≤93% at 40℃
Resistance to soldering heat: 260℃±5℃, 10s
 - 6.Packing & storing
Method of packing: Tape&Reel, Carton
Storing condition: temperature of -10℃~+40℃
below 80% relative humidity
 - 7.Style of installation: PIP
 - 8.To prevent the pollution of the environment product info
RoHS agreement:In line with the european union RoHS.

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Mark	NO.	File NO.	Signature	Date
DRAW		TANG JIANPING		2024.02.12
CHK				
MAN				
STD				
APP				

2.20 Pitch Connector,
2*14Pin Male

1769-281-37-8

SL0. 1769. 002			
Projection	Rev.	Weight	Scale
	S0		
All Dimensions in mm			
Sheet 1 of 1			