
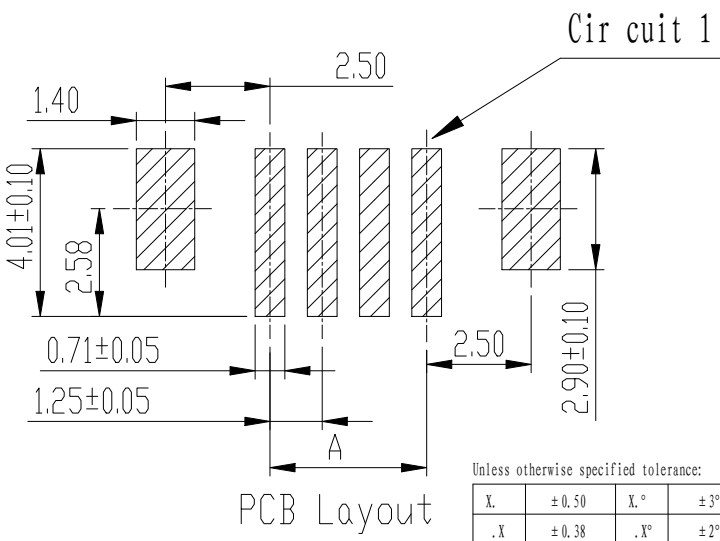
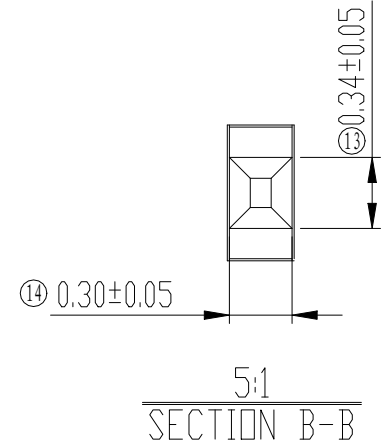


- Performance characteristics:
1. Main body part material  
Insulator: LCP Nature UL94V-0  
Contact terminal: Copper alloy, 1.27 μm Ni under plated, contact area plating Gold flash, tail plating Sn 3 μm Min.
  2. Electrical requirements:  
Current rating: 1 A  
Contact resistance: < 30 mΩ  
Insulation resistance: > 500 MΩ  
Withstanding voltage: 500 Vr.m.s, 1mA, 60s
  3. Mechanical requirements  
Retention force: > 3 N/pin
  4. Environment specification  
Working temperature: -45°C ~ +85°C
  5. Packing & storing  
Method of packing: Tape&reel, outer box  
Storing condition: temperature of -10°C ~ +40°C below 80% relative humidity
  6. Style of installation: (SMT)
  7. To prevent the pollution of the environment product info  
RoHS agreement: In line with the European Union RoHS.

Circuit	A	B	C
02	-	7.50	2.00
03	2.50	8.75	3.45
04	3.75	10.00	3.45
05	5.00	11.25	3.45
06	6.25	12.50	3.45
07	7.50	13.75	4.75
08	8.75	15.00	4.75
09	10.00	16.25	4.75
10	11.25	17.50	4.75
11	12.50	18.75	6.00
12	13.75	20.00	6.00
13	15.00	21.25	6.00
14	16.25	22.50	6.00
15	17.50	23.75	6.00
20	23.75	30.00	6.00
25	30.00	36.25	6.00
30	36.25	42.25	6.00

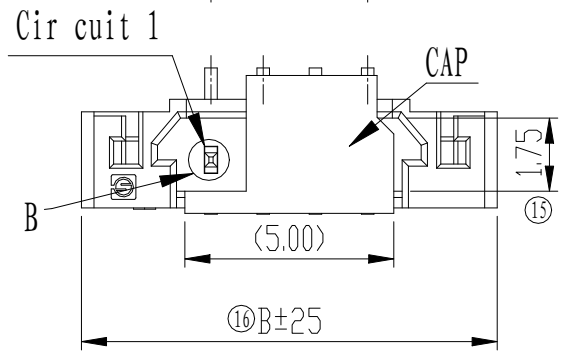

Unless otherwise specified tolerance:

X.	± 0.50	X.°	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

Mark	NO.	File NO.	Signature	Date
DRAW			Yong Zhang	2025.02.27
CHK				
MAN				
STD				
APP				

1.25mm Pitch Wafer Type 8 SMT		SL0.1341.044			
Projection	Rev.	Weight	Scale		
	A0				
All Dimensions in mm			Sheet 1 of 1		
1341-XX8-45-N		SHENZHEN SHINNING ELECTRONIC CO.,LTD.			