

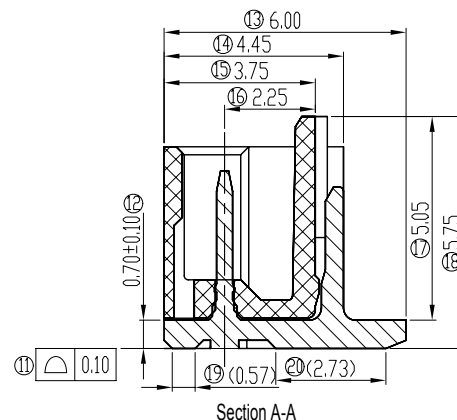
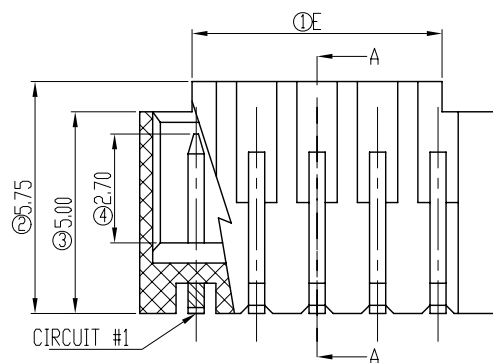
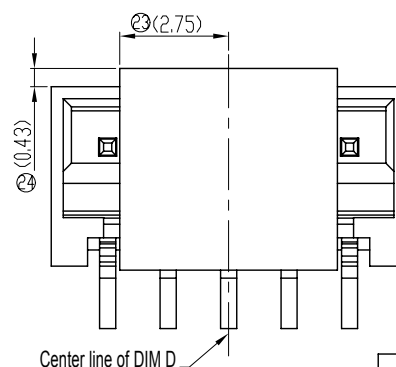
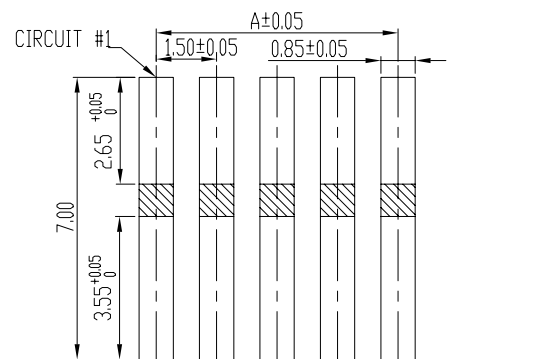




- Performance characteristics:
- 1.Main body part material
Insulator: PA6T Nature UL94V-0
Contact terminal: Brass Ni 1.27 μ m Min. under plated,
Outer plating see part number rule
 - ② CAP: LCP Nature UL94V-0
 - 2.Electrical requirements:
Current rating: 3 A
Contact resistance: ≤ 40 m Ω
Insulation resistance: ≥ 1000 M Ω
Withstanding voltage: ≥ 500 Vr.m.s, 1mA, 60s
 - 3.Environment specification
Working temperature: -55 $^{\circ}$ C ~ +105 $^{\circ}$ C
 - 4.Packing & storing
Method of packing: Reel
Storing condition: temperature of -10 $^{\circ}$ C ~ +40 $^{\circ}$ C
below 80% relative humidity
 - 5.Style of installation: SMT
 - 6.To prevent the pollution of the environment product info
RoHS agreement:In line with the european union RoHS.

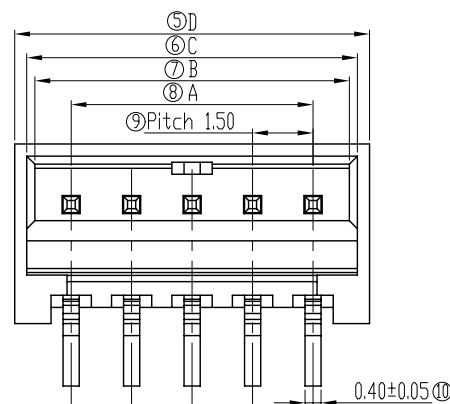


Applicable PCB Layout

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

					1.50mm Pitch SMT Wafer		SL0.1342.001			
					(Tellabs)		Projection	Rev.	Weight	Scale
								A1		
					1342-XXX-1B-P-T		All Dimensions in mm Sheet 1 of 2			
							SHINNING SHENZHEN SHINNING ELECTRONIC CO., LTD.			

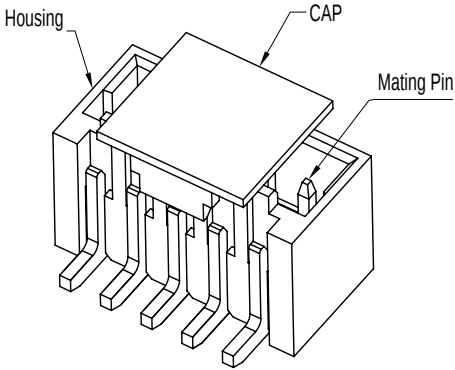

Circuit	A	B	C	D	E
2	1.50	3.30	3.70	4.30	1.70
3	3.00	4.80	5.20	5.80	3.20
4	4.50	6.30	6.70	7.30	4.70
5	6.00	7.80	8.20	8.80	6.20
6	7.50	9.30	9.70	10.30	7.70
7	9.00	10.80	11.20	11.80	9.20
8	10.50	12.30	12.70	13.30	10.70
9	12.00	13.80	14.20	14.80	12.20
10	13.50	15.30	15.70	16.30	13.70
11	15.00	16.80	17.20	17.80	15.20
12	16.50	18.30	18.70	19.30	16.70
13	18.00	19.80	20.20	20.80	18.20
14	19.50	21.30	21.70	22.30	19.70
15	21.00	22.80	23.20	23.80	21.20

1342-XX4-1B-P-T

Series code		Terminal number		Style of installation		Spec code		Plating code		Insulator material & color		Client Name	
		02~15											
Code	Definition	Code	Definition	Code	Definition	Code	Definition	Code	Definition	Code	Definition	Code	Definition
4	SMT	1	With CAP	B	Sn	P	PA6T Nature UL94V-0	T	Tellabs				
X	Customized	X	Customized	X	Customized	X	Customized	X	Customized				

Unless otherwise specified tolerance:

X.	± 0.50	X.°	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

					1.50mm Pitch SMT Wafer (Tellabs)	SL0.1342.001			
①	1	SN-00000120	An. Cheng	2011-04-26		Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A1		
DRAW		An.Cheng 2011.03.04							
CHK									
MAN									
STD				1342-XXX-1B-P-T		All Dimensions in mm		Sheet 2 of 2	
APP						 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			